




**36 LED Retractable Worklight
with Powerful Spotlight**


Instruction Manual

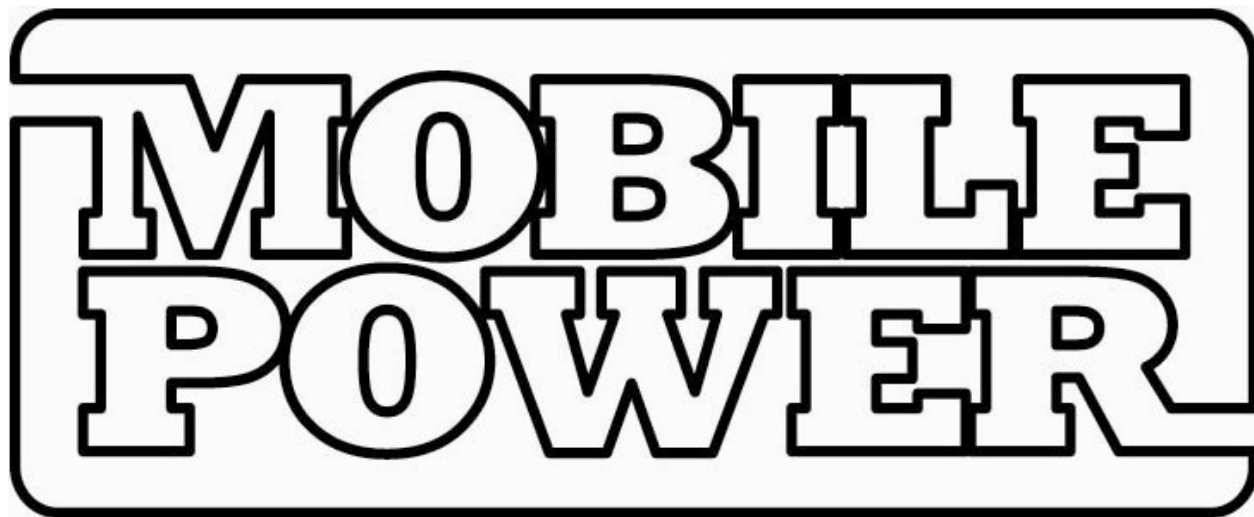

MobilePower, LLC. 198 Okatie Village Drive • Suite 103-312 • Bluffton, SC 29909
[www. Mobilepower-us.com](http://www.Mobilepower-us.com) Office: (800) 708 - 8550
support@mobilepower-us.com
customerservice@mobilepower-us.com




Model No. 4030

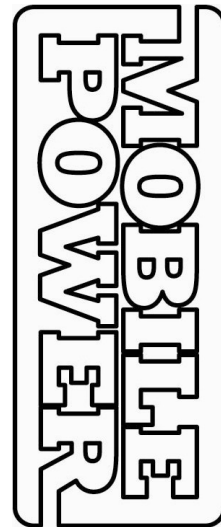

36 LED Retractable Worklight With Powerful Spotlight



Model No. 4030

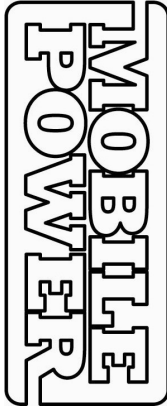

IMPORTANT INFORMATION

READ AND UNDERSTAND ALL WARNINGS AND THE ADVISORY NOTES INCLUDED IN THIS MANUAL. MAKE CERTAIN THIS DEVICE IS FULLY CHARGED PRIOR TO FIRST USE.

WARNINGS

THIS PRODUCT CONTAINS RECHARGEABLE BATTERY AND MUST BE DISPOSED OF PROPERLY. YOU MAY CONTACT YOUR LOCAL GOVERNMENT RECYCLING AUTHORITY FOR APPROPRIATE DISPOSAL. FAILURE TO FOLLOW THE INSTRUCTIONS MAY CAUSE DAMAGE TO THE PRODUCT AND OR PERSONAL INJURY.

IMPORTANT ADVISORY NOTES:

- Do not use this product for applications other than its intended use.
- Do not attempt to remove or replace the battery used in this device. When the battery has reached the end of its useful lifetime, take the entire unit to a battery recycling facility.
- This product is not intended for use in the rain or temperatures above 150°F.
- Use only the provided chargers. Unauthorized parts may damage the unit.
- This product has no consumer serviceable parts.
- This unit has a built-in rechargeable battery. Although LightBolt arrives partially charged from the factory, it **MUST** be fully charged before the first use.
- Recharge this unit after each use or every 6 months preventing the battery voltage to become extremely low.
- Do not use if this product if it is broken, cracked or exhibits damaged parts. Inspect before each use.
- Do not illuminate directly into eyes.
- Do not leave the light turned on and unattended.
- This product is NOT waterproof. Do not submerge in water.
- Do not expose to fire or high temperatures. The battery may explode.
- Do not charge or use near open flames.
- Keep out of the reach of children.

FEATURES:

This Rechargeable bright LED Spotlight features a rechargeable battery and powerful Retractable Worklight that can be used for up to 4 hours in one full charge. Designed for automotive work, roadside repairs, outdoors, emergencies and power outage. Low Battery Power Consumption. Strong Magnetic base for mounting on metallic surfaces. Robust and Impact resistant rubberized housing.




Model No. 4030

CHARGING INSTRUCTIONS:

CAUTIONS

- Prior to charge this device, read and understand all the related instruction indicated below. Fully charge the unit after each use or every 6 months. This product may arrive partially charged from the factory. It is highly recommended to fully charge the LIGHTBOLT unit after purchase and before using it for the first time.
- Make certain that all ON/OFF Power Switches are set in the OFF position.
- Do not charge the LIGHTBOLT near flammable material, open flame or any location which accumulate flammable fumes.
- Make certain the electrical outlet located in a potentially wet or moist area that is to be used to charge this device, is protected by a Ground Fault Circuit Interrupter (GFCI).

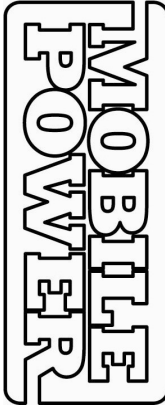

A. AC Charging At Home with 110 Volt AC Charging Adaptor:

1. Make certain the Spotlight ON/OFF Button is in OFF position and the Worklight retracted fully all the way down in OFF position while charging.
3. Connect the AC Charging Plug at the of cable, into the Input Charging Port of the LightBolt unit.
4. Connect the AC Charging Adaptor into the 110 Volt AC home receptacle. The LED near the Input Charging Port illuminates RED indicating the internal battery is being charged.
5. Fully charge the LightBolt according to the following schedules:
First time charge: 6 hours or when the RED LED charge indicator turns GREEN.
Recharge and subsequent charge: 3 hours or when the RED LED charge indicator turns GREEN.
6. Unplug the AC Charging Adaptor from 110 Volt receptacle first and then remove the Plug from the LightBolt Input Charging Port.

B. DC Charging In Your Vehicle with 12 Volt DC Charging Adaptor:

1. Make certain the Spotlight ON/OFF Button is in OFF position and the Worklight retracted fully all the way down in OFF position while charging.
3. Connect the DC Charging Plug at the of cable, into the Input Charging Port of the LightBolt unit.
4. Connect the DC Charging Adaptor into a Vehicle 12V DC or cigarette lighter socket. The LED near the Input Charging Port illuminates RED indicating the internal battery is being charged.
5. Fully charge the LightBolt for 2 1/2 hours or when the RED LED charge indicator turns GREEN.
6. Unplug the DC Charging Adaptor from the 12V Vehicle DC socket first and then remove the Plug from the LightBolt Input Charging Port.



Model No. 4030

OPERATING INSTRUCTIONS:

Spotlight:

1. Make certain the light is retracted all the way down to the minimum height.
2. Press firmly the Spotlight ON/OFF Button marked "POWER" located on the forward near the front Spotlight lens.
3. To turn OFF the Spotlight, press firmly the Spotlight ON/OFF Button marked "POWER".

Worklight:

CAUTION: Make sure the Spotlight ON/OFF Button marked "POWER" is NOT directly aimed your eyes. The Worklight includes high intensity 30 LED's when turned ON. DO NOT AIM OR ILLUMINATE THE WORKLIGHT AT YOUR EYES OR OTHERS NEAR YOU WHEN IT IS IN "ON" POSITION.

1. Hold the LightBolt rubberized grip firmly with one hand. Make certain the Spotlight "POWER" Button is not facing you when continue to the next step.
2. Hold down to the forward part of the LightBolt with other hand and pull apart by extending the light all the way outward until it stops.
3. To turn OFF the Worklight, retract the light all the way down to the minimum height.

Magnetic Base:


NOTE: The LightBolt bi-directional and may be operated in any directions. The housing base is designed with magnetic disc (The earlier design was equipped with multiple magnetic discs) that can be mounted to any flat ferrous material.

1. Mount the base to any flat ferrous material (Carbon steel base).
2. Turn ON the Spotlight or extend the unit to illuminate the Worklight.
3. Reposition the light either in right side up, upside down or right angle to the mounting surface.


SPECIFICATIONS:

- **30 Super Bright LED Worklight.**
- **3.6V - 1000mAh Rechargeable Internal battery.**
- **6 Powerful and Bright LED Spotlight.**
- **4 hours Continuous Operation Worklight in one full charge.**
- **15 hours Continuous Operation Spotlight in one full charge.**
- **Impact and shock resistance Rubberized housing.**
- **Anti-slip Rubber Grips.**
- **Includes AC and DC Chargers.**
- **RoHS and CE Compliant.**
- **Product Dimensions Retracted: 10" H x 3" W**
- **Product Dimensions Extended : 15" H x 3" W**
- **Unit Weight: 1 lb. - 0 Oz**

NOTE: Specifications are subject to change without notice.

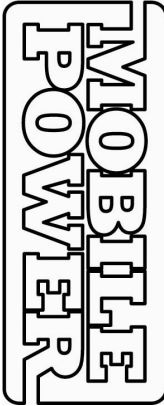

Model No. 4030

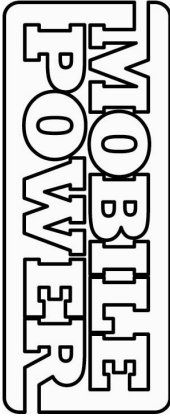

LIMITED PRODUCT WARRANTY AND LIABILITY

MobilePower, LLC. warrants to the original purchaser that this product shall be free from material defects in constructing material and workmanship for a period of two years from the original date of purchase except the internal rechargeable battery pack warranted for a period of one year. If the product is determined by MobilePower, LLC. to be defective in material and workmanship during the warranty period, MobilePower, LLC. will repair or replace the defective product or defective accessories/components with the factory original specifications product at MobilePower, LLC. option. The original purchaser is entitled to obtain this warranty with the proof of purchase within the warranty period. To obtain a return authorization and shipping instructions related to the warranty services in North America visit us at www.mobilepower-us.com or call (800) 708 – 8550 Customer Support or contact us at support@mobilepower-us.com. You may ship the defective product with freight prepaid to MobilePower, LLC. Your replacement will be mailed back to you at no additional charge.

Great care must be taken when packing the product and all associated accessories into a suitable packing box along with original dated purchasing receipt or invoice. The package must include a letter stating the defect details, contact information including physical address. Any address with a PO Box will not be processed and will be held until further notification from the consumer. Make certain that your package can be tracked when you are shipping the defective products to us. MobilePower, LLC will not be responsible for lost packages sent by consumers. MobilePower, LLC. Will not be responsible for damages incurred during shipment to our facilities. Failure to provide the original purchase receipt or proof of purchase will render this warranty invalid.

THIS WARRANTY SHALL NOT APPLY IF THIS PRODUCT (A) IS DAMAGED RESULTING FROM ABUSE, MISUSE, NEGLIGENCE, ACCIDENT, LACK OF MAINTENANCE, WEAR AND TEAR, UNREASONABLE USE OR BY OTHER CAUSES UNRELATED TO THE DEFECTIVE MATERIAL OR WORKMANSHIP; (B) IS USED WITH PRODUCTS THAT ARE NOT COMPATIBLE WITH VEHICLE BOOSTING SYSTEM; (C) IS USED FOR COMMERCIAL PURPOSES; (D) IF THE PRODUCT HAS BEEN SUBJECTED TO WATER AND FIRE.

This warranty provides you with specific legal rights, and you may also have other rights which vary from state to state. This warranty is valid only in North America.



MobilePower, LLC. 198 Okatie Village Drive . Suite 103-312 . Bluffton, SC 29909
[www. Mobilepower-us.com](http://www.Mobilepower-us.com) Office: (800) 708 - 8550
support@mobilepower-us.com
customerservice@mobilepower-us.com




Sheet 6 of 8

Made in China

Model No. 4030




NOTES:

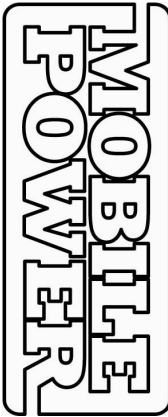

MobilePower, LLC. 198 Okatie Village Drive . Suite 103-312 . Bluffton, SC 29909
[www. Mobilepower-us.com](http://www.Mobilepower-us.com) Office: (800) 708 - 8550
support@mobilepower-us.com
customerservice@mobilepower-us.com

Model No. 4030

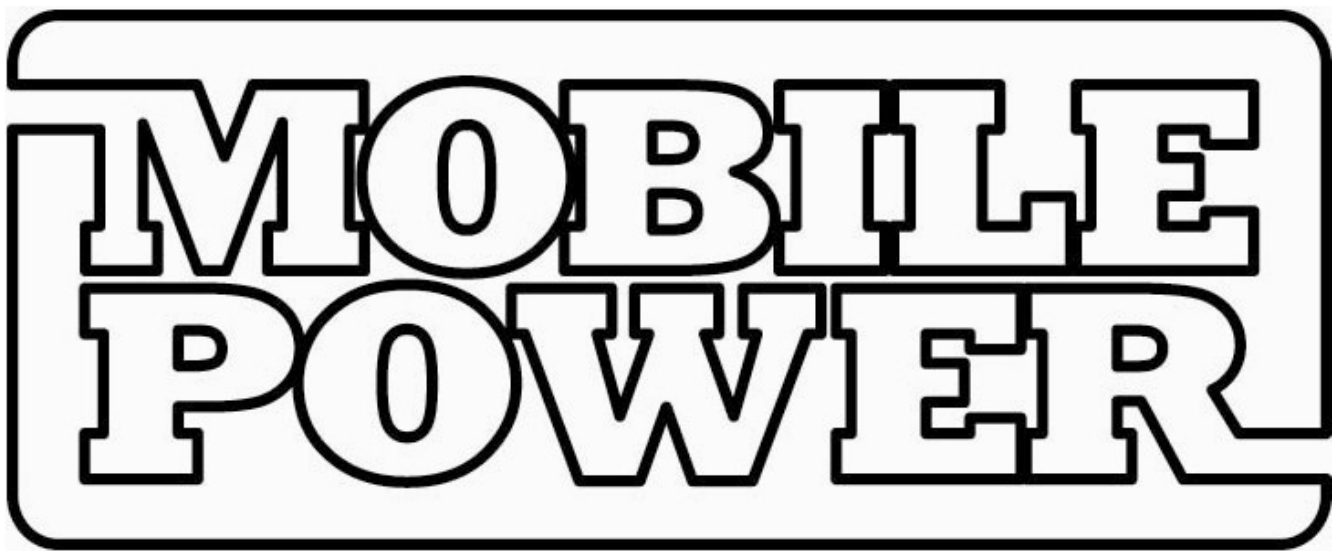

MobilePower, LLC. 198 Okatie Village Drive . Suite 103-312 . Bluffton, SC 29909
[www. Mobilepower-us.com](http://www.Mobilepower-us.com) Office: (800) 708 - 8550
support@mobilepower-us.com
customerservice@mobilepower-us.com