



Photo is EU variant. Photo: Kaslov Studio

Weblink
227

Design
Poul Henningsen

Concept
PH 3-2½ Wall provides mainly downwards illumination. The PH 3-2½ Wall is based on the principals of a reflecting multi-shade system creating harmonious and glare free illumination. The shades are drawn over a logarithmic spiral with the center of the light source placed in the spiral's focal point.


Finish
Copper plated, brushed. Black, powder coated.

Material
Top shade: Spun stainless steel or spun untreated copper. Middle/lower shade: Black or copper plated, spun stainless steel. Shadeholder: Die formed glass. Mounting plate: Die cast aluminum. Mounting plate cover: Spun aluminum or copper. Arm: Stainless steel.

Mounting
Surface: Mounted directly to finished surface over a recessed 4" octagonal junction box.

Weight
Max. 5.5 lbs.

Label
cUL, Wet location. IBEW.

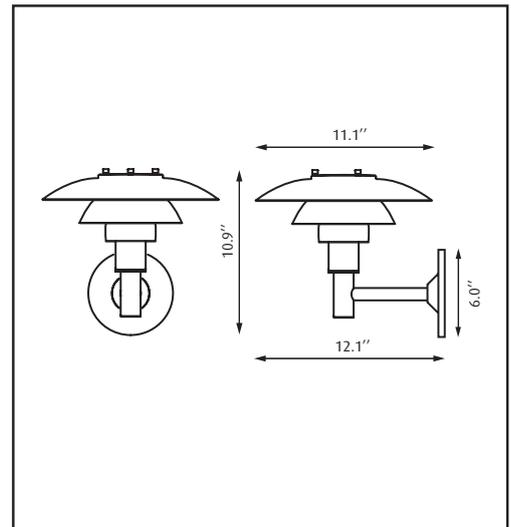

Product code	Light source	Voltage	Finish
PH3-2½W	1/60W/A-19/IF medium	120V	BLK COP

Info notes:
I. The comparable EU version has the following classification: Ingress Protection Code: IP44.

