

WIRELESS FORECAST STATION



MODEL: 308-1415FCT


DC: 081519

For more product information visit: bit.ly/laxtech_support

POWER UP


1. Insert 2-AA batteries into your Outdoor Sensor.
2. Insert 2-AA batteries into your Forecast Station.
3. Once the sensor is reading to your display, place it outside in a shaded location to protect it from the sun's heat.

Watch sensor mounting video: bit.ly/TH_SensorMounting

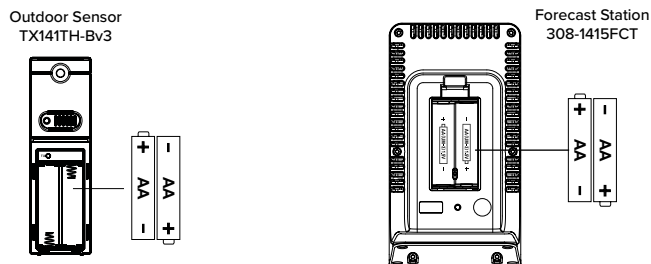

INDOOR COMFORT INDICATOR

The Indoor Comfort Indicator is based on your Indoor Humidity. The arrow will indicate comfort level.

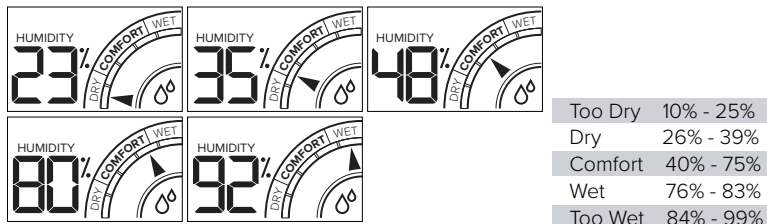

SETTINGS

1. Hold the button to enter the Settings Menu.
2. Use the + or - button to adjust values.
3. Press the button to confirm and move to next item.
4. Press the button anytime to exit.

Settings Menu Order:

- Greeting “Hello, Set up time”
- Language (English | Español | Français)
- 12/24 Hour Time
- Hour
- Minutes
- Year
- Month
- Date
- Date/Month or Month/Date
- Fahrenheit/Celsius
- Thank You

Greeting: The “HELLO, SET UP TIME” message will automatically appear when the unit is first powered on, an indication to adjust your settings.

Language: Whichever language is selected, the following instructions and weekday will be presented in that language.

Weekday: The Weekday will set automatically when your Year, Month and Date are set.

TEMPERATURE/HUMIDITY ALERTS

1. Hold the button to enter the Alert Settings.
2. Use the + or - button to arm or disarm an alert.
3. When the alert is ON, the alert value will flash. Use the + or - button to set your custom alert value.
4. Press the button to confirm and move to next item, or exit.

- When an alert value is reached, the station will beep 5 times every minute, until the value is out of the alert range.
- Press any button to stop the alert from sounding.
- The flashing alert icon will indicate if it is a LO or HI alert.

Alert Icons:



HI/LO RECORDS


Press the HISTORY button to view your HI and LO Temperature and Humidity Records, Heat Index and Dew Point.

Reset HI/LO Records (each will reset individually):

1. Press the HISTORY button to view individual readings.
2. Hold the MINUS (-) button to reset an individual record.
3. Your HI/LO record will reset to the current reading, with current time and date stamp.

FORECAST ICONS

Your station uses changing atmospheric pressure to predict weather conditions for the next 12-hours. The Arrows indicate Pressure Tendency (rising, falling).

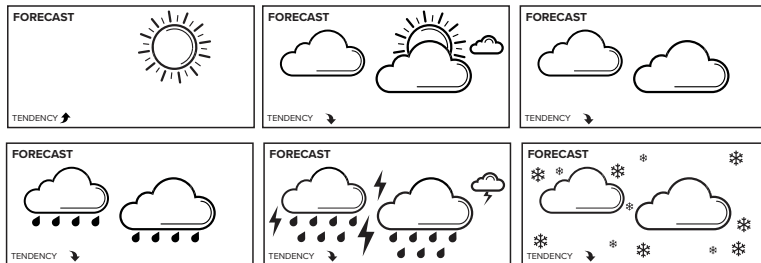

BUTTON FUNCTIONS

The Buttons are located on the front of your Weather Station.

	Hold to enter Settings Menu.
	Press to increase values in setting menus. In Alerts Mode press to arm or disarm alert. Hold to search for Outdoor Sensor.
HISTORY	Press to view HI/LO Temperature/Humidity Records, Heat Index and Dew Point Temperature.
	Press to decrease values in setting menus. In Alerts Mode press to arm or disarm alert. Hold to delete HI/LO Record.
	Hold to enter Alert Settings. Press to exit setting modes.

OUTDOOR SENSOR RECEPTION

- If sensor loses connection to your station, **NO** will show in the outdoor sensor area after 30 minutes.
- Your station will search 3 minutes every hour to reconnect with your sensor. While searching, **dashes** will show in the outdoor sensor area, and the Sensor Reception Icon will flash.
- Hold the PLUS (+) button 3 seconds to manually search for the outdoor sensor.

RESTART

When the outdoor readings show **NO** and searching for the sensor has not helped, complete a full restart:

- Bring the sensor in the house about five feet from the station.
- Remove batteries from the sensor, and from the station.
- Press any button 20 times.
- After 15 minutes, insert batteries into the sensor, and into the station.
- Wait another 15 minutes to establish a strong connection. Place sensor outside in shaded location.

SENSOR WEATHER SHIELD*

- The Sensor Weather Shield is designed to protect your outdoor sensor from rain and snow.

- This shield will offer limited protection from the sun's heat.

- Optional purchase at: bit.ly/925-1418



*Not included

WE'RE HERE TO HELP!

If you require additional support, get in touch with our friendly customer support team based out of La Crosse, WI.

Phone: 1-608-782-1610

Online: bit.ly/contact_techsupport

Our knowledgeable customer support team is available:
Monday-Friday, 8am-6pm CST.

JOIN THE CONVERSATION

Ask questions, watch detailed setup videos, and provide feedback on our social media outlets!



SPECIFICATIONS

Indoor Temperature Range: 32°F to 99°F (0°C to 37°C)

Indoor Humidity Range: 10% to 99% RH

Outdoor Temperature Range: -40°F to 140°F (-40°C to 60°C)

Outdoor Humidity Range: 10% to 99% RH

Transmission Range: Over 330 ft. (100 meters) RF 433MHz (open air)

Power Requirements:

Station: 2 "AA" batteries (sold separately)

TX141TH-Bv3: 2 "AA" batteries (sold separately)

Battery Life:

Station: Over 24 months

TX141TH-Bv3: Over 24 months

Dimensions:

Station: 3.24" L x 2.16" W x 5.98" H (8.23 cm L x 5.48 cm W x 15.19 cm H)

TX141TH-Bv3: 1.57" L x 0.82" W x 5.11" H (3.98 cm L x 2.08 cm W x 12.98 cm H)

WARRANTY INFO

La Crosse Technology, Ltd. provides a **1-year limited time warranty** (from date of purchase) on this product relating to manufacturing defects in materials & workmanship.

La Crosse Technology, Ltd, 2830 S. 26th St., La Crosse, WI 54601

For Full Warranty Details, Visit: www.lacrossetechnology.com/support

CARE + MAINTENANCE

- Do not mix old and new batteries.
- Do not mix Alkaline, Lithium, standard, or rechargeable batteries.
- Always purchase the correct size and grade of battery most suitable for intended use.
- Clean the battery contacts and also those of the device prior to battery installation.
- Ensure the batteries have with correct polarity (+ / -).
- Remove batteries from equipment that will not to be used for an extended period.
- Promptly remove expired batteries.

FCC STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Increase separation between equipment & receiver.
- Consult the dealer or an experienced radio/TV technician for help.

This device must not be co-located or operating in conjunction with any other antenna or transmitter.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

CAUTION!

The manufacturer is not responsible for any radio or TV interference caused by unauthorized changes or modifications to this equipment. Such changes or modifications could void the user authority to operate the equipment.

All rights reserved. This manual may not be reproduced in any form, even in part, or duplicated or processed using electronic, mechanical or chemical process without the written permission of the publisher.

This booklet may contain errors or misprints. The information it contains is regularly checked and corrections are included in subsequent editions. We disclaim any responsibility for any technical error or printing error, or their consequences. All trademarks and patents are recognized.

WARNING: This product can expose you to chemicals including styrene, which is known to the State of California to cause cancer. For more information go to: www.P65Warnings.ca.gov