


# 2.4G Wireless Dimming & CCT Adjustable LED Panel

## THE HANDHELD REMOTE CONTROLLER

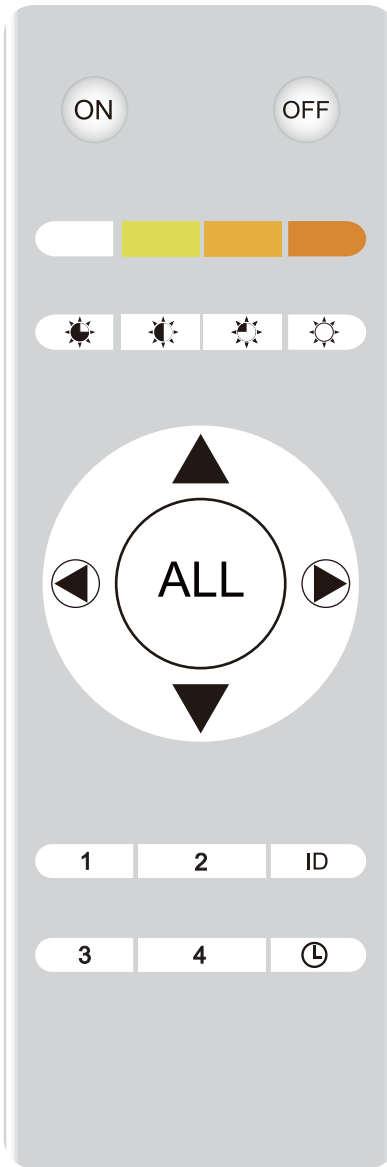

ON OFF	ON Turn on	OFF Turn off
ID	<b>Matching code for light</b> Long pressing the 'ID' button will keep the controller's indicator on, then turn on the light and release the 'ID' button after the light flashes, matching code complete. Matching code for several lights simultaneously is available.	
ID + ▼	<b>Release the code and disconnect light from remote controller</b> Press the button ID + ▼ together, then turn on the light, the light will flash to finish releasing the code on the lights.	
1 2 3 4	<b>Group selecting button</b> Grouping lights (matching code process needs to be completed first). Turn off the lights, continue pressing the group selection button for 3s, then turn on the lights, the lights will flash to finish grouping.	
⌚	<b>Turn-off delay</b> Press the ⌚ button, the delay function will begin after the light flashes once. The light will be turned off after 10s. Pressing the 'ON' button will cancel the delay function.	
ALL	<b>All Groups are selected</b>	
<b>Color temperature selecting/saving</b> After selecting the color temperature, press the button "OFF" then turn on the light to save the color temperature.		
5000K	3500K	
4000K	3000K	
☀️ 25% brightness	☀️ 75% brightness	
☀️ 50% brightness	☀️ 100% brightness	
▲ Increase brightness	◀️ Decrease color temperature	
▼ Decrease brightness	▶️ Increase color temperature	

\* After turned on, the light will automatically detect the 0-10v dimmer setting to determine the brightness. It will default to 100% brightness if there is no dimmer input.

\* If the dimmer is used, the light brightness will convert to 0-10v dimmer's current brightness setting.

\* If the remote controller is used, the light brightness will only change from its current brightness.