

BBQ THERMOMETER

INSTRUCTION MANUAL




MODEL: LTV-BBQ1 DC: 042122

More information can be found on our website here: https://www.lacrossetechnology.com/products/ltv-bbq1

POWER UP

- 1. Insert 2-AAA batteries into your BBQ Thermometer.
- 2. Hold the POWER button () to turn on or off.
- 3. Adjust time and temperature settings.

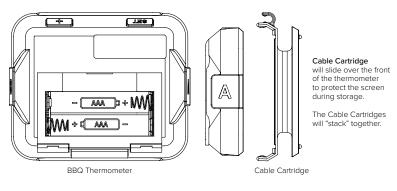

SETTINGS

- 1. Hold the SET button to enter the Settings Menu.
- 2. Use the PLUS (+) button to adjust, and the SET button to confirm and move to the next setting.

Settings Menu order:

- Hour
- Minutes
- Fahrenheit/Celsius

USE TEMPERATURE PROBE

- Unwind one or both Temperature Probe cords from the Cable Cartridge, and connect it into either the A or B jack on the side of the thermometer. Allow a few seconds for data to appear.
- 2. Insert the metal probe into the thickest part of your meat.







- With a single probe attached, the Probe Temperature will appear in the bottom section with the Time on top.
- If using two Temperature Probes, both readings will show on the display. Press the PLUS (+) button to switch between Time & top Temperature Probe readings.





- When no Temperature Probe is attached, only the Time will show.
 Display will automatically shut off after 7-10 minutes.
- Err will display if the Temperature Probe is not inserted fully into the jack, or if it is no longer in working order.

Note: If one or two probes are attached, the display will stay on until turned off. Hold the POWER button to turn off or turn on the display.

CONNECT TO THE LA CROSSE VIEW™ APP

If you already own a La Crosse View connected display, you can use the La Crosse View app to view your BBQ Thermometer readings, as well as set temperature alerts right on your phone.

- Open your La Crosse View app and select ADD DEVICES from the main menu.
- 2. Scan the bar code or type in the Device ID on the back of your BBQ Thermometer.
- 3. Give the device a Name and Location, and press Save.

For additional help, review our support video here: http://bit.ly/add_devices

TRANSMISSION INDICATOR

The Transmission Indicator relates to the Temperature Probe readings sent to your La Crosse View App.

- A solid indicator tells you your thermometer has power and the Temperature Probe is connected.
- This indicator will flash twice during each transmission
- No indicator will show if the thermometer is not updating to your app, or if your probe is not inserted.

Note: The LTV-BBQ1 thermometer is fully functional without being connected to the La Crosse view app.

BACKLIGHT

• Press any button for a 10 second backlight.

LOW BATTERY INDICATOR

When the Low Battery Indicator is displayed, replace the batteries.

WE'RE HERE TO HELP!

If you require additional support, get in touch with our friendly customer support team based out of La Crosse, WI.

Phone: 1-608-782-1610

Online: bit.ly/contact_techsupport

Our knowledgeable customer support team is available:

Monday-Friday, 8am-6pm CST.

JOIN THE CONVERSATION

Ask questions, watch detailed setup videos, and provide feedback on our social media outlets!



SPECIFICATIONS

Temperature Range: Up to 475°F (246°C)
Transmission Range: 400 feet (121.92 meters)

Transmission Interval: Every 3 minutes if no temperature change.

Immediate with 1.8°F (1°C) temperature change.

USDA MINIMUM COOKING TEMPERATURES

| Type of Meat Beef, Pork, Veal, & Lamb: | Minimum Internal Temps. 145 °F (62.8 °C) - Let rest 3 minutes |
|--|--|
| Ground Meats: | 160 °F (71.1 °C) |
| Ham-uncooked: | 145 °F (62.8 °C) - Let rest 3 minutes |
| All Poultry (whole, parts, ground and stuffing): | 165 °F (73.9 °C) |

Warranty

La Crosse Technology, Ltd. provides a 1-year limited time warranty (from date of purchase) on this product, relating to manufacturing defects in materials and workmanship.

Warranty: www.lacrossetechnology.com/pages/warranty

Patents: www.lacrossetechnology.com/patents

La Crosse Technology, Ltd. 2830 S. 26th Street La Crosse, Wisconsin 54601

Care & Maintenance:

- · Do not mix old and new batteries.
- · Always purchase the correct size and grade of batterymost suitable for intended use.
- · Ensure the batteries have with correct polarity (+/-).
- Promptly remove expired batteries.
- Do not mix Alkaline, Lithium, standard, or rechargeable batteries.
- Clean the battery contacts and also those of the device prior to battery installation.
- · Remove batteries from equipment that will not to be used for an extended period.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- —Reorient or relocate the receiving antenna.
- -Increase the separation between the equipment and receiver.
- —Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- -Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment and it also complies with Part 15 of the FCC RF Rules. This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provided with antenna installation instructions and consider removing the no-collocation statement.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation.

Caution!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

CA WARNING: This product can expose you to chemicals including acrylonitrile, butadiene, and styrene, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov