


6" Integrated Slim Light w/ Junction Box

Brighten your environment with the 6" Integrated Slim Light w/ Junction Box. The ultra-bright and ambient features offer various lighting preferences for your space. Select from five color temperature choices (2700K, 3000K, 4000K, 5000K, 6000K) that fit your desirable mood.

MODELS

DL_SLIJ6-14W-0K-12PK


LIGHT DISTRIBUTION ANGLE

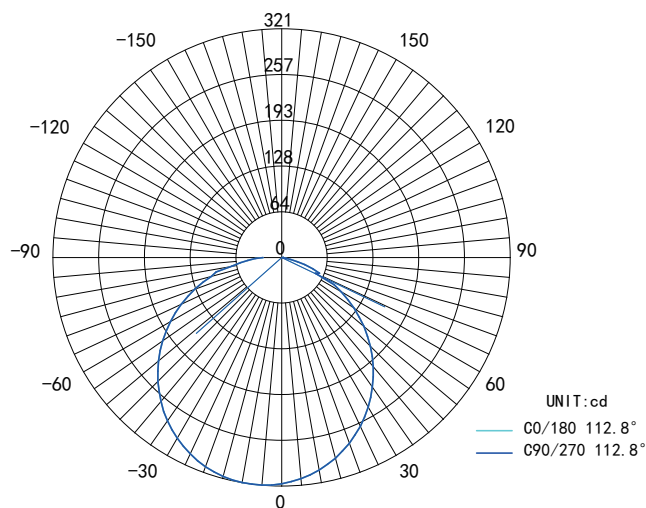

AVERAGE BEAM ANGLE (50%) : 112.8°

NOTE: The curves indicate the illuminated area and the average illumination at different distances.

CERTIFICATIONS

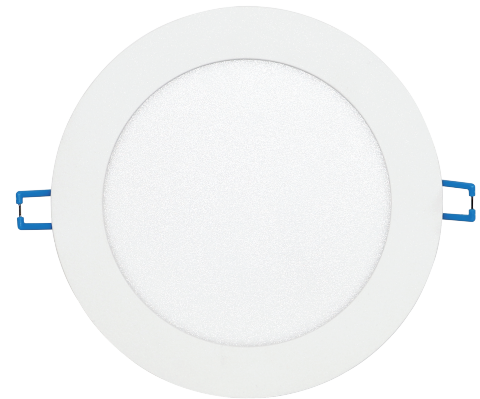

SPECIFICATIONS

Voltage	120V
Wattage	14w
Power Factor	0.8

LIGHTING PERFORMANCE

Lumens	850lm
Selectable CCT	2700K, 3000K, 4000K, 5000K, 6000K
CRI	80+
Beam Angle	90°
Dimmable	YES
Efficacy	60.72lm/w
Frequency	60HZ

ENVIRONMENT

Operating Temperature	-4°F-113°F
Moisture Rating	Damp

CONSTRUCTION

Housing Material	PLASTIC
Weight	0.53lbs

LIFETIME

Average Lifetime	LED 50000hours, Whole lamp 35000hours
Warranty	7 Years

6" Integrated Slim Light w/Junction Box

Brighten your environment with the 6" Integrated Slim Light w/ Junction Box. The ultra-bright and ambient features offer various lighting preferences for your space. Select from five color temperature choices (2700K, 3000K, 4000K, 5000K, 6000K) that fit your desirable mood.

BRAND	MODEL
LUTRON	DVCL-153PR-WH
LUTRON	CTCL-153PDH-WH
LUTRON	TGCL-153-PH-WH
LUTRON	MACL-153MH-WH
LUTRON	P-PKG1W-WH-R
LUTRON	AYCL-153P-WH
Leviton	R62-06674-POW
Leviton	P2-06672-1LW
Leviton	R50-IPL06-10M
Leviton	D26HD-2RW
Eaton	AL06-C1
Eaton	SAL06P-LA-K
Kasa Smart	HS220
Kasa Smart	HS220P3

We highly recommend using a ELV (electronic low voltage) dimmer compatible with LED lights. Buzzing or flickering is typically an indication that the dimmer and lights used are not compatible. Please consult dimmer manufacturer for maximum wattage capacity.

*May experience "pop-on" behavior, in which lights cannot be turned on immediately to their minimum level. To resolve this issue, first raise the slider switch above the minimum level to turn the lights on, then dim to a lower light level as needed.