




SAFETY | METAL ROOF ANCHORS

Metal Roof Swivel Anchor

Part No. 390RSA-01

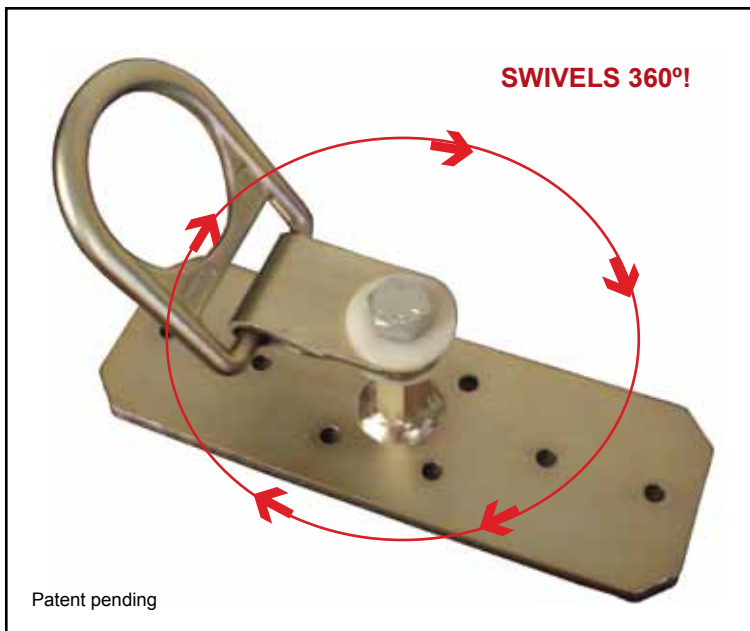

DESCRIPTION:

Continuous protection and freedom of movement with the 360° swivel and 180°+ movement of D-ring keeping the connection point in line with your work.

Elevated D-ring allows for continuous motion with less chance of wear on roof and catching on seams.

Compact design gives safe access to construction areas, roof maintenance, and HVAC/mechanical.

Designed to fit in the valleys **between** the hats on R Panel and standing seam roof and connect directly to the structural member below.

Connect your SRL, rope & rope grab, or lanyard directly to the D-ring.

Temporary or Permanent application. (Waterproofing by others — not by PSP.)

Removable and reusable! Uses readily available #14-14X1-1/2" self-drilling screws - included.

- Durable steel construction
- Drop forged D-ring
- Zinc Electroplate finish
- 5000 lb ultimate strength - 3600 lb max. load
- Meets or exceeds all applicable OSHA & ANSI requirements for anchorage devices
- Dimensions: 4" x 8"
- Weight: 2 lbs



Note and Warning:

Preferred Safety reserves the right to change and improve specifications design configurations, components and details at any time without notice. Check with Preferred Safety for any newer versions of products or instructions or warnings during the life of your product. The product is developed in accordance with OSHA and ANSI standards in effect at the time of manufacture. Users should remain aware of any changes in Safety and Health Laws or Standards in the Jurisdiction in which the user is operating and using Preferred Safety products.

Copyright ©2014 – Preferred Safety Products, Inc. All rights reserved. No copying or distribution of these materials are allowed for any purpose except for sales and management uses of our customers on jobs using the system described herein.