


2X2 LED CEILING PANEL

Installation Manual



INCLUDED HARDWARE

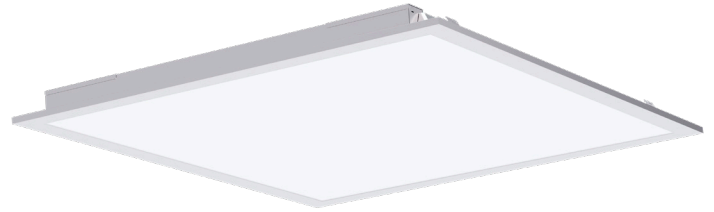

x5
Wire Nuts

EASY INSTALLATION RECESSED

	<ol style="list-style-type: none"> 1. Turn off switch and circuit breaker before installing this LED light fixture. 2. Turn ceiling panel face down on a flat surface. - Unscrew the (2) driver covers and set aside screws. 3. Pop out (2) knockouts (choice of 6). 		<ol style="list-style-type: none"> 4. Connect conduit to each knockout. - Pass wires through.
<p>N(white) L(black) ground wire (green)</p>	<ol style="list-style-type: none"> 5. Connect supply wires to ceiling panel wires with included wire nuts. - Black to Black (live); - White to White (neutral); - Green to Green (ground). 	<p>DIM-(pink) DIM+(purple)</p>	<ol style="list-style-type: none"> 6. (Optional) If using a dimmer (not included) connect DIM+ and DIM-wiring of ceiling panel to your dimmer with included wire nuts.
	<ol style="list-style-type: none"> 7. Replace driver covers. - Tighten screws firmly. 		<ol style="list-style-type: none"> 8. Locate (2) protective brackets on back of panel. Bend up 90°.
	<ol style="list-style-type: none"> 9. Twist brackets 90° so hooks face outside edge of ceiling panel 		<ol style="list-style-type: none"> 10. Install LED ceiling panel light in ceiling, using protective brackets. 11. Turn on circuit breaker and test light.

SPECIFICATIONS

Voltage	110-277 VAC
Wattage	40W
Moisture Rating	Damp Rated
Housing Material	SPCC+PC Lens
Weight	4lbs
Warranty	7 Years

WARNING

- To reduce the risk of fire, electric shock, or physical injury:**
- This product should be installed by a qualified electrician familiar with the construction and operation of the product and the hazards involved.
 - Check for shipping damage before installing. If the product is damaged, do not use it.
 - Always turn off the switch and circuit breaker before installing. Proper grounding is required to ensure safety.
 - This fixture is not suitable for wet environments. LED must be installed in an appropriate environment to work. Harsh environments may shorten the life or damage the light.
 - Clean the fixture regularly to ensure proper operation and efficient lighting. Do not clean with harsh solvents.
 - Use safety precautions and abide by regional and local laws or regulations.
 - Safety eyeglasses and gloves are recommended.

FCC NOTES

- This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 - Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.