
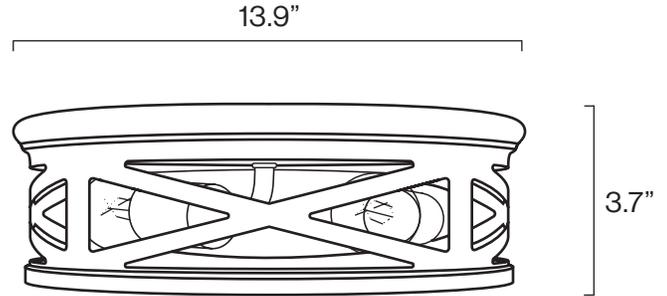


ARCADIA 4-BULB CEILING LIGHT

Installation Manual

COMPONENTS

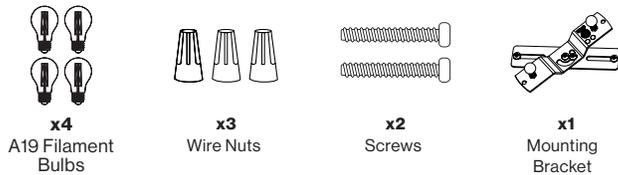


EASY INSTALLATION

Hardwire Installation with Bracket to Junction Box




Turn Power OFF


- Turn off circuit breaker that provides power to light switch.
- Run source wire from existing outlet to switch location, if needed.
- Install compatible junction box (not included.)
 - Slot distance for junction box should be 1.65" - 3.54" (42mm-90mm)




- Remove x2 ball nuts and their gaskets from mounting bracket.
- Using x2 provided screws, install mounting bracket onto junction box.




- Feed supply wires through junction box.
- Connect supply wires to fixture wires with included wire nuts.
 - Black to Black
 - White to White
 - Ground to Ground



- Tuck all wires into junction box.
- Attach ceiling fixture to mounting bracket with ball nuts and gaskets. Rotate fixture into place.



- Install x4 light bulbs with an E26 base.



- Turn on circuit breaker and test light.

WARNING

- To reduce the risk of fire, electric shock, or physical injury:**
- This product should be installed in accordance with regional and local laws or regulations by a person familiar with the construction and operation of the product and the hazards involved.
 - Check for shipping damage prior to install. If the product is damaged, do not use it.
 - Turn off the switch and circuit breaker before installing this light fixture.
 - Proper grounding is required to ensure safety.
 - This fixture is not suitable for wet environments.
 - Do not install directly over a heat source (stove, etc.).
 - This fixture should not be installed on a radiant heating ceiling or on the surface of combustible material, nor should this light be covered by flammable material.
 - Use safety precautions. Safety eyeglasses and gloves are recommended.

SPECIFICATIONS

Voltage	120V
Wattage	8.5W x 4
Housing Material	Steel
Weight	2.77 lbs
Warranty	5 Years

FCC NOTES (A19 FILAMENT BULBS)

- This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 - Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.