





## Gliding Split Strap for Cameras

The Gliding Camera Split Strap comes with everything you need to attach it to your C-Loop™. The strap is also compatible with the existing hardware from most sling systems.

Here is hardware that is included.

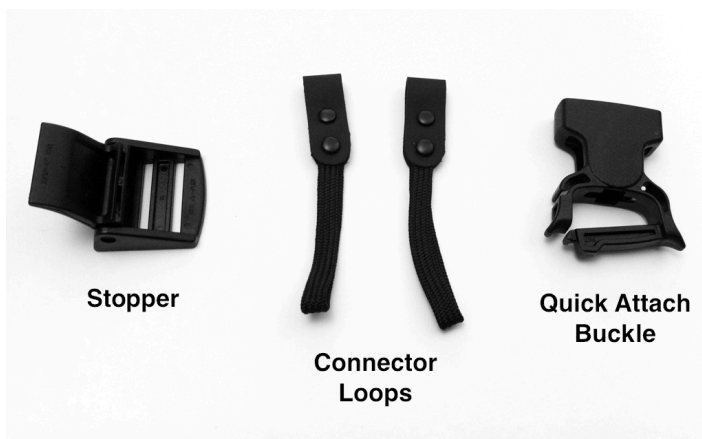


1. Attach both connector loops to the C-Loop™.

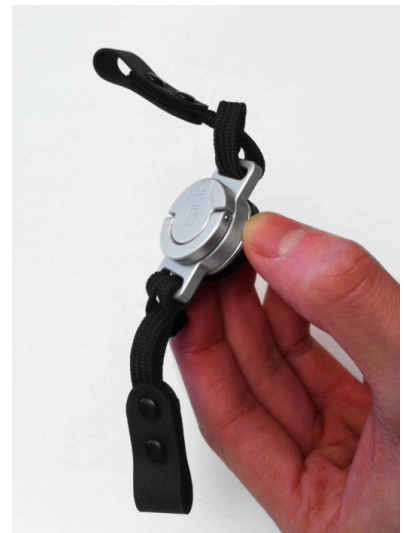



2. Slide the connector loops on to the quick attach buckle bar and press firmly to close.

Note: The quick attach buckle opens by pressing the bar down and pressing the end outwards.

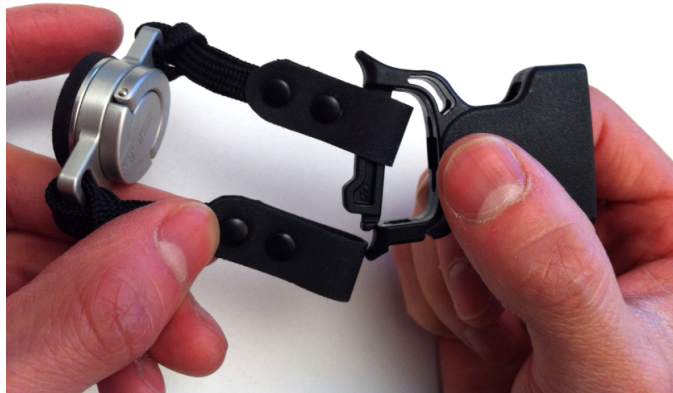


3. Mount the C-Loop™ on to your camera.





4. Adjust the length of the strap as needed. It may be necessary to cut the length of the webbing if it is too long. To do so use a pair of scissors and burn the ends with a flame to prevent fraying.
5. Attach the camera to the strap by snapping the connectors together.

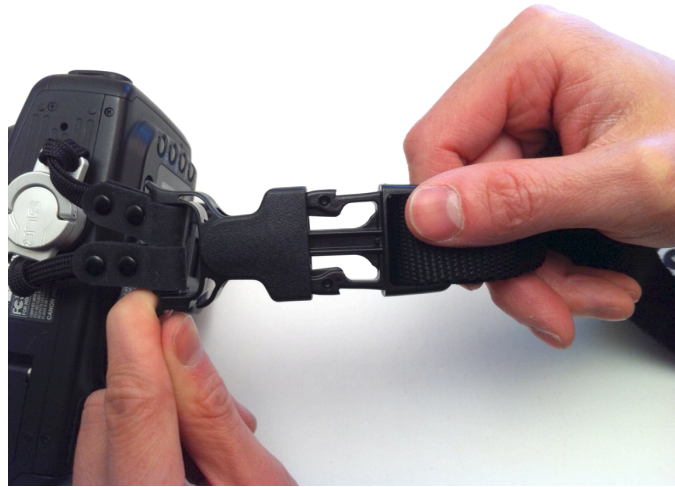

Adjust the travel of the camera by adjusting the stopper. The additional stopper can be installed to limit travel when leaning down or crouching.

Note: When reassembling the strap remember to insert the strap into the second bar of the male buckle.

