



Simplifying · Security

Doorbell Camera

Quick Start Guide

**SAVE THIS MANUAL FOR FUTURE REFERENCE**

## Quick Setup


Power Kit Installation

Doorbell Mounting

Doorbell Setup

# What's in the Box


EN



Doorbell (x1)

Faceplate (x3)

Pick the one that best matched your home from three faceplates.



Mounting Plate (x3)

Pick the one for best surveillance angle.



Screwdriver (x1)

Plate Foam (x1)

Stabilize the mounting plate when installing it in the rough surface.



Drill Bit (x1)



Power Kit (x1)



Wire Harness (x1)



Wire Connectors (x4)



Mounting Screws (x3)



Anchors (x3)



Fuse Wire (x1)



Security Screws (x2)



Fixing Screws (x2)



Mini-Level (x1)




U-shaped Wires (x2)



Doorbell Screws (x2)

## Tools You May Need



Drill





Pencil


# Power Kit Installation

- If you have the mechanical chime in your home, start from [Step 1](#) here.
- If you have the electronic chime in your home, please refer to its manual for detailed operations.
- If you do not have any chime, skip power kit installation and follow the [Option B](#) in page 5.


1 Shut off the electricity at the breaker that controls doorbell's circuit. 2 Insert one end of the wire harness the power kit.




3 Remove the cover from your mechanical chime.




4 Remove the existing chime wires in the terminals named TRANS and FRONT.



- 5 Connect the wire harness to the chime's terminals named REAR and FRONT.




- 6 Insert the existing chime wire and the other end of the wire harness into the wire connector and twist it tightly. Repeat this step with the other chime wire.




EN


## Wiring Overview

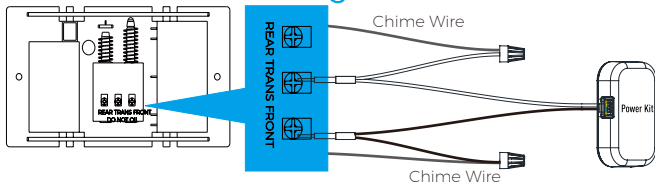

7. Mount the power kit to the side of the chime.




8. Put back the chime cover.




# Doorbell Mounting

1 Shut off the electricity at the breaker that controls doorbell's circuit.




2 (Optional) Paste the plate foam to the mounting plate.




**i** Use the plate foam when your wall is uneven.

3 Insert the mini-level into the mounting plate and mark the drill points when its bubble stays in the middle.




**i** Remove the mini-level when drill points are marked.

4 Drill holes according to drill points and insert anchors.




5 Fix the mounting plate to the wall.




6 If power kit is installed, follow **Option A**; If not, follow **Option B**.


**Option A** Connect doorbell with your existing doorbell wires.

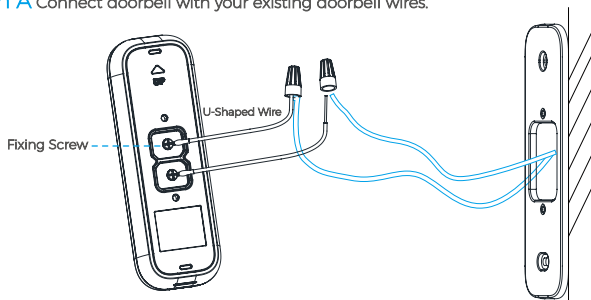


**Option B** Connect the fuse wire with your existing doorbell wire.

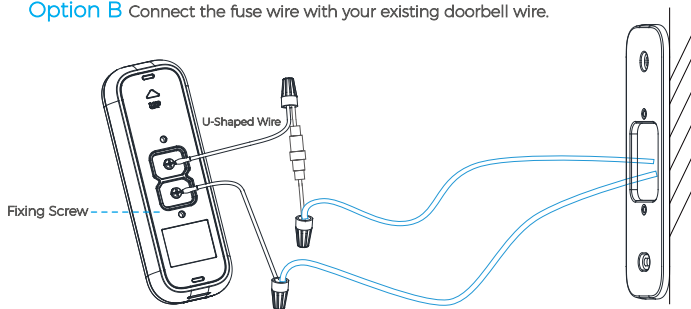

7 Fix the doorbell to the mounting plate by inserting the doorbell screws.



8 Restore the electricity at the breaker.




**i** Doorbell is powered on when its indicator flashes blue quickly. If not, make sure your electricity is off and check the wiring. If yes, proceed to doorbell setup.

## Doorbell Setup

9 Add to Alula app.

- Add a camera to the Alula app

- Log in to your account using the Alula app.
- From the Alula app Camera screen, tap "+" on the upper-right hand corner to go to the scan QR code interface.




- Scan the QR Code on the bottom of the camera.
- Enter the verification code located on the bottom of the camera.
- Follow the app wizard to finish Wi-Fi configuration.

**i** If you want to change your camera's Wi-Fi, press and hold the reset button for 10s and repeat this part.




10 Put the faceplate back and insert two security screws into the bottom of the doorbell to secure the faceplate.

EN




## Appendix

### Basics

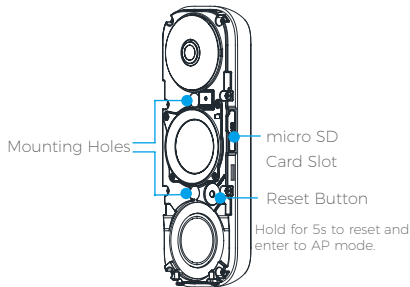

### SD Card Management

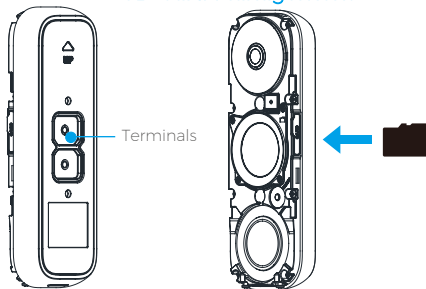

**i** If the memory card status displays as Uninitialized, tap to initialize it.

### LED Indicator

#### Blue Light

Flashing

Doorbell AP Mode is on.

Steady on

Doorbell is working.

#### Red Light

Flashing Fast

Device Exception

Steady on

Doorbell is powering on.