


Seri's Dollhouse Assembly Instructions

Parts

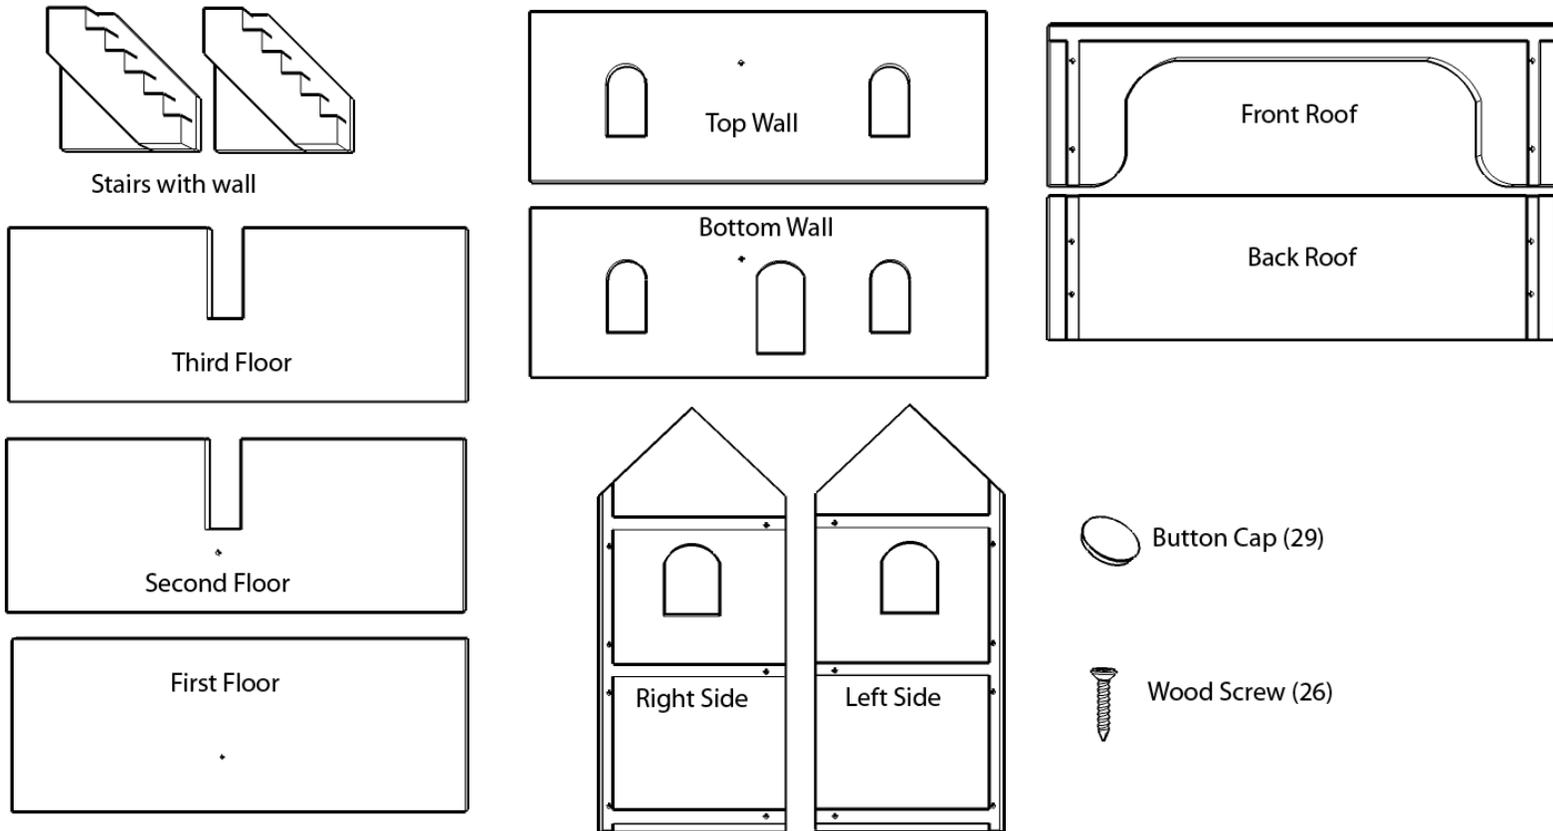


Pre-Assembly Information

- Start by familiarizing yourself with the parts above. This will make it easier to know how it all fits together.
- You will need Phillips Head Screwdriver and a few drops of glue for the button caps.
- It will be easier to install button caps on the back of the Stairs with walls before installing stairs.
- Locate a flat, level work surface, like a hardwood floor or a large table.
- Pine is a soft wood, so do not overtighten screws as you can strip out the material. This is less likely to happen with a screwdriver, so take care when using a drill or screw gun.
- Remember that this product is made of wood, a natural, living material. As such, humidity and dryness in the air can influence the product. Though it has been produced with the greatest care and precision possible you may experience minor variation in fit and finish.
- Read instructions completely before beginning so that you fully understand the process. It's easy and fun to do, but you'll feel more confident if you know what the next step is before you get there.


Caring for the Dollhouse

- The dollhouse is made of natural wood that has been finished with Tried & True Danish Oil, a polymerized linseed oil, which is food safe and non-toxic. To maintain the satin finish, we recommend reapplying this oil periodically, as you notice the wood drying out. Please visit <http://www.triedandtruewoodfinish.com> to find a retailer.
- Should the wood become discolored, we recommend cleaning it with Murphy's Oil Soap. If stubborn stains persist, use a fine green scrubbie (such as used on pots and pans) and rub lightly following the grain of the wood. Then apply a thin coat of the Danish Oil, according to the instructions provided.


Seri's Dollhouse Assembly

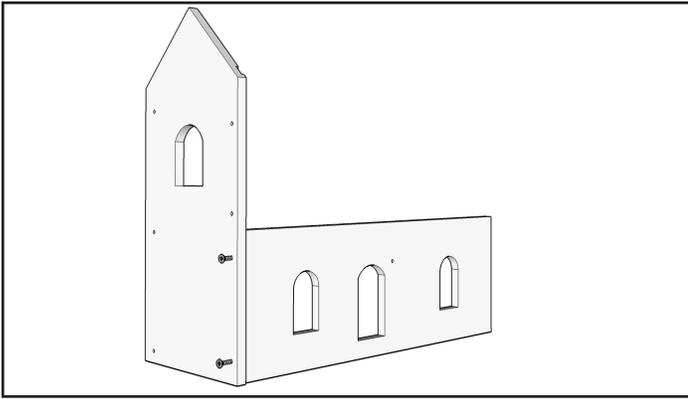


1. Insert Bottom Wall into slot in Right Side. Ensure larger pre drilled hole on wall faces out and drive two Wood Screws into Bottom Wall to secure it.

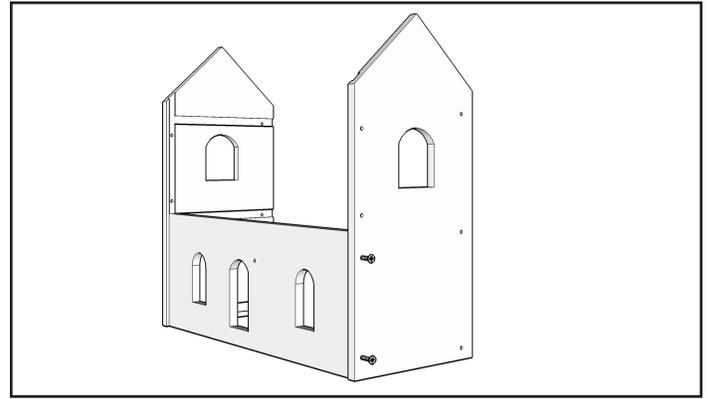


2. Insert Bottom Wall into slot in Left Side. Ensure that pieces are flush along bottom and drive two Wood Screws into Bottom Back to secure it.

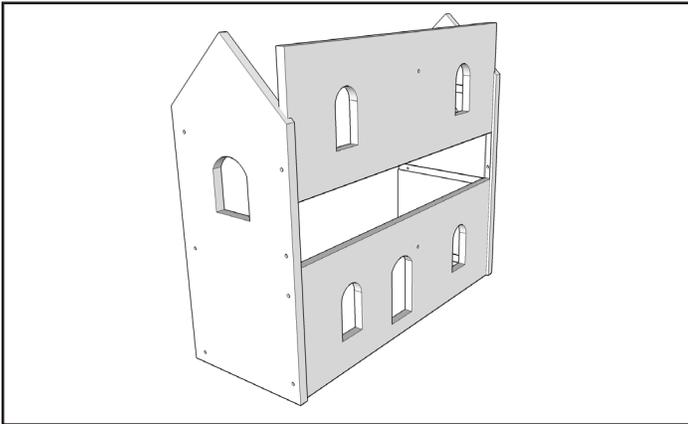


3. Slide Top Wall (larger pre-drilled hole out) into slots in Left and Right Sides. If you have trouble seating wall, back out bottom wall screws 1/4 turn.

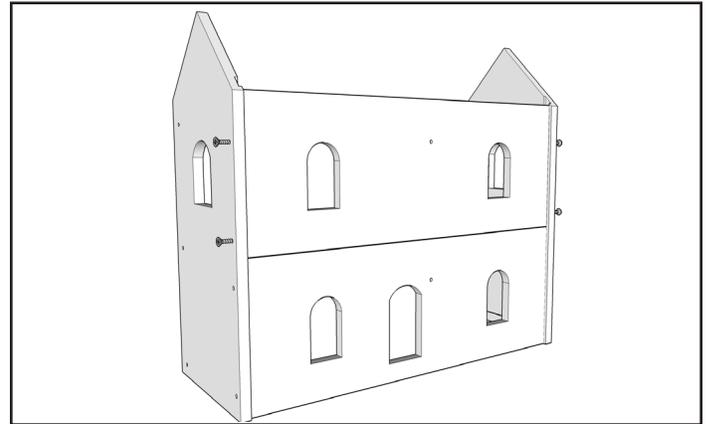


4. Drive Wood Screws into Top Wall through Left and Right Sides to secure it.

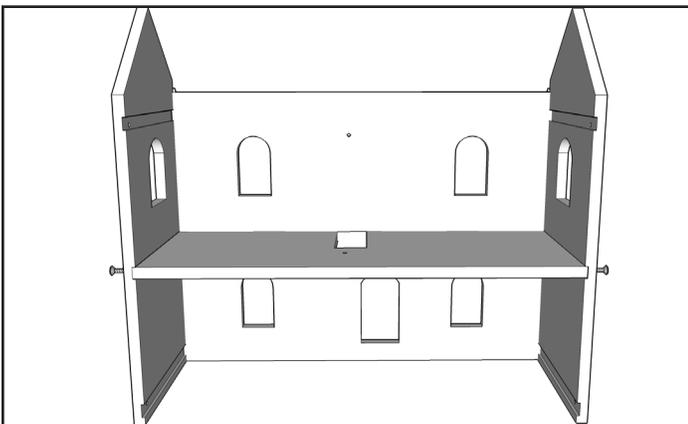


5. Slide Second Floor into slot in Left and Right Sides. Larger drill hole should be on bottom of floor. Secure with wood screws through left and right-sides.

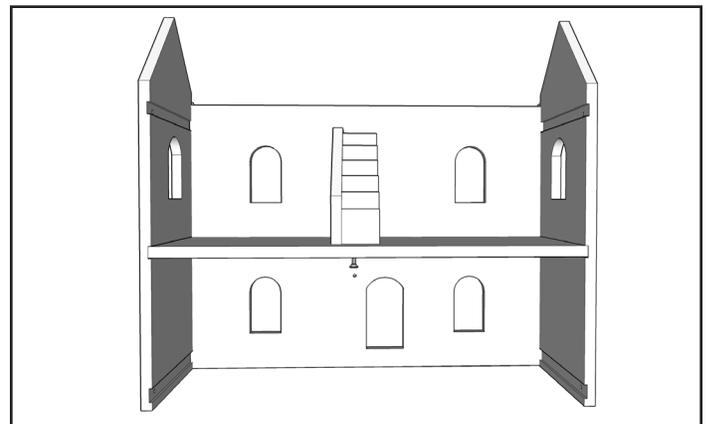


6. Position Stairs as shown with wall under stairs flush with left side of opening in Second Floor. Drive Wood Screw through Second Floor into Stairs with Wall as shown.

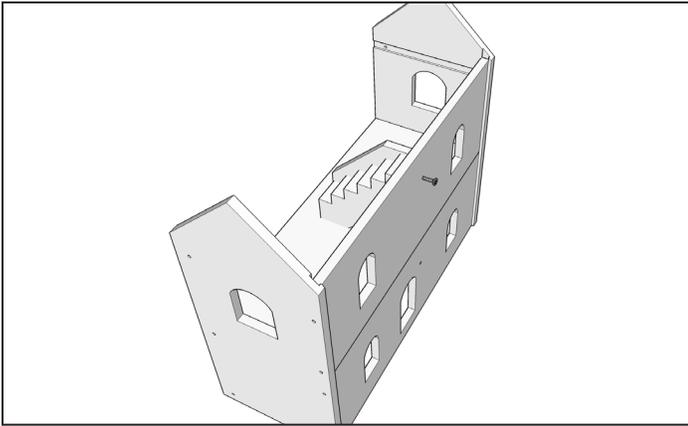


7. Drive Wood Screw through Stairs as shown.

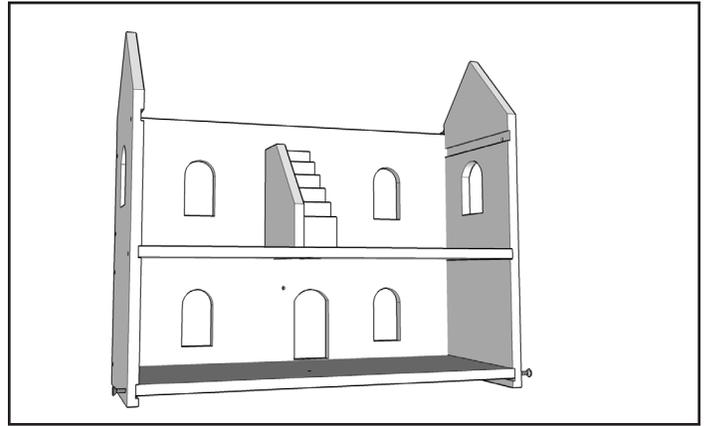


8. Slide First Floor into slot in Left and Right Sides, Larger hole facing down. Secure with wood screws.

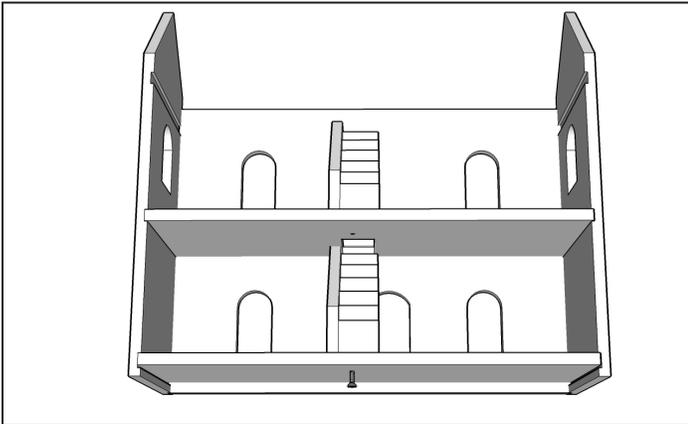


9. Position Stairs with as shown, lined up with Stairs with Wall above. Drive Wood Screw through First Floor into Stairs with Wall as shown.

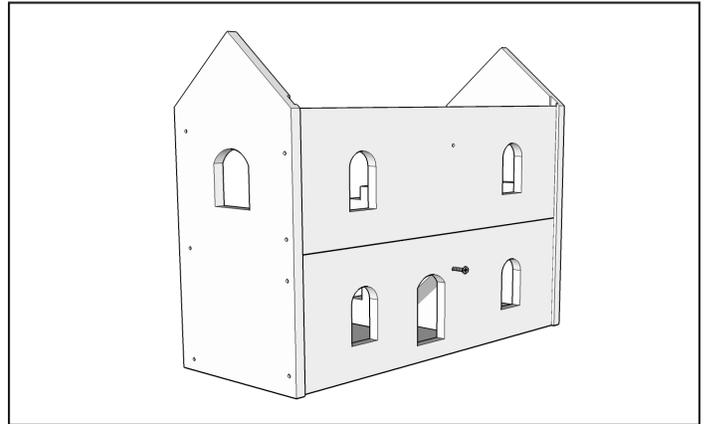


10. Drive Wood Screw through Stairs as shown.

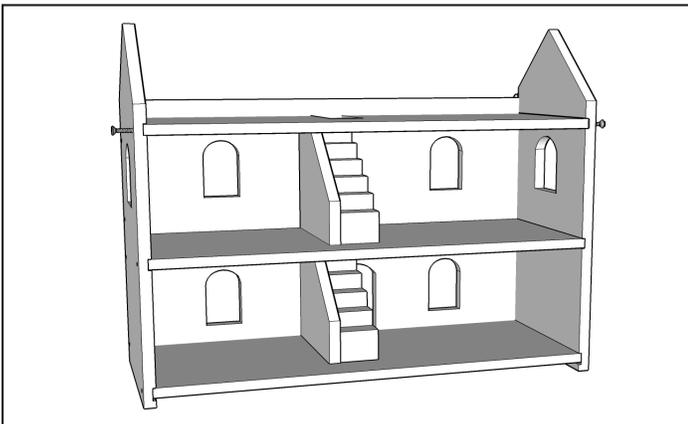


11. Slide Third Floor into slot in Left and Right Sides, with the off center stair cut out towards the left. Secure with wood screws

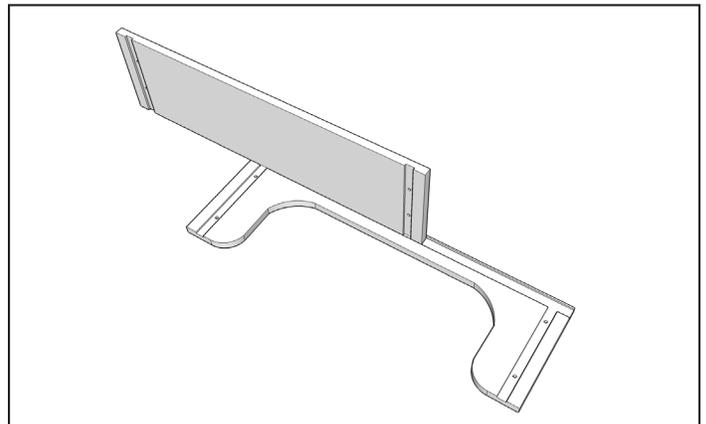

12. Slide flat edge of Back Roof in slot in Front Roof ensuring it is flush on both sides and that slots are aligned.

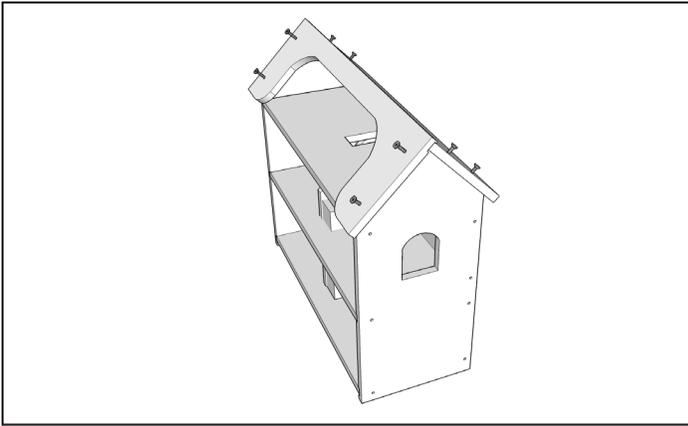

13. Install Roof as shown. Left and Right Sides will fit into slots in Roof. Drive Wood Screws as shown to secure roof.

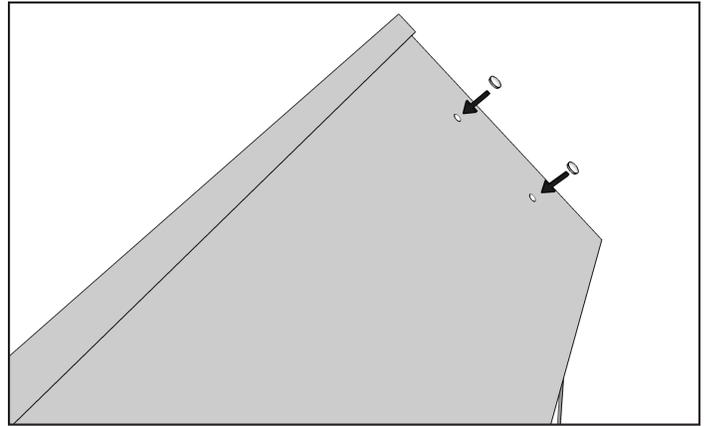

14. Insert Button Caps into screw holes with a drop of white glue. Wipe any excess with a damp cloth. A light tap with a hammer may help to fully seat the cap.

Congratulations on a Job Well Done!
We Hope You and Your Child Enjoy
Years of Play with Your
Seri's Dollhouse.

