




IMPORTANT INFORMATION

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

LED EMERGENCY BULKHEAD

Package Contents

Part	Description	Quantity
1	Emergency Bulkhead	1




SPECIFICATIONS

- Model: CR-BH3W
- Maintained or non-maintained
- Light Colour: Cool White (6000K)
- Battery: 3.6V Nickel Cadmium
- Input Voltage: 110V-240V
- IP Rating: IP65
- Emergency Duration: ≥3 Hours
- Wattage: 3W (30pcs SMD LED)
- Wall or Ceiling Mounted
- Warranty: 2 Years
- Dimension: 340(L)x115(W)x70(H)mm



SAVE THIS INSTRUCTION

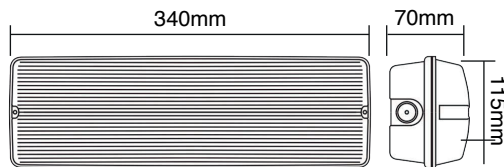

1. Review the diagrams thoroughly before installation.
2. Make sure all electrical connections are in accordance with the safety codes.
3. Turn off power at fuse or circuit breaker before installation or servicing.
4. Do not mount in hazardous locations, or near gas or electric heaters.
5. Make sure power cords are away from hot surfaces.
6. Unit should be mounted at a height and place where it cannot be tampered with by unauthorised personnel.
7. Do not use accessories/equipment not recommended by the manufacturer as this may cause or lead to unsafe use.
8. Do not use for any other application other than the recommended intended use.
9. All servicing should be performed by qualified personnel only.
10. Allow the battery to charge for 24 hours before first use.




53 Summer Lane, Birmingham, B19 3TH




Telephone: 01214398181 Email: sales@gws-led.co.uk
For more product information please visit our website www.gws-led.co.uk

MOUNTING INSTALLATION


Note: Turn off power from fuse or circuit breaker before installation.

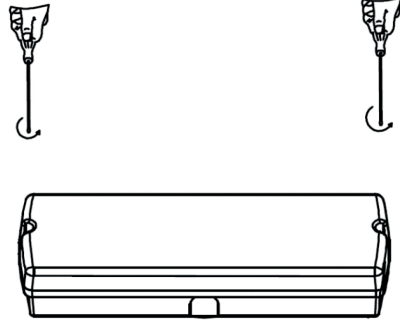


1. Unscrew from the back of the fixture.

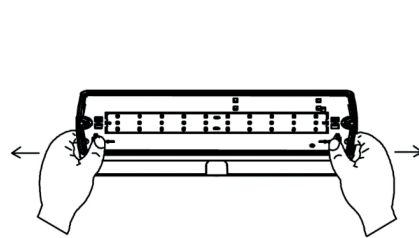

2. Push the buckle to open.

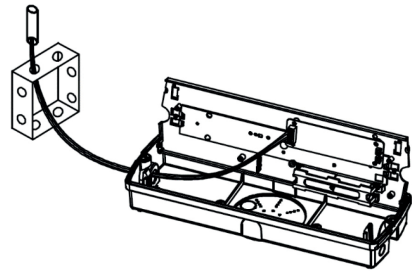

3. Electrical Connections.
Make the proper supply wire connections. Connect L and N to building utility. If using maintained working mode, keep L and SL jumper connected. If using the non-maintained working mode, disconnect L and SL and dispose of the jumper.

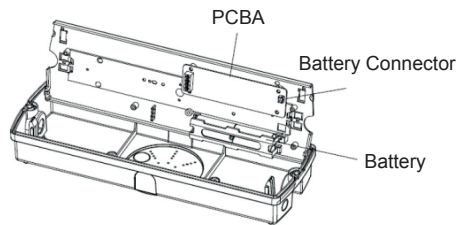

4. Connect the battery to the connector on the PCBA.
5. Assemble the fixture back together. Restore power and cut off again. LED will work with the backup battery in emergency mode. Restore power to complete the installation.

Luminaire Type/Ref:

Date of Installation:

Location:

Month	Test	1st year		2nd Year		3rd Year		4th Year		5th year	
		Sign	Date	Sign	Date	Sign	Date	Sign	Date	Sign	Date
1	Functional										
2	Functional										
3	Functional										
4	Functional										
5	Functional										
6	1 hour										
7	Functional										
8	Functional										
9	Functional										
10	Functional										
11	Functional										
12	3 Hour										