




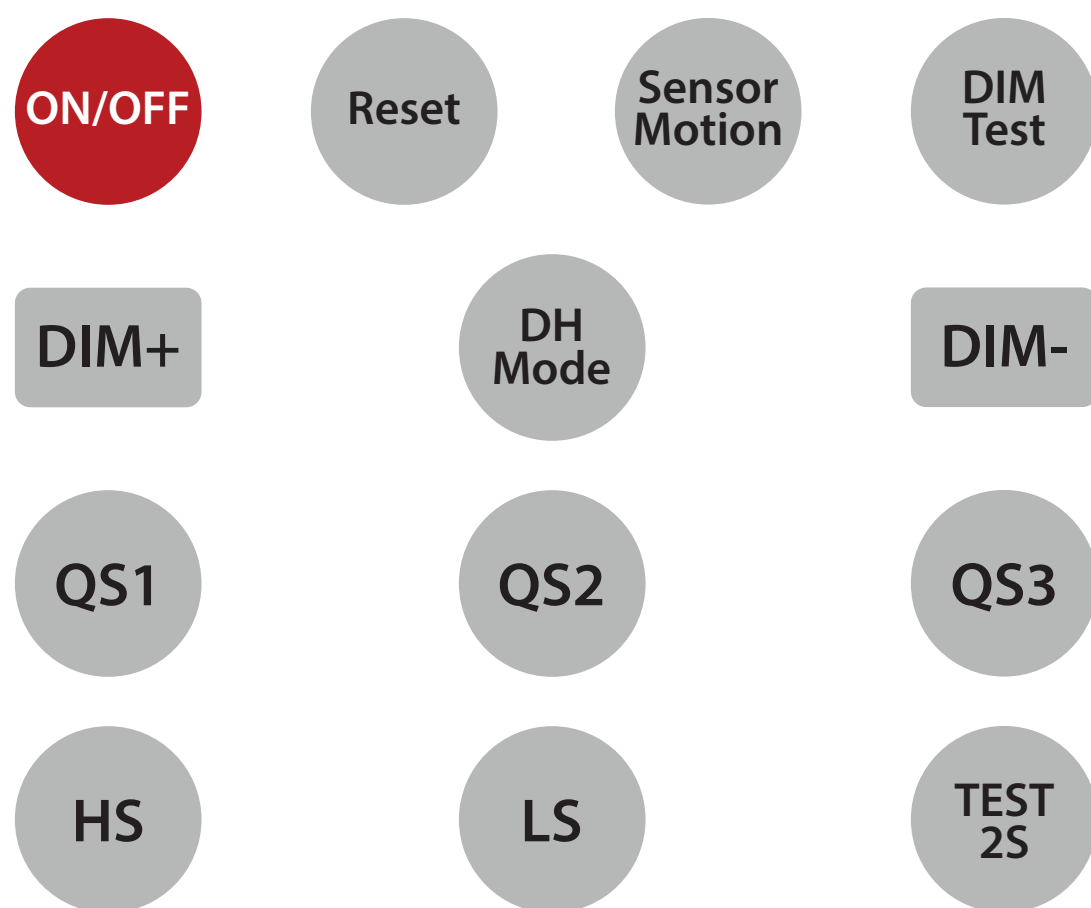
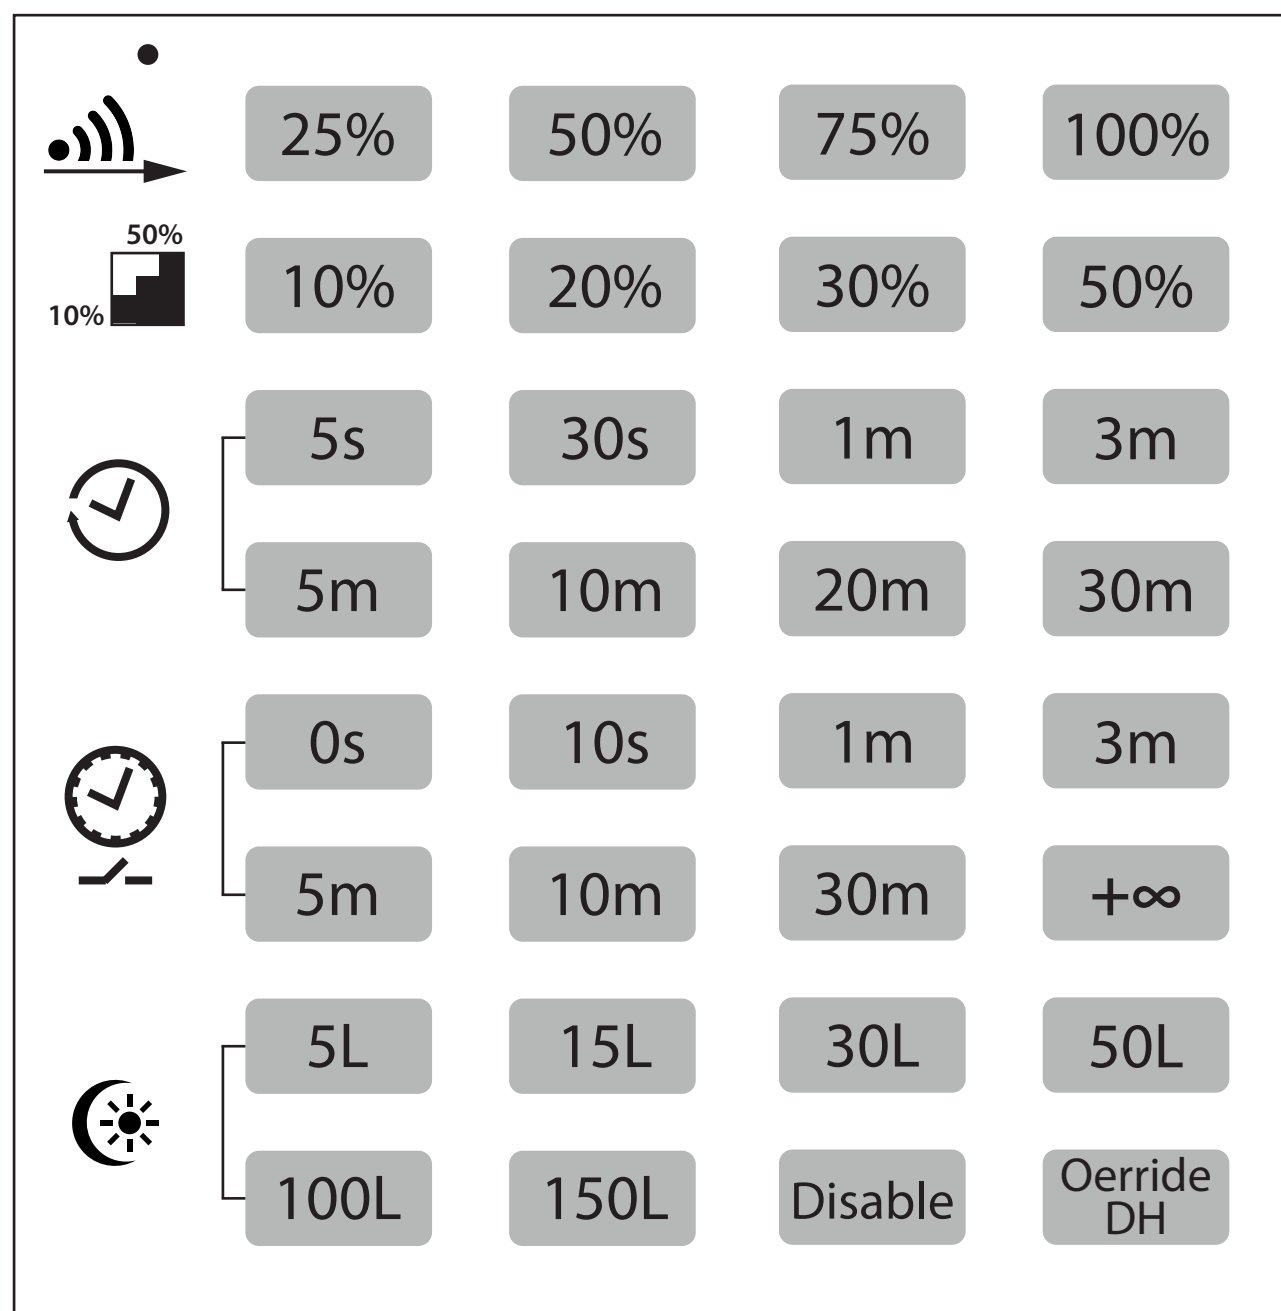


# Instruction

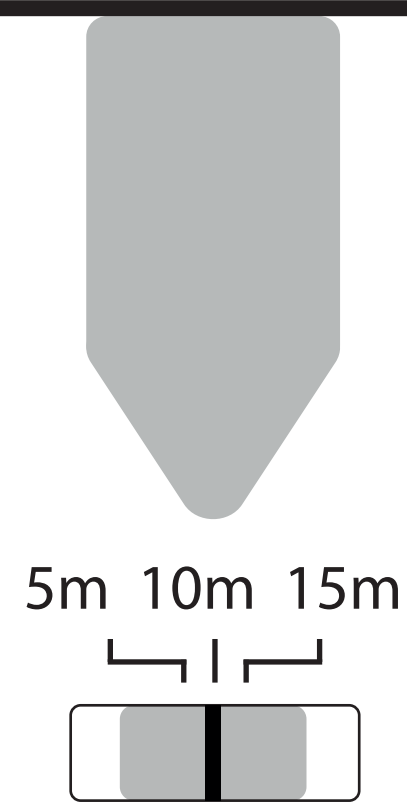

Press the "ON/OFF" button, the light goes to constant on/off mode, sensor is disabled. Press "Reset" "Auto Mode" button to quit from this mode and the sensor starts to work. No memory for ON-OFF setting after power off. Sensor mode will auto recover after restart power supply.

Press "Reset" button, all parameters are same as setting of DIP switch or factory settings.

Press "Sensor Motion" button, the light quits from the constant on/off mode, and the sensor starts to work (The latest setting stays in validity).

Press "DIM Test" button, the 1-10V dimming works to test whether the 1-10V DC dimming ports are connected properly. After 2s, it returns to the latest setting automatically.

Long press 3s, Daylight priority mode will be switched to daylight threshold mode, lux value will go back to previous one.

Short press "Dim+/Dim-" button to set the output lumen lever, each press will  $\pm 2\%$  light level.

Long press >3s, sensor will be switched to daylight priority mode, if preset daylight value is Disable, press DH Mode can not start daylight priority mode.

Scene Options	Detection Area	Hold Time	Stand-by Period	Stand-by Dim Level	Daylight Sensor	Induction Mode
QS1	100%	5min	10min	10%	30Lux	HS
QS2	100%	10min	30min	10%	Disable	HS
QS3	100%	20min	30min	10%	Disable	HS

Note: Detection area/Hold time/Stand-by period/Stand-by dim level/Daylight sensor can be adjusted by pressing the corresponding button. The latest setting will stay valid.

Press the "TEST 2S" button can enter the test mode any time. At the mode, the sensor parameters as below: Detection Area is 100%, Hold Time is 5s, Stand-by Dim Level is 10%, Stand-by Period is 0s, daylight sensor disable. This function only for testing. Quit the mode by pressing "Reset" or any other function buttons.

Press "HS" button to set the detection area to be high sensitive. Press "LS" button to set the detection area to be low sensitive. The adjustment bases on the "Detection Area" parameter you set.

Daylight Sensor  
Set up daylight threshold: 5Lux/15Lux/30Lux/100Lux/150Lux/Disable.

Stand-by Period  
Set up stand-by time: 0s/10s/1min/3min/5min/10min/30min/+∞.

Hold Time  
Set up hold time: 5s/30s/1min/3min/5min/10min/20min/30min.

Stand-by Dim Level  
Set up stand-by dim level: 10%/20%/30%/50%.

Detection Area  
Set up detection area: 25%/50%/75%/100%.

Remote Distance  
Toggle button can set the distance of remote control and sensor.