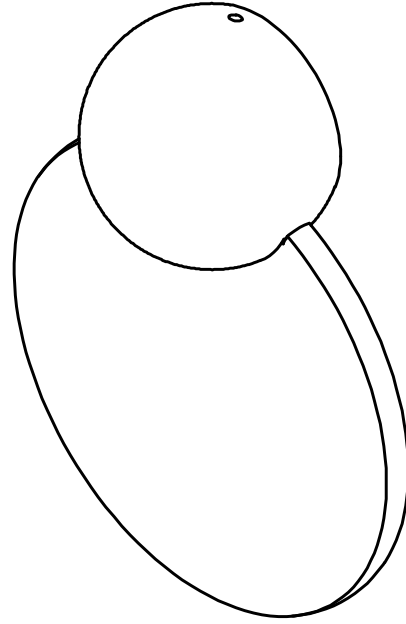


hollis+morris



**anchor
sconce**

product installation + specifications



anchor sconce

product code:
ACHRsconce

materials:

- + solid wood
- + frosted acrylic
- + 24V LED extrusion
- + metal

finish:

- + hardwax oil

input:

- + 120V 50/60 Hz (Canada + US)

driver:

- + 24V phase dimmable driver
- + driver included with canopy
- + 277 VAC- 0-10V dimmable driver available upon request

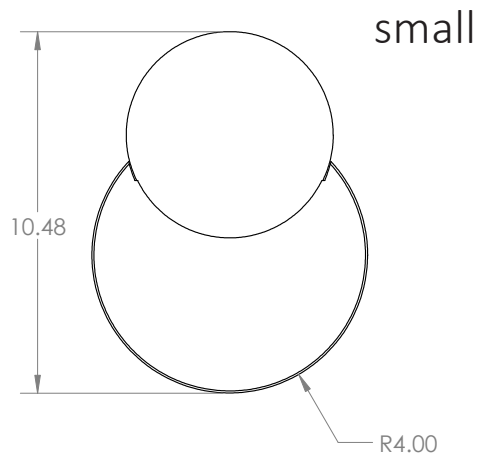
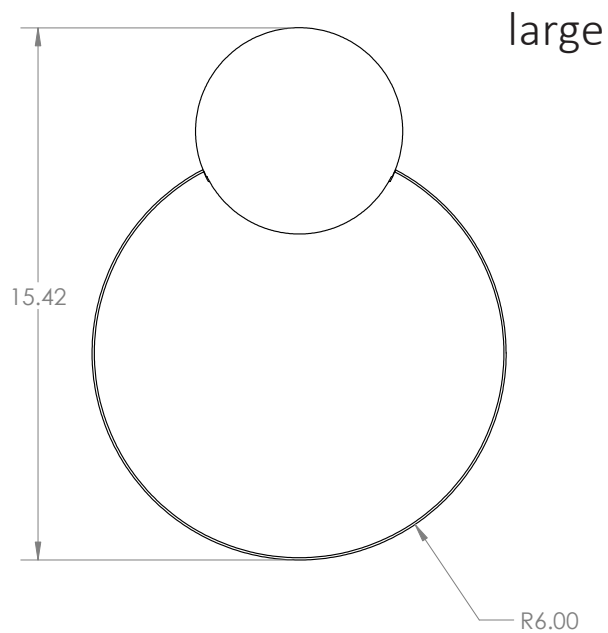
output:

- + 2W
- + 133 lumens
- + 3000K with CRI of 95 or higher






mounting

- + junction box connection

certification:



hardware component list

Component	Quantity	
Anchor Sconce	1	
8-32, 1" Flat Head Screw	2	
8-32, 1" Round Head Screw	2	
Universal Junction Plate	1	
B+L Driver	1	

hardware installation assembly

1. Locate desired mounting location on wall.
2. Remove the mounting bracket by loosening the set screw accessible at the top of the fixture. An allen key is required.
3. Insert the 8-32 flat head screws into the two holes of the mounting bracket, fasten the bracket to the universal mounting plate with said screws, and then refasten the bracket with the set screw.
4. Feed the coax cable through the universal junction box plate to connect with the driver as shown below.
5. Attach the driver to the junction box with the double-sided tape provided on the back.
6. Attach the universal junction box plate to the junction box, thereby mounting the fixture.
7. Have a certified electrician connect +/- leads of the driver to 120 V domestic power.

