092 Front Door Repair

This process works on 092, 00092, and 10092 houses only

I will use a repaired or replacement door; needle-nose plyers, forceps, or tweezers; and a box to support the house when I tip it back

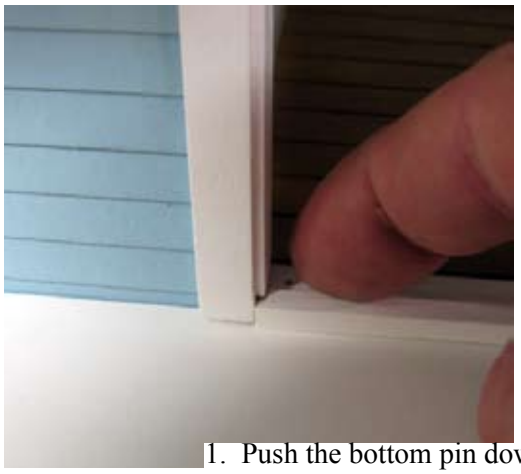

1. Push the bottom pin down until it hardly pokes up

The door has broken off its pins.
If you can find the broken-off piece, glue and tape it back to the door - otherwise a replacement door will be needed. There are pins left in the top and bottom door frame

2. Pull the top pin out and insert it into the top pin's hole in the door

3. Tip the house back onto the box so you have good access to the bottom

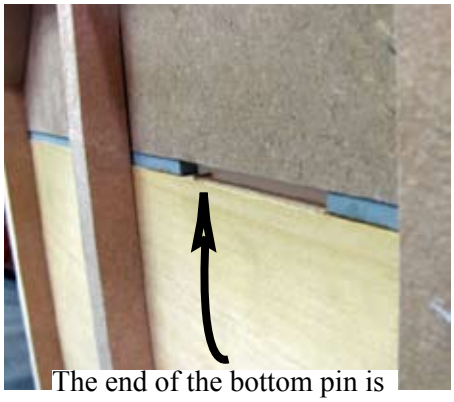

The end of the bottom pin is in the cutout for the door

092 Front Door Repair

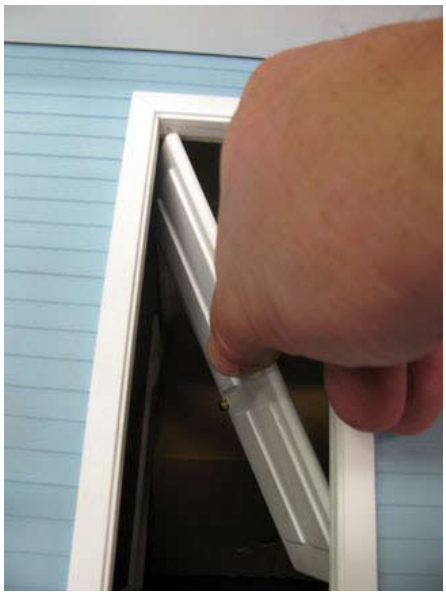

4. Tip the door within the opening (hold the bottom of the door to the inside of the Threshold)
Feed the top pin into the hole in the Frame

5. Straighten up the door. With the pin-hole in the bottom of the door over the bottom pin, push up very gently on the pin and move the door around... feel your way until the pin finds the hole

6. Still being very gentle, test the swing of the door to be sure you have found the hole. Push the pin the rest of the way in with your tool.

A piece of tape will keep the bottom pin from falling out.