


## Smart Wall Light Switch User Manual

- 1 -


### ► At a Glance

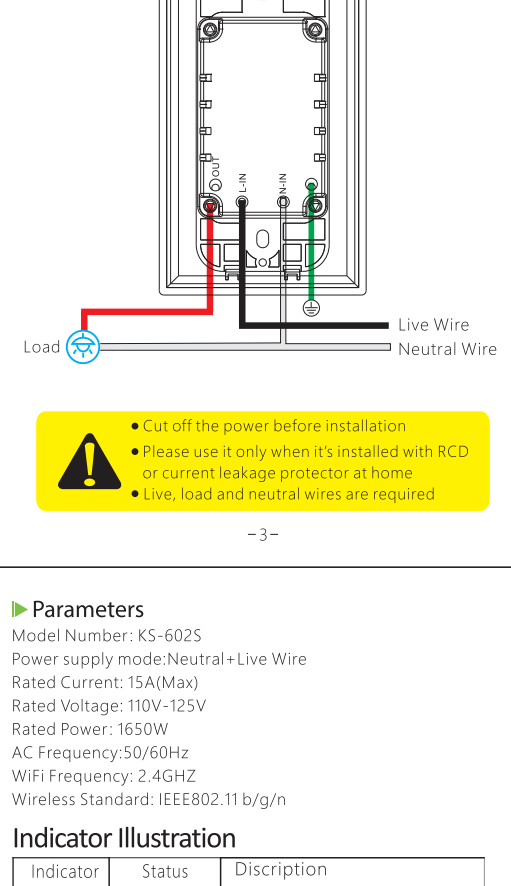

Note: ON/OFF BUTTON also can be used as reset button, long press to reset your smart switch to factory defaults. Only do this if you are sure you want to erase all your settings.

- 2 -

### ► Installation

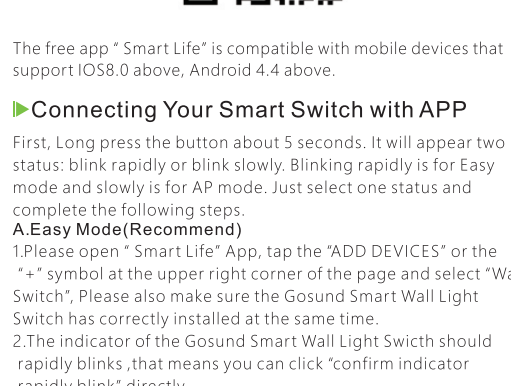

- Cut off the power before installation
- Please use it only when it's installed with RCD or current leakage protector at home
- Live, load and neutral wires are required

- 3 -

### ► Parameters

Model Number: KS-602S  
 Power supply mode: Neutral+Live Wire  
 Rated Current: 15A(Max)  
 Rated Voltage: 110V-125V  
 Rated Power: 1650W  
 AC Frequency: 50/60Hz  
 WiFi Frequency: 2.4GHZ  
 Wireless Standard: IEEE802.11 b/g/n


#### Indicator Illustration

Indicator	Status	Description
Green	Flash Rapidly	Ready for connection(Easy Mode Only)
Green	Flash Slowly	Ready for connection(AP Mode Only)
Green	Off	Turn the light off
Red	On	Turn the light on
Blue	Flash slowly	No Internet

### ► Install the " Smart Life" APP

1. Find out " Smart Life" app in Apple app store, Google Play, or scan the QR code below and install it.
2. Enter the register interface, input the email address / phone number for getting the verification code to register an account. Email address is recommended because email register doesn't need the verification code. Please just log in if you already have a Smart Life account.

- 4 -

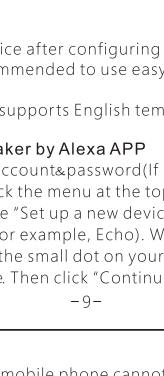

The free app " Smart Life" is compatible with mobile devices that support IOS8.0 above, Android 4.4 above.

### ► Connecting Your Smart Switch with APP

First, Long press the button about 5 seconds. It will appear two status: blink rapidly or blink slowly. Blinking rapidly is for Easy mode and slowly is for AP mode. Just select one status and complete the following steps.

#### A.Easy Mode(Recommend)

1. Please open " Smart Life" App, tap the "ADD DEVICES" or the "+" symbol at the upper right corner of the page and select "Wall Switch". Please also make sure the Gosund Smart Wall Light Switch has correctly installed at the same time.
2. The indicator of the Gosund Smart Wall Light Switch should rapidly blink, that means you can click "confirm indicator rapidly blink" directly.
3. Choose your home WIFI (make sure you the WIFI you choose same as the WIFI your phone connected and it's 2.4 Ghz instead of 5 Ghz) and enter correct password and confirm; 5 Ghz network or wrong password will cause connection Failed.


- 5 -


4. Wait for configuring successfully, then tap "Done". Only the blink frequency of indicator effect the connection, the color of indicator won't have any influence on connection, red indicator means the smart wall light switch in "turn on" status, green indicator means the smart wall light switch in "off" status.

#### B.AP Mode


1. Please change to "AP Mode" if connection failed in " Easy Mode". The AP Mode is at the upper right corner of the " ADD DEVICE" page.
2. If the indicator still rapidly blinks, hold a long press (5 seconds) on the button.
3. Make sure the indicator light slowly blinks and confirm it on APP.
4. Choose your home WIFI (make sure you the WIFI you choose same as the WIFI your phone connected and it's 2.4 Ghz instead of 5 Ghz) and enter correct password and confirm; 5 Ghz network or wrong password will cause connection Failed.
5. Tap " Connect Now", choose WIFI hot spot named " SmartLife xxx", then back to " Smart Life" app; Wait for configuring successfully, then tap " Done".

### ► Getting to Know "Smart Life" APP

By Clicking this , allows you to turn on/off your device anywhere. As long as you have an internet connection you can control the device in your home. Tap a small pen in the middle of the page, you are able to rename your device.

By Clicking this , Set timer / Add Schedule for smart switch; Have the device "lights" to turn on when you wake up or to automatically turn on when you get home.

- 6 -

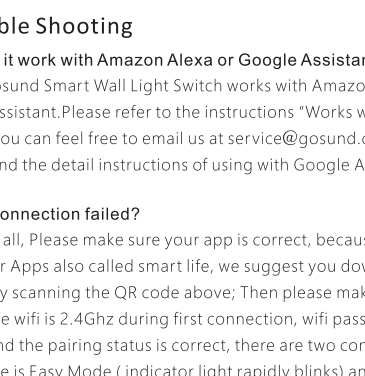


- 7 -

### Scenes

With this function, you can create your characteristic as you want.

### Profile

Profile is the entrance for the user to manage personal information, mainly show the following information.

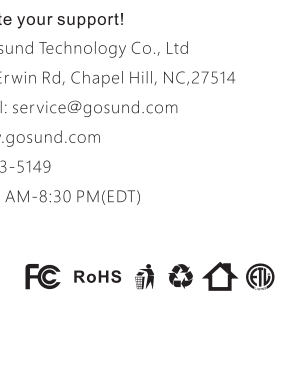

- 8 -

### ► Safety Information

Please cut off the power before installation.

Please use it only when it is installed with RCD or current leakage protector at home.

The device is recommended for the use indoors and in a dry location only. It should be used within its published rating specification on the instructions.

Please contact seller for replacement if there is any damage caused by transportation.

### ► Using Amazon Echo Quick Guide

#### What You'll Need...

Amazon Alexa APP&Account  
 Smart Life APP&Account  
 (User need to register your own account, select region as "The United States")  
 Echo, Echo Dot, Tap or other Amazon voice operated devices  
 Smart Life switch

Tip: Rename the device after configuring successfully. The name of the device is recommended to use easy pronunciation of the English words.

( Amazon Echo only supports English temporarily )

#### Set Your Echo Speaker by Alexa APP

1. Sign in with Alexa account&password(If not registered, sign up first); After login, click the menu at the top left, then click " Settings", and choose "Set up a new device";
2. Choose a device(for example, Echo). When the right page appears, long press the small dot on your Echo device until the lights turns to orange. Then click "Continue"on App.

- 9 -

( Note:at this time the mobile phone cannot open a variety of VPN software)



3. Choose user's WIFI and wait for a few minutes.
4. After an instruction video, click next step, it will turn to "Home" page automatically. Now the echo is connected to Alexa APP through WIFI successfully.

- 10 -

### Enable Our Skill in Alexa APP

1. Choose "Skills" in the option bar, and then search "Smart Life" in the search results, and then click "Enable".
2. Input the user name and password that you had previously registered (Only support the account in the United States); When you see the right page, it means the Alexa account is linked with Smart Life account.



- 11 -

### Control Smart Wall Light Switch by Voice

After the previous operation, you can control your light switch via Echo.

1. Discovering Devices: First user need to say to Echo: "Echo/ Alexa, Discover my devices."

Echo will start to find the devices which is added in Smart Life App, it will take up 20 seconds to show the result. Or you may click "Discover devices" in Alexa APP, it will show the devices that found successfully. Note: "Echo" is one of the wake-up name, which can be any of these three names (Settings): Alexa/Echo/Amazon.

2. Support Skill List

3. User can control devices by instructions as bellow:

Alexa, turn on (name of smart wall light switch)

Alexa, turn off (name of smart wall light switch)

Attention: The name of the device must be consistent with the addition of Smart Life APP.

- 12 -



- 13 -

### ► Trouble Shooting

#### Q: Does it work with Amazon Alexa or Google Assistant?

A: Yes, Gosund Smart Wall Light Switch works with Amazon Alexa and Google Assistant. Please refer to the instructions "Works with Alexa" part. Or you can feel free to email us at service@gosund.com and we will send the detail instructions of using with Google Assistant.

#### Q: Why connection failed?

A: First of all, Please make sure your app is correct, because there are similar Apps also called smart life, we suggest you download the app by scanning the QR code above; Then please make sure your home wifi is 2.4Ghz during first connection, wifi password is correct and the pairing status is correct, there are two connection mode, one is Easy Mode ( indicator light rapidly blinks) and another is AP Mode (indicator light slowly blinks).

#### Q: Does the smart switch compatible with 5Ghz?

A: Please choose 2.4Ghz Wifi channel during first connection, you can switch the wifi to 5Ghz after connecting successfully.

### ► Warranty

This Smart Wall Light Switch is covered by a limited warranty from gosund for the original purchaser that covers the product from defects in workmanship and materials for 12 months from the date of purchase/damages through normal wear and tear, alteration, misuse, neglect, accident, service by anyone other than the authorized service center, or act of God are not included)

- 14 -

### ► Contact us

For any inquiries or comments concerning our products, please do not hesitate to send an email to service@gosund.com, and we will respond you as soon as possible.

#### We appreciate your support!

Shenzhen Gosund Technology Co., Ltd  
 Address: 333 Erwin Rd, Chapel Hill, NC, 27514  
 Support Email: service@gosund.com  
 Website: www.gosund.com  
 Tel: +1-919-973-5149  
 Mon-Fri 10:30 AM-8:30 PM(EDT)



- 15 -