

Smartpack just got smarter!

- New and improved interface
- New and improved functionality
- Improved statistics
- Full hybrid support



Smartpack2

Distributed control system for medium to large power systems

Doc 242100.50X.DS3 - rev. 5

PRODUCT DESCRIPTION

New features and look on a well-tested control platform


Smartpack2 is built on the proven software platform that is used in Smartpack, making it reliable and robust. Increased program memory and new hardware allows for more features and improved user interface. The new modular distributed control system simplifies connections.

Power solutions

Eltek's power solutions are based on industry leading building blocks, fully integrated into coherent, complete and flexible solutions with one single Smartpack controller overlooking all energy sources, flow and storage. The entire installation is easily and efficiently monitored and controlled over the Internet by means of advanced, yet user friendly software.

Simplifies operation in large multisite systems

Smartpack2 offers many off-site benefits if it is connected to the internet. View the system status, change parameters and receive alarms at a multisite management center. Use features such as battery lifetime estimations, fuel consumption through tank level measurement and generator runtime, to plan for site service. Use the energy logs to document the amount of renewable energy used, and to plan for site upgrades.

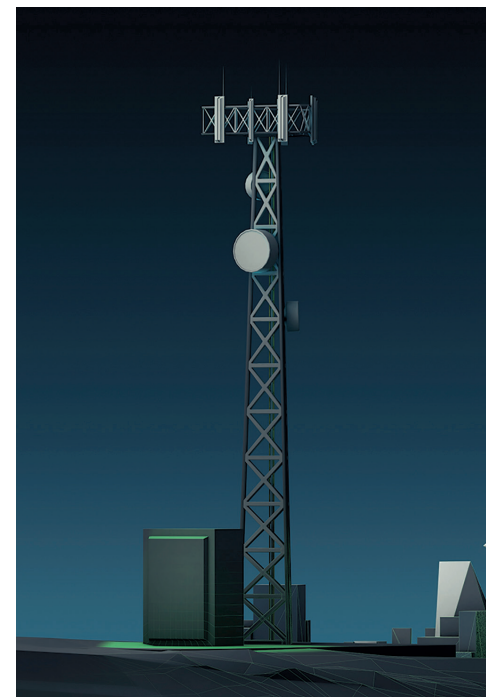

TELECOM

- Radio Base stations/ Cell Sites
- Mobile Switching Center (MSC)
- Microwave
- Central Office
- Cable
- Broadband

SYSTEM SOLUTION



INDUSTRIAL

- Power Utilities
- Railway & Metro
- Marine & Offshore
- Oil & Gas
- Low & High Voltage switchgear
- Transformer & SUB Stations
- Power Generation & Distribution
- Emergency lighting systems
- Industrial control systems
- Process and Heavy industry

SYSTEM SOLUTION



HYBRID

Smartpack2 comes with advanced software to control power systems with multiple power sources. It handles solar energy, generators, unstable grids and is prepared for wind power.

Suitable applications may include (but not exclude):

- Radio Base stations/ Cell Sites
- Mobile Switching Center (MSC)
- Microwave
- Central Office
- Cable
- Broadband

SYSTEM SOLUTION



DATA CENTER

- Distributed power solutions
- Central power solutions
- Front End/In-rack power

SYSTEM SOLUTION



DISTRIBUTED CONTROL SYSTEM


Three units are required to build a complete Smartpack2 control system.

- Smartpack2 Master is the master controller and visible part of the system.
- Smartpack2 Basic handles housekeeping.
- IO Monitor Type2 handles external inputs and outputs.
- The system can be expanded with several Basic, I/O units and other CAN nodes in the Smartpack family, all connected via the CAN bus.

KEY FEATURES

- **SCREEN**
High contrast, high resolution TFT color display for easy user-menu navigation
- **VISUAL LEDS FOR LOCAL ALARMS**
(Major, Minor, Power ON)
- **ETHERNET**
Monitoring and control via WEB Browser Ethernet port with HP Auto MDI/MDI-X for detection and correction for straight-through and crossover cables.
- **SNMP PROTOCOL**
TRAP, SET and GET on ethernet. Email of TRAP alarms
- **PROGRAMMABLE RELAY OUTPUTS**
6 programmable outputs for "traditional" remote monitoring. Expandable with I/O Monitor CAN Nodes.
- **PROGRAMMABLE MULTIPURPOSE INPUTS**
6 programmable multipurpose inputs ("digital inputs" or analog signals). Expandable with I/O Monitor CANNodes.
- **COMPREHENSIVE LOGGING**
- **BACKUP OF CRITICAL CONTROL FEATURES IN BASIC UNIT.**
- **AUTOMATIC BATTERY MONITORING AND TEST**
- **BATTERY LIFETIME INDICATION**
- **BATTERY USED AND REMAINING CAPACITY (AH OR %)**
- **MONITORING**
- **USER DEFINED ALARM GROUPING**
(boolean logic for grouped alarms)
- **UPLOADING AND DOWNLOADING OF CONFIGURATION FILES WITH SD CARD OR POWERSUITE**
(Windows™ application).
- **SD CARD SLOT FOR DOWNLOADING/UPLOADING OF LOGS AND SETUP**
- **COMPREHENSIVE GENERATOR/HYBRID/DC SOLAR SYSTEM CONTROL AND MONITORING FEATURES**

SYSTEM BUILDING BLOCKS

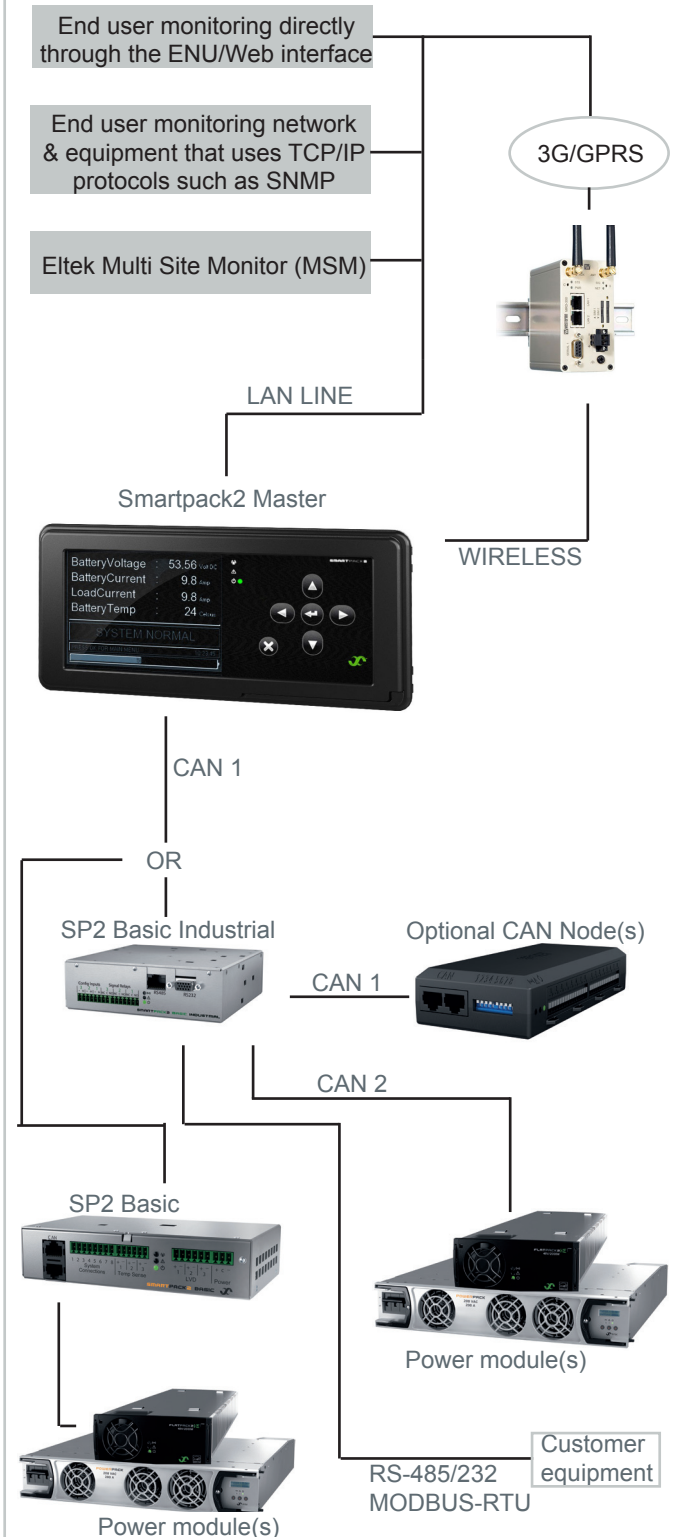

SMARTPACK2 WEB INTERFACE - REMOTE MONITORING AND CONTROL



REMOTE MONITORING



Through the internet or on-site directly from PC!

- System overview with status as “home page”.
- Graphs show changes over time of various system variables.
- Configure alarm limits and all other parameters through self explanatory symbols and menus.
- Security Protocols; SSL, Secure FTP server, FTPS with SSL/TLS.
- Download logs (event, energy, generator, battery,...)

LOCAL MONITORING

No PC? No problem!

The Smartpack2 high resolution display, allows the user easy access to complete configuration and status messages without the use of an on-site PC.

- Key system status parameters displayed by default: alarms, battery voltage, rectifier current and load current.
- Single key-hit to display list of triggered alarms.
- All configurations and setup available from the menus.
- High resolution and contrast – excellent reading and able to show complex content.
- Multilanguage (changeable “on the fly”): English, Chinese Simp., Chinese Trad., Russian, Norwegian and pending languages: Finnish, French, German, Greek, Italian, Polish, Portuguese, Spanish, Swedish and Turkish.
- Disable external alarms while servicing.
- Access control – pin code to change configuration

Setup data and logs – bring your SD card.

- Convenient storage – for backup and transportation.
- Easy and robust to roll out a set of systems with identical setup.

SMARTPACK2 MASTER

- 3.2" Graphical TFT, high resolution color display
- Ethernet for remote or local monitoring and control via responsive WEB Interface
- Front GUI fault finding in "One click"
- SD Card slot
- Multi language menu



SMARTPACK2 BASIC

- Located inside the system – only available to service personnel.
- Powers all control units attached to the CAN bus.
- Handles LVD control.
- Takes control of critical system function in case of a Master Controller failure.
- Short of CAN power or LVD control – add more Basic units



SMARTPACK2 BASIC INDUSTRIAL

- Full high-voltage range 110Vdc and 220Vdc
- Positive and floating distribution
- Earth fault detection
- Additional voltage measurements without adding CAN Nodes
- High(er) resolution current sense inputs for better accuracy
- Serial ports for special communication protocols
- Data center 380Vdc system compatible
- High capacity systems, up to 960 power modules



CAN NODES (OPTIONAL)

- AC Mains Voltage, current, frequency and energy consumption
- Battery symmetry, current and fuse monitoring
- Alarm outputs and control inputs
- Load branch current and fuse
- Climate control of fan/filter cabinets
- Generator control/fuel tank level measurements



CONTROL FEATURES

Control system	Battery	Rectifier	Generator
<ul style="list-style-type: none"> • Output Voltage Measurement • Load Current Calculation • Energy Calculation • Load/Battery Disconnect • Real Time Clock with Battery Backup • Stored Site Text/ID and Messages • Position (long/lat) for auto placement • Test of Relay Outputs • Alarm grouping of events for relay outputs 	<ul style="list-style-type: none"> • Battery Current Measurement • Battery Temperature Measurement • Battery Testing (acc. to discharge table or set time limit) • Setup of Battery Data/Table • Battery Capacity Indication • Battery Boost Charging <ul style="list-style-type: none"> -Auto – Ah discharge or voltage threshold -Interval or Manual • Temperature Compensated Charging • Charge Current Limitation • Battery Low Voltage Disconnect <ul style="list-style-type: none"> -Temperature dependent (optional) -Mains independent (optional) 	<ul style="list-style-type: none"> • Available information about each rectifier, e.g. serial number, version, internal temperature • Individual Rectifier Current Measurement • Individual Rectifier Input Voltage • Efficiency Management • Emergency Voltage • Startup delay • Detailed internal alarms summary • Current ramp control for Data Centers 	<ul style="list-style-type: none"> • On/Off control for cyclic charging and fuel reduction • Start-up delay of power system • Fuel consumption logging and alarming based on tank level measurement • Discharge cycle counter/Generator run hour logging • DoD [%] logging w/ time stamp • Generator On/Off based on battery voltage

ALARMS/EVENTS AVAILABLE

Power & control system	Load	Battery	Rectifier
<ul style="list-style-type: none"> • AC Mains Low (2-level) • AC Phase Voltage x3 (2-level) • “Digital” Inputs (programmable descriptions) • Events trigger by inputs <ul style="list-style-type: none"> - Service mode (block relays) -Generator running -Lower charge current limit -Battery test -Boost inhibit -Emergency low voltage -Clear manual re-set alarms. 	<ul style="list-style-type: none"> • Load Disconnect <ul style="list-style-type: none"> -Voltage or Timer (from mains failure) based -Mains independent (optional) • Load Fuse • Load Current 	<ul style="list-style-type: none"> • Battery Voltage (4-level, optional 8-level) • Battery Temperature (2-level) • Battery Used Capacity (2-level) [Ah or %] • Battery Remaining Capacity (2-level) [Ah or %] • Battery Fuse • Symmetry Failure (2-level) <ul style="list-style-type: none"> -Only with BM Can Node • Battery Quality after test (2-level) • Battery Current (4-level) • Battery Life Time (2-level) [from temperature log] 	<ul style="list-style-type: none"> • Rectifier Failure (2-level) • Rectifier Capacity (2-level) • Rectifier Current (2-level) • Rectifier Avg. Temperature (2-level) • Rectifier Current Share (2-level)

Note:

Alarms can be set up with monitoring of minor and major levels. Hysteresis and time delay is user configurable. All average and peak levels on analogue values are auto logged in Event log

SPECIFICATIONS

MASTER

Part number	242100.500
Power consumption	Max 4.5W
MTBF	> 1 300 000 hours Telcordia SR-332 Issue I, method III (a) (Tambient : 25°C)
Display	32k colour TFT – QVGA (320x240)
Ethernet port	<ul style="list-style-type: none"> • 10/100 BASE-T • HP Auto MDI/MDI-X
Removable media	SD card
SNMP	v1, v2c, v3 GET, SET & TRAP
Web	Webpower; XHTML 1, java script, SSL
Networking	SMTP Client and NTP Client, FTP, FTPS/TLS
Event log	10 500 time stamped events
Data log	10 000 time stamped values of 10 user defined monitoring points
Dimensions (WxHxD)	156 x 72 x 38 mm / 6,4 x 3 x 1,6"

BASIC

Part number	242100.501
Operating temperature	-20 to +70°C (-4 to 158°F)
Storage temperature	-40 to +85°C (-40 to 185°F)
Input voltage	20-172 VDC (20 -75 VDC***) Shutdown: < 18 VDC
Power consumption	Max 1.5A Max 4.5A (3x LVD max loaded)
Contactors outputs	3 x LVD control outputs
Configurable inputs	3x NO/NC/Temperature: NTC probe
System connections: <ul style="list-style-type: none"> • Voltage sense • Current sense • Battery fuse* • Load fuse* 	24V, 48V, 60V & 110V** systems 0-20mV and 0-60mV range shunts Battery fuse sense, Open/Closed Load fuse sense, Open/Closed, Pull- Up/Down, Diode Matrix
Ground fault	Simple bridge circuit detection
Max basic nodes	8 units on a single CAN-bus
Dimensions (WxHxD)	155 x 35 x 80 mm / 6.4 x 1.4 x 3.3"

BASIC INDUSTRIAL

Part number	242100.601
Operating temperature	-20 to +70°C (-4 to 158°F)
Storage temperature	-40 to +85°C (-40 to 185°F)
Power consumption	Max 1.6A
Electric isolation	7 different isolated sections
Customer connections: <ul style="list-style-type: none"> • Configurable Inputs 	3x, "digital", temperature / voltage /current measurements. - NO/NC, Pull Up/Dn, Diode Matrix: -10V> +10V (2mV full range) - Current measurements: 4-20mA (ext. sense resistor 100-500Ω) - Temperature measurements: NTC probe

Table continues on next page

Specifications are subject to change without prior notice

BASIC INDUSTRIAL - CONTINUED

• Relay outputs	3x, NO-C-NO, 0-220V, 30W (max. 1A), configurable
• Serial communication	RS232C port and RS485 port
System connections:	
• Voltage sense inputs	3x, Max. 420VDC, Symmetry& battery monitoring
• Current sense inputs	2x, for 20mV to 60mV current shunts
• Battery fuse sense inputs	1x, NO/NC, Pull Up/Dn, Diode Matrix: -10V> +10V (2mV full range)
• Load fuse sense inputs	1x, NO/NC, Pull Up/Dn, Diode Matrix: -10V> +10V (2mV full range)
• LVD contactor outputs	3x, 10-420V, 1A, Configurable as latching or non-latching LVD Supply input: 10-420V, 1A
• CAN interface	2 x, CAN bus systems (separated and isolated)
• Earth fault detection	1x, internal Isolation input
Power system compatibility	Industrial & Telecom, Positive, negative and floating DC distributions
Max number of controller nodes	10 on a single CAN-bus, in addition to Smartpack2 Master controller
Controller configuration	Front keys in the Smartpack2 Master controller, via CWUI in an standard web browser (Controller's Web-based User Interface) and via PowerSuite application
Dimensions	(WxHxD) 146.0 x 146.0 x 45.6 mm / (5.7 x 5.7 x 1.8")

I/O MONITOR (TYPE 2)

Configurable Inputs	6x NO/NC/Analog Voltage [0-75V]
Alarm Outputs	6x Relay–Dry/Form C [Max 75V/2A/60W]
Max I/O Monitors	14 units on a single CAN-bus
Power Consumption	Max 3.6W
Dimensions (WxHxD)	135.1 x 23.5 x 59mm / 5.3 x 0.9 x 2.3"

CONTROL DEVICES/CAN NODES

Part no:	Description
242100.300	Battery Monitor
242100.301	Load Monitor
242100.304	I/O Monitor (Outdoor)
242100.306	I/O Monitor Type 3
242100.200	Smartnode RS232/485
242100.500	Smartpack2 Master
242100.501	Smartpack2 Basic
242100.601	Smartpack2 Basic Industrial
242100.603	Fleximonitor
242100.502	I/O Monitor – Type 2

*Only Open/Closed for 110V **Basic ver. U1.3 ***Basic ver. 1.0 - 1.2

Specifications are subject to change without prior notice