

Portable Undercabinet

L9011/L9111



Assembly Instructions

www.advantus.com

904.482.0091

PLEASE READ THESE INSTRUCTIONS CAREFULLY AND SAVE THEM, AS YOU MAY NEED THEM AT A LATER DATE.

WARNING: Failure to install and wire fixture in accordance with the National Electrical Codes (NEC), all applicable Federal, State and Local electrical codes, as well as specific U.L. safety standards for the intended working environment (location/application), may cause serious personal injury, death and/or property damage. This product must be installed by a person familiar with the construction and operation of the product and the hazards involved.

CAUTION: TURN OFF POWER FROM THE MAIN CIRCUIT BEFORE INSTALLING FIXTURE. Make sure fixture is grounded per National Electrical Codes (NEC).

Important Note: The safeguards and Instructions appearing on this page are not meant to cover all possible conditions and situations that may occur. It may be understood that common sense, cautions and care, are factors which cannot be built into any product. The person(s) installing, operating and responsible for the light fixture must execute these factors.

WARNING: Risk of fire and electrical shock. Most dwellings built before 1985 have supply wires rated 60 degrees C. Consult a qualified electrician before installing.

If supply wires are located within 3 inches of the Ballast, use wires rated at least 90°C.

Tools required for installation:

1. Phillips screwdriver
2. Pliers
3. Hammer

CAUTION: To help prevent the possibility of electrical shock, the use of rubber sole shoes is recommended. Exercise care; use work gloves when handling the fixture to avoid cuts or abrasions.

BALLAST REPLACEMENT INSTRUCTION

1. Please read and follow all Warnings in this Instruction sheet.
2. Turn Power Off from the Main Circuit.
3. Remove cover in accordance with Installation instructions.
4. Place new Ballast next to the existing Ballast to ensure that the mounting locations are in the same place.
5. Remove the mounting hardware. Remove wirenuts that connect Ballast to lampholders by turning the wirenuts counter clockwise.
6. Mount the new Ballast utilizing the existing mounting hardware.
7. Follow the wiring diagram and installation instructions on the new Ballast and connect to lampholders using existing wire and wirenuts. Place the wires in wirenut and turning them clockwise until they are tight and secure. Confirm all wires are connected according to wiring diagram.
8. Turn power on to operate the unit.

PREPARING FOR INSTALLATION

1. Remove fixture from carton.
2. Remove the Diffuser by pulling back and up on the top edge of the diffuser using your fingertips.
3. Remove the bulb from the fixture by rotating it until the pins disengage from the sockets. Remove the cardboard support from the lamp if present.
4. To remove the included mounting hardware, pull back and up on the edge of the Ballast Cover so metal lip (Photo 1) becomes dislodged. Screws are located inside the Ballast Cover. (Photo 2) After removing hardware, push Ballast Cover back in place.

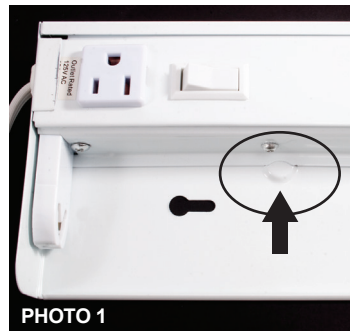


PHOTO 1

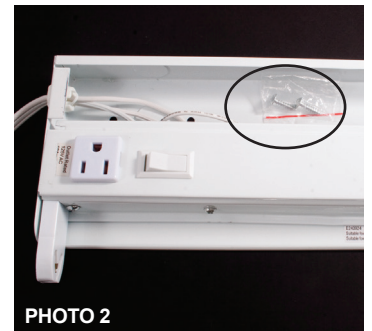


PHOTO 2

FIXTURE MOUNTING

1. To locate, hold channel up to the undercabinet surface in cations of the narrow end of the desired location. Mark the locations of the narrow end of keyholes on the undercabinet.
2. Take the channel down and drill a small pilot hole in the undercabinet at each location.
3. Install 1/2" wood screws into cabinet and leave approximately 1/8" gap.
CAUTION: Injury to persons and damage to the lamp and/or mounting surface may result if the lamp is pulled from the surface. To reduce the likelihood of such injury or damage, mount only to a surface that is structurally sound.
4. Place the channel flush against the undercabinet with the screws passing through the large ends of the keyholes, then slide it into the smaller slots.
5. Secure channel to the cabinet by tightening screws.
6. Reinstall lamp by inserting pins into lamp holder. Rotate 90° into place to seat lamp for proper connection.
7. Install plastic lens into the fixture.
8. Plug cord into receptacle.

