

# VOCOLINC

## PM2/PM2E

Smart Power Strip




## Product Overview:

PM2/E smart Wi-Fi power strip can be controlled through Wi-Fi wireless network. You can switch on/off each outlet and monitor its status wirelessly. The built-in power meter in outlet C(PM2 only) allows you to track power consumption of a specific light or appliance on the LinkWise APP.

1 x USB Type-A charging port supporting Qualcomm Quick Charge 3.0 (available with PM2 only);

2 x USB Type-A ports supporting DC5V, with total maximum current of 2.4A. USB ports are only for charging but not for data transmission or APP control.

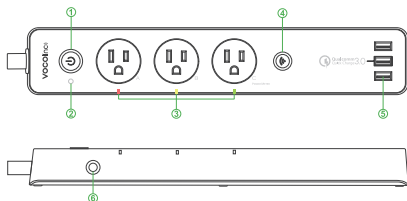

1	Main Power Button	Press to turn on/off power supply
2	Main Power LED	Indicates power supply status
3	Power Status LED	Indicates on/off status of each outlet
4	Reset Button/Wi-Fi Connection LED	Press once to switch 3 outlets on/off simultaneously/Press & hold for about 10 seconds to factory reset PM2/E. After reset, All connection data will be cleared and the device needs to be removed and added back to the app.
5	USB Ports	For charging only.To enable Quick Charge 3.0, the device being charged needs to support this function.
6	Overload Protection Switch	When current load hits the maximum capacity, it will trigger overload protection and cut off power supply. In this case, recover power supply by manually press the switch back in.

## Wi-Fi Connection LED Indicator Status

Indicator status	VOCOLinc PM2/E
Searching Wi-Fi	Blinks quickly
Adding a device	Blinks slowly
A device added Successfully	Blinks slowly 4 times then light on
Identifying a device	Blinks slowly 4 times
Connected to Wi-Fi	Light on
Disconnected from Wi-Fi	Light off
Reset	Press & hold for about 10s
OTA in Progress	Blinks slowly
OTA done	Blinks slowly then light on

### What's Included:

- PM2/E Smart Wi-Fi Power Strip
- User Manual

### Key Features:

- 3 independent smart outlets and LED indicators
- 2 x USB charging ports
- 1 x Qualcomm Quick Charge 3.0 USB port-(available with PM2 only)
- Energy monitoring (outlet C)-(available with PM2 only)
- Works with Apple HomeKit
- Works with Amazon Alexa
- Works with Google Assistant
- Can be applied to local or remote control of lights and home electronics
- Surge protection
- Dual overload protection

## Electrical Ratings

### 3 x Smart AC Outlets

Input: AC100~125V, 60Hz

Output: AC100~125V, 15A Max, 1800W Max (Pure Resistive Load)

### USB Ports

2 x USB DC 5V / 2.4A Max

1 x QC3.0 DC 5V / 3A, 9V / 2A, or 12V / 1.5A (PM2 only)

### General use ONLY

Indoor dry location use ONLY

## Safety Warnings

- Plug directly into electric outlet (not into extension cord)
- For indoor use only
- Unplug PM2/E from outlet before cleaning
- DO NOT clean with liquid
- DO NOT remove ground pin (middle pin) as there is risk of electric shock
- DO NOT use in wet or damp areas
- Keep children away from PM2/E
- DO NOT exceed recommended electrical ratings
- DO NOT use in precision timing applications where inaccurate timing could be dangerous (sunlamps, saunas, etc.)
- DO NOT use with devices that should not be operated unattended.
- After switching off the the main power, DO NOT operate until the main power indicator goes completely off (about 2 seconds delay)
- DO NOT use the device when the casing is broken



VOCOLinc APP



Setup code  
Code de Configuration