


CAT6 Joiner / Coupler

Data Sheet - CONN66B

PRODUCT OUTLINE DRAWING

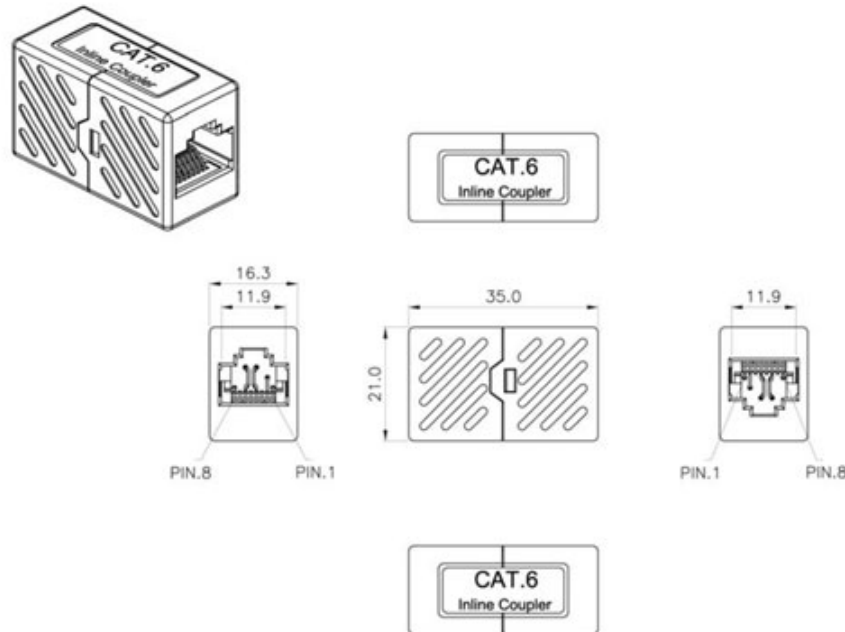

MATERIALS

Item.	Material
Plastic Housing	ABS + PC, UL 94V-0
8P8C Jack	Housing: Polycarbonate, , UL 94V-HB, Transparent color
	Phosphor Bronze with 50-60 micro-inch Nickel plating
	Contacts are 50 micro-inch Gold Plated
	Minimum 3mm Contact Area

SPECIFICATIONS

Item	Standard
Insertion Force	900 grams for 8 contacts
Retention Strength	7.7kgs between jack and plug
Operating Temperature	-40°C to +80°C
Durability	750 cycles Plug-Jack mating and un-mating test. Insertion cycles at 20 cycles/minute maximum. Contact resistance test per 100 cycles.
Performance	The Cat.6 performance is in compliance with the ANSI/TIA/EIA 568 B.2-1 standard.



03 9725 1911



sales@dueltek.com.au



03 9725 1126



Unit 2, 35-43 Lacey St. Croydon
Victoria 3136 Australia



www.dueltek.com.au

Copyright © 2012 Dueltek

Dueltek Computer Products, Dueltek Distribution and its logos are registered trademarks of Dueltek Pty. Ltd. All Rights Reserved.