





ADSL In-Line Micro Filter

Instruction Sheet - Part #: K2310

ADSL (Asymmetric Digital Subscriber Line) is a service that uses your existing telephone line to provide a broadband service that allows the telephone line and a high speed Internet connection to be used simultaneously.

ADSL In-line Micro Filter

An ADSL in-line micro filter separates the telephone service from the ADSL data. Without ADSL in-line micro filters, your voice calls will receive interference when ADSL data is being transmitted. One ADSL in-line micro filter is required between each telephone device and the telephone wall outlet. This includes fax machines, fax/modems, answering machines, cordless phones and alarm dialers.


ADSL In-line Micro Filter Installation

For each device that shares the ADSL phone number.

- 1. Unplug the device's cord from the wall socket.
- If you have a modular RJ11/RJ45 telephone wall socket, connect the ADSL in-line micro filter plug directly
 into the RJ11/RJ45 telephone socket on the wall. If you have the older "610 Telstra Socket" on the wall, a
 606M adaptor will be required to convert the RJ11 plug.
- 3. Plug the phone cord (or other device cord) into the PHONE socket on the ADSL in-line micro filter.

ADSL Modem/Router Installation

Unless your ADSL Modem/Router has been supplied with a combined SPLITTER/FILTER, it must be connected directly to the telephone line without an ADSL in-line micro filter. Please refer to instructions supplied with the ADSL Modem/Router and/or your ADSL service provider.

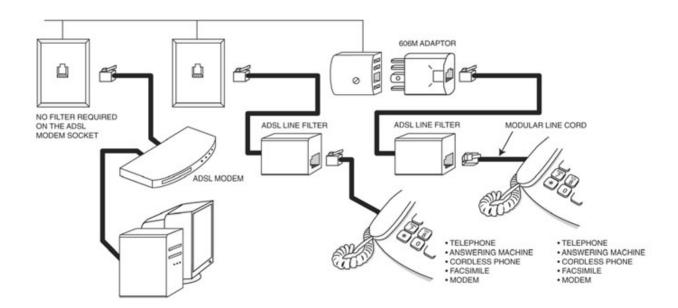



03 9725 1911



sales@dueltek.com.au



03 9725 1126



Unit 2, 35-43 Lacey St. Croydon Victoria 3136 Australia



www.dueltek.com.au