







50/125 (OM4) Optical Fibre Patchcords

Description

Multimode patch cords are used to connect high speed and legacy networks like Gigabit Ethernet, Fast Ethernet and Ethernet. Our multimode patch cords are manufactured using LSZH cables which conform to IEC, EIA TIA and Telecordia standards. The OM4 patch cords are terminated with our standard connector which gives optimum optical performance.

Features / Benefits

- SC, LC, ST and MTRJ connectors
- Low smoke zero halogen (LSZH) cable in aqua colour or erika violet
- 900µm tight buffer
- OM4 fibre conforms to ITU-T G.651.1, TIA/EIA 492AAAB, IEC60793-2-10
- Simplex and duplex assemblies
- ► Duplex assemblies available with clips (SC and LC)
- ▶ Different connector performance range for specific application

Applications

- For use in 10 Gb/s high speed LAN networks over a 400m indicative link length at 850 nm (SX) wavelength using a laser launch
- ► For use in 1 Gb/s high speed LAN networks over a 2000 m indicative link length at 850 nm (SX) wavelength using a laser launch
- High speed and legacy networks including Gigabit Ethernet, Fast Ethernet and Ethernet
- Data centers
- Premises cabling in data networks including backbone, riser and horizontal
- Supports video, data and voice services

Connector Specification


OPTICAL PERFORMANCE	MULTIMODE	CONFORMANCE
IL Max/Master (Acceptance)	0.25 dB	IEC 61300-3-4
Ave/Master*	0.15 dB	IEC 61300-3-4
Ave/Random*	0.20 dB	IEC 61300-3-34


Fibre Specification


CHARACTERISTICS	
Attenuation (dB)	2.8 @ 850nm / 0.8 @ 1310nm
Bandwidth OFL (MHz x km)	3500 @ 850nm / 500 @ 1310nm

Cable Specification

Characteristics	Simplex	Duplex	
Cable Material	LSZH	LSZH	
Strength Member	Aramid	Aramid	
Crush (N)	1000	1000	
Operating Temperature (°C)	-20 to 60	-20 to 60	
Fire Specification	IEC 60332-1 / IEC 60332-3		

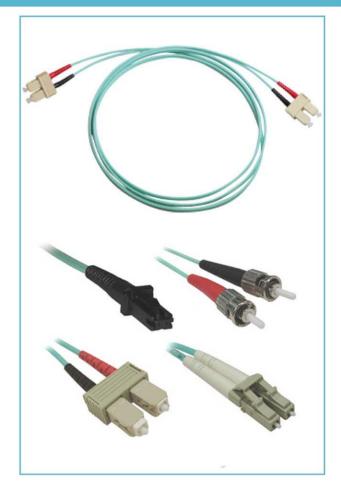







03 9725 1911



sales@dueltek.com.au



03 9725 1126



Unit 2, 35-43 Lacey St. Croydon Victoria 3136 Australia



www.dueltek.com.au