


400W 12V COMPLETE SOLAR KIT

MEGA 200W 12V SOLAR PANELS

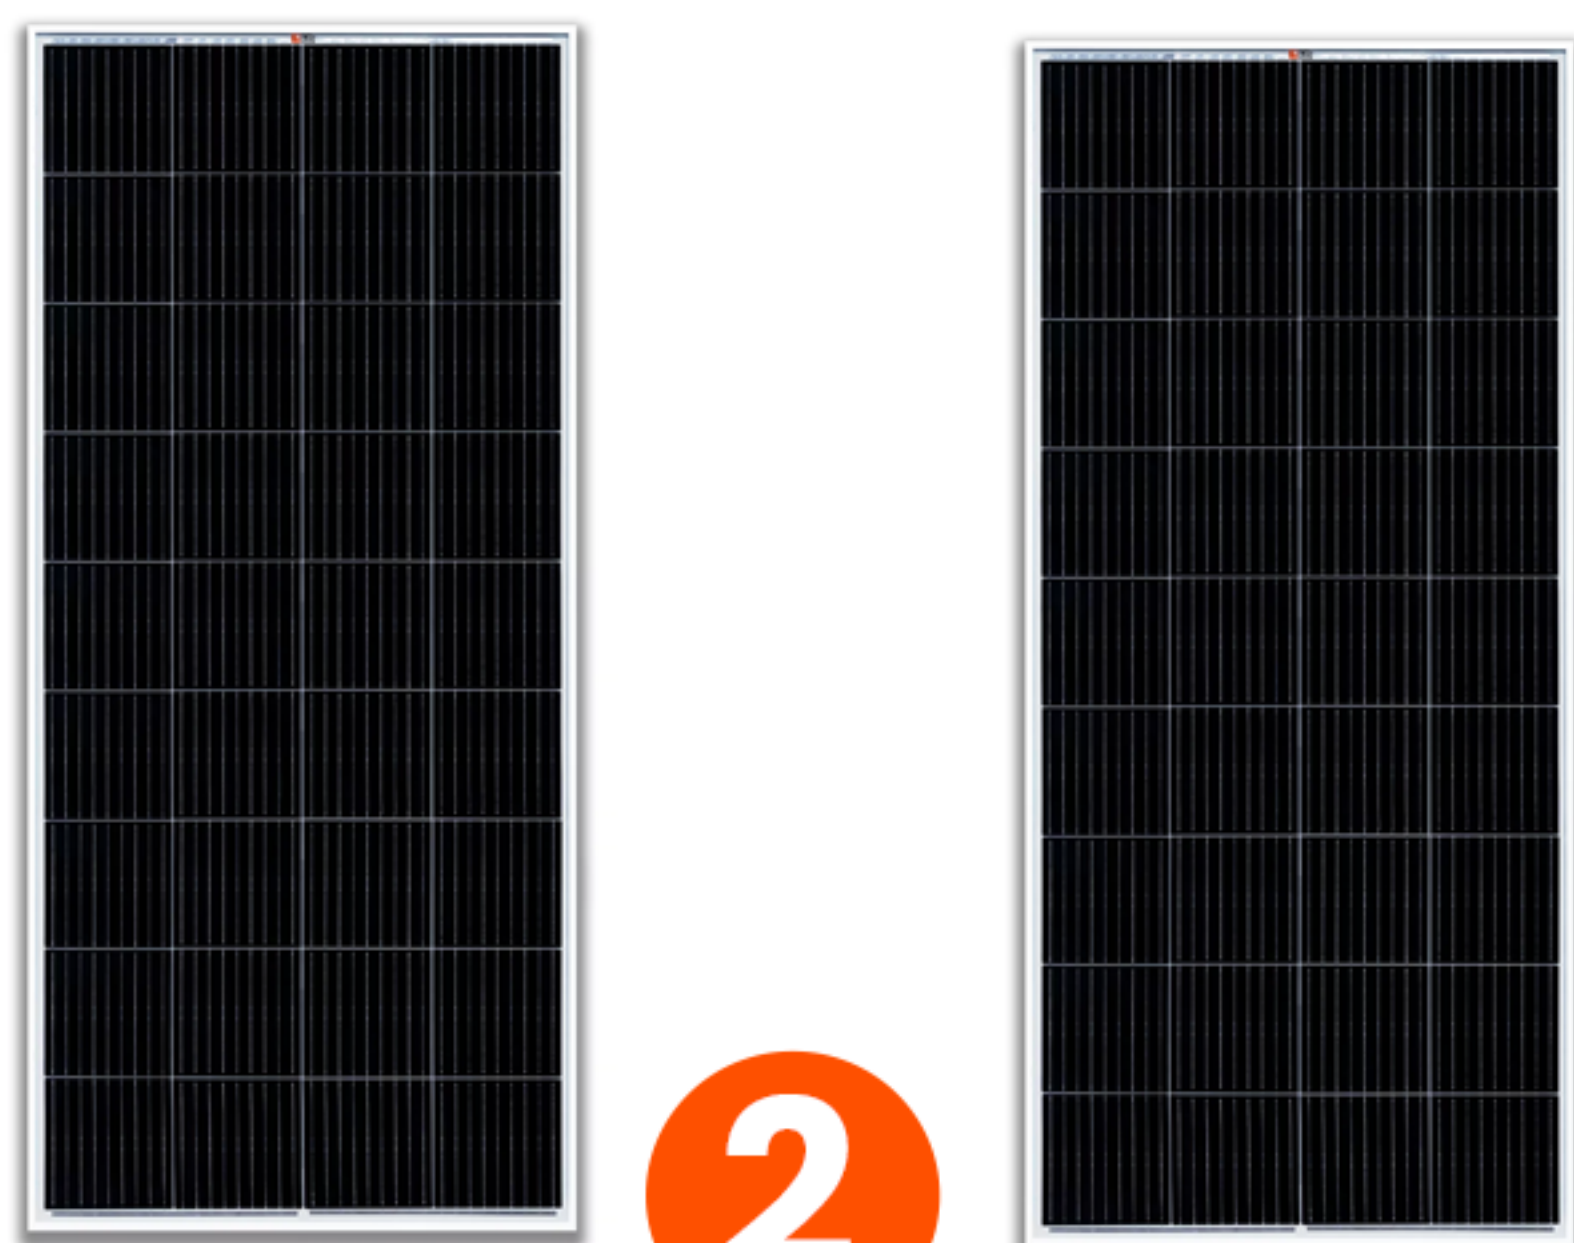

2

3

15A INLINE FUSE HOLDER

WIRES CONNECT SOLAR PANEL TO CONTROLLER

4

40A MPPT CHARGE CONTROLLER



1

ANL FUSE 40A
(OPTIONAL)

WIRES CONNECT
CONTROLLER TO BATTERY



12V LITHIUM BATTERY

12V POWER INVERTER

- 1 Connect Battery Cables to 40A MPPT Charge Controller then to the 12V 100AH Lithium Battery
- 2 Wire the 2, 200W panels in series (positive to negative)
- 3 Connect 15A Inline Fuse to the positive lead of the combined panels
- 4 Use the provided extension cables to connect solar panels to 40A MPPT Charge Controller
- 5 Connect 12V 2000W Inverter to 12V 100AH Lithium Battery