


2.4G Wireless Keyboard and Mouse Combo
User Manual

KUT019

Keyboard overview

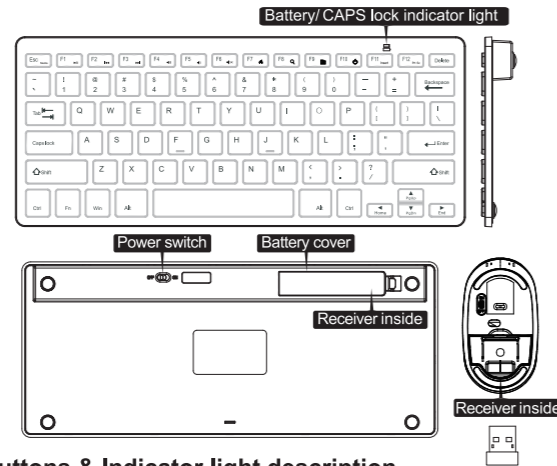

Buttons & Indicator light description

Power LED:
 Switch to [on], Red LED lasts for 3 seconds then turns off.

.1.

Pairing indicator light:
 After entering pairing mode ,the light begins blinking and turns off when keyboard is connected to device.

CAPS lock indicator light:
 Press [CAPS lock] key, green light is on when in UPPERCASE.

Keyboard Shortcuts

How to use shortcut key : FN+Blue character function keys.
 Note: Some multi-function keys need to be used in specific systems.

If using the Windows keyboard, press and hold "Fn" + "Shift" while pressing a desired shortcut key.

| | | | | | |
|--------|---------------|--------|--------------|-----|----------------|
| Esc | Media | F1 | Play/pause | F2 | Previous track |
| F3 | Next track | F4 | Volume up | F5 | Volume down |
| F6 | Mute | F7 | Web Browser | F8 | Search |
| F9 | Favorite | F10 | Power OFF | F11 | Insert |
| F12 | Print Screen | Home | Page heading | End | Page ending |
| PageUp | Previous page | PageDn | Next page | | |

.2.

Features

1. Designed for PC, Laptop, and some tablets with USB port
2. Slim keyboard, thin and sleek mouse combo
3. Reliable 2.4 GHz wireless connection: One nano-receiver connects both the keyboard and mouse using just one USB port
4. DPI button easily adjusts the sensitivity of the mouse between three DPI levels (800/1000/1200)
5. FN+F10: Power off the computer
6. FN+F12: Print Screen

Get Started

Take out the 2.4G nano receiver , insert 2*AAA batteries for each unit (keyboard&mouse).
 Plug the nano receiver into the USB port of your laptop/PC/tablet.
 Switch on both keyboard and mouse and then they will connect to your device automatically.

NOTE: The keyboard will enter sleep mode to preserve power after 10 mins of inactivity, press any key and wait for 3 seconds to activate the keyboard again.

.3.

Solution for keyboard/mouse no response

1. Power off all other 2.4G devices in your room, make sure both the keyboard and mouse are "off".
 2. Plug in the receiver, power on the keyboard and press down the ESC+Q together for 3 seconds, then the keyboard will re-pair.
 3. To re-pair the mouse, please unplug the receiver and replug. After that, press the left & right clicks at the same time and then power on the mouse. Do not release the clicks for 4 seconds and the mouse will work.
- NOTE:** If the above actions failed, please power off both units, remove the receiver and restart from step 2.

Specifications

1. Operating distance:10 meters
2. Modulation system:GFSK
3. Operation voltage: 1.8-3.0V
4. Operating current : <2.0mA
5. Standby current: <0.3mA
6. Sleep current: <40uA
7. Battery:2*AAA
8. Key force: 60±10g
9. Key life: 3 million strokes
10. Operating temperature: -10 - +55°C

.4.

Warranty

Your product carries 60 days manufacture warranty. If you have any issues or inquires with the product, please email support@jellycomb.com and we will respond as soon as possible.

