



## KVM Extension Kit TK-EX4

- Extend KVM controls for distances of up to 100 m (328 ft.)
- Connect to a TRENDnet KVM switch to manage multiple servers
- Convenient OSD management controls
- All required cables included (excluding network cable)

TRENDnet's KVM Extension Kit, model TK-EX4, extends keyboard, video, and mouse controls for distances of up to 100 m (328 ft.). No software installation required—simply connect the transmitter and receiver for full KVM controls. Eliminate the time it takes to walk to the networking room by extending KVM controls to your workstation.

## Ease of Use



### No CD Installation

Simply connect the transmitter and receiver for full KVM management



### Compact

The compact form factors reduce clutter



### OSD

Manage security and access with the convenient on screen display



### Hotkeys

Access the remote server or the OSD with hotkey controls



### Console Override

Console override blocks KVM functionality at the other terminal when in use



### Multiple Server Access

Connect to a KVM switch for multiple server access



### EDID Emulation

Adopt monitor resolution settings from the local or remote monitor

## Security



### Access

Create password protected OSD access



### Auto-Logout


For addition security create an auto-logout OSD time limit




### View Only

Allow remote viewing only

## Networking Solutions

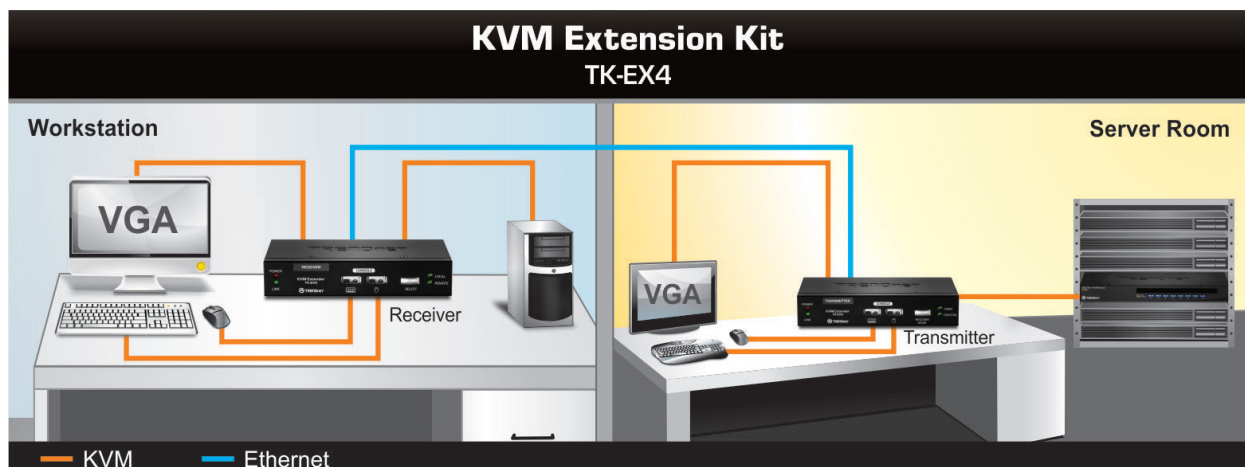

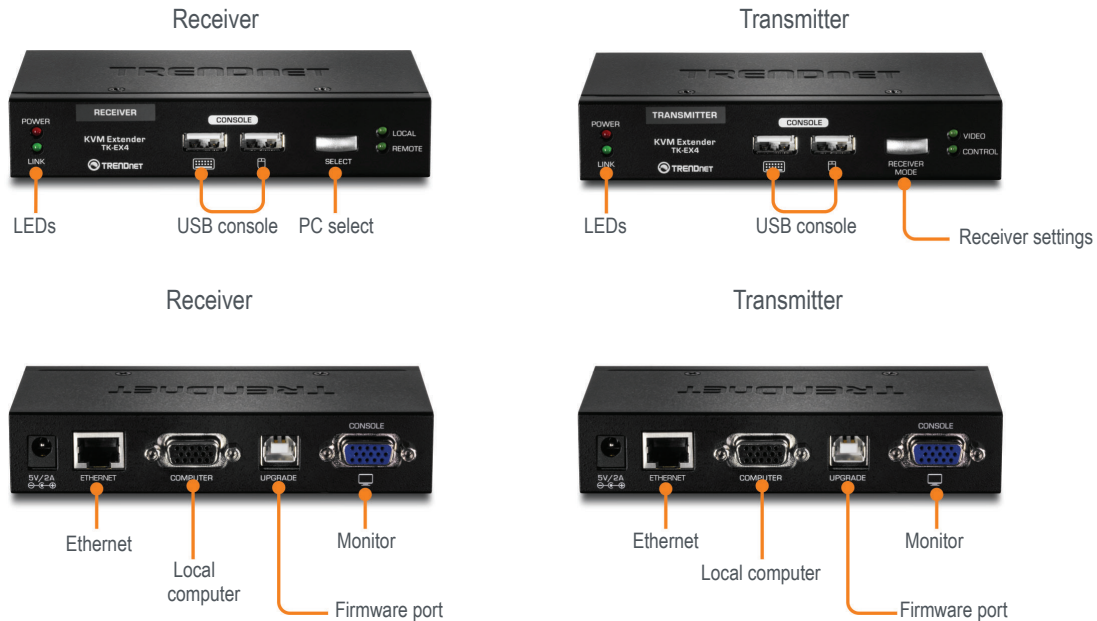

## Specifications

### Transmitter Console Ports

- Keyboard: USB
- Mouse: USB
- Monitor: VGA
- Firmware upgrade port: USB Type B
- Extension: Ethernet port
- LED indicators

### Transmitter Computer Port

- VGA

### Receiver Console Ports

- Keyboard: USB
- Mouse: USB
- Monitor: VGA
- Firmware upgrade port: USB type B
- Extension: Ethernet port
- LED Indicators

### Receiver Computer Port

- VGA

### Computer Connections

- Transmitter: VGA and USB or PS/2
- Receiver: VGA and USB or PS/2

### Monitor Resolution

- Up to 1920 x 1200

### Switching Notification

- Audio

### Switching Controls

- Transmitter: Block access, viewing access only and full control
- Receiver: Local or remote view
- ODS: Password protection, auto ODS logout, four hotkeys options, OSD timeout, console delay function and EDID emulation

### Special Features

- Extend KVM controls up to 100 m (328 ft.)

### Operating Temperature

- 0 – 40 °C (32 – 104 °F)

### Operating Humidity

- Max 90% non-condensing

### Power

- Input: 100 - 240 V AC, 50 - 60 Hz, 0.2 A
- Output: 5 V DC, 2 A
- Max consumption: Transmitter: 2.7 watts, Receiver: 4.7 watts

### Dimensions

- Transmitter/receiver: 130 x 65 x 25 mm (5.1 x 2.6 x 1.0 in.)

### Weight

- Transmitter: 285 g (10.1 oz.)
- Receiver: 290 g (10.2 oz.)

### Warranty

- 2-year limited

### Certifications

- CE
- FCC

### Package Contents

- TK-EX4 Transmitter
- TK-EX4 Receiver
- Quick Installation Guide
- 2 sets of 1.2 m (4 ft.) 3-in-1 VGA combination cables
- 1 set of 1.2 m (4 ft.) USB Type A to B cable
- 2 Power Adapters (5 VDC, 2A)
- 2 USB to PS2 adapter

