



## 2-Port Stackable Video Repeater

### TK-V201S(1.0R)

The compact 2-Port Stackable Video Repeater (model TK-V201S) clones or repeats your computer's viewing field to multiple monitors (this product does not extend a single viewing field over multiple monitors). Support for 1920 x 1440 pixel resolution ensures crystal clear image quality.

Cascade up to three TK-V201S or TK-V401S units to add additional display monitors. Included is a 1.85 m (6 ft.) VGA cable to connect to a computer. LED indicators on the front of the unit convey connection status. No software installation required, simply Plug-and-Play to clone dazzling displays.

- Features**
- Clone or repeat your viewing field onto multiple monitors
  - Supports monitors with a VGA port
  - Supports display resolution of up to 1920 x 1440 pixels
  - 2 x 15-pin VGA output ports and 1 x 15-pin VGA input port
  - 1 x 15-pin VGA input port
  - Daisy-chain up to 3 levels to add additional monitors
  - Supports cable distances up to 65 m (210 ft.)
  - Power LED indicator for power status monitoring
  - Durable metal enclosure
  - Plug-and-play, with no extra software required
  - 2-year limited warranty


# 2-Port Stackable Video Repeater

TK-V201S(1.0R)

## SPECIFICATIONS

Hardware	
Video Input	• 1 x 15-pin VGA HDB Male (includes 1 x 1.85 m (6 ft.) VGA cable)
Video Output	• 2 x 15-pin VGA HDB Female
Resolution	• 1920 x 1440
Signal Type	• WUXGA, HD, UXGA, SXGA+, SXGA, WSXGA, WXGA, XGA, SVGA, VGA, QVGA, and Multisync supported
Cable Distance	• 65 m (210 ft.) max.
Daisy-Chain (Cascade)	• Up to 3 levels
Cables (included)	• 1 x 15-pin VGA cable (male to female), 1.2 m (4 ft.)
Power	• 9V DC, 0.8A
LEDs	• Power
Dimension (L x W x H)	• 131 x 65 x 26mm (6.3 x 2.5 x 1in.)
Weight	• 400g (14.1oz)
Temperature	• Operation: 0°C~40°C (32°F~104°F) • Storage: -20°C~60°C (-4°F~140°F)
Humidity	• 90% (non-condensing)
Certifications	• CE, FCC

## NETWORKING SOLUTIONS

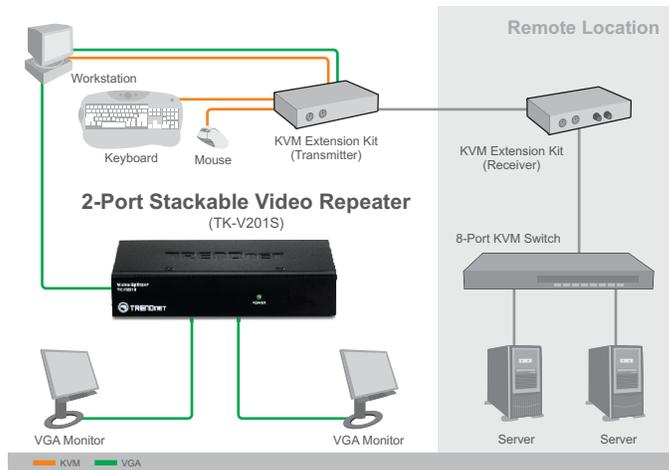

## PACKAGE CONTENTS

- TK-V201S
- Multi-Language Quick Installation Guide
- Power adapter (9V DC, 0.8A)
- VGA cable (1.85m / 6ft.)

## RELATED PRODUCTS

TK-V401S	4-Port Stackable Video Repeater
TK-EX3	KVM Extension Kit
TK-RP08	8-Outlet Remote Power Controller

## CONTACT INFORMATION

**TRENDnet**

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: [www.trendnet.com](http://www.trendnet.com)

Email: [sales@trendnet.com](mailto:sales@trendnet.com)

**1-888-326-6061**

