


ET328I

Energetic reflection light scanner

en 02-2015/09 50128294



Dimensioned drawing

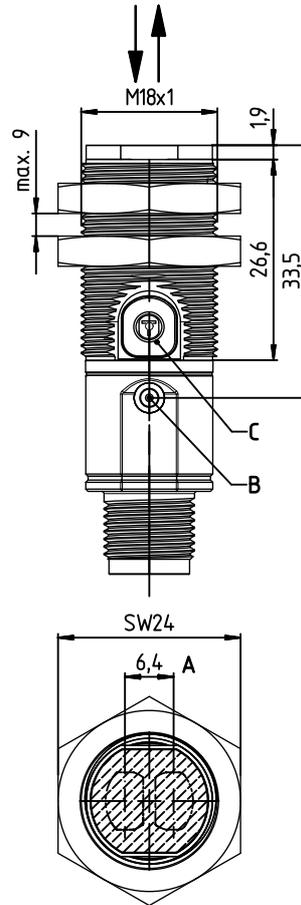

- A** Optical axes
- B** Indicator diode
- C** Teach button


1 ... 1000mm

10 - 30 V
DC

500 Hz

- Energetic reflection light scanner
- Preset scanning range 400mm on white object; scanning range adjustment via teach-in
- Infrared light for universal use
- Active suppression of extraneous light A²LS
- Simple fine adjustment via *omni-mount*
- Embedded mounting option
- Full control through green and yellow indicator LEDs
- Sturdy plastic housing with stainless steel threaded sleeve with cylindrical M18x1 design

Electrical connection

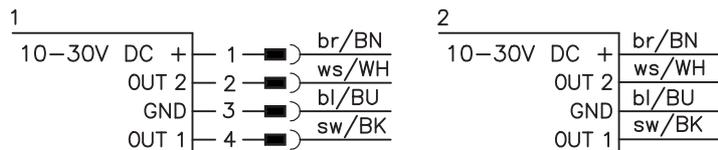

Accessories:

(available separately)

- Mounting systems (BT D18M.5, BT D21M, BT 318...)
- M12 connectors (KD ...)
- Ready-made cables (K-D ...)

We reserve the right to make changes • DS_ET328I_en_50128294.fm

Specifications

Optical data

Scanning range limit ¹⁾	1 ... 1000mm
Scanning range ²⁾	1 ... 700mm
Light source	LED (modulated light)
Wavelength	850nm (infrared light)

Timing

Switching frequency	500Hz
Response time	1ms
Delay before start-up	≤ 300ms

Electrical data

Operating voltage U_B ³⁾	10 ... 30VDC (incl. residual ripple)
Residual ripple	≤ 15% of U_B
Open-circuit current	≤ 20mA
Switching output	.../4P... 2 PNP transistor outputs pin 2: PNP dark switching, pin 4: PNP light switching .../2N... 2 NPN transistor outputs pin 2: NPN dark switching, pin 4: NPN light switching
Signal voltage high/low	$\geq (U_B - 2.5V) \leq 2.5V$
Output current	max. 100mA ⁴⁾

Indicators

Green LED	ready
Yellow LED	reflection (object detected)

Mechanical data

Housing	plastic
Optics cover	plastic
Weight	30g with M12 connector 80g with 2m cable
Connection type	M12 connector, 4-pin cable 2m, 4x0.20mm ²

Environmental data

Ambient temp. (operation/storage)	-40°C ... +60°C/-40°C ... +70°C
Protective circuit ⁵⁾	2, 3
VDE safety class	III
Degree of protection	IP 67
Light source	exempt group (in acc. with EN 62471)
Standards applied	IEC 60947-5-2
Certifications	UL 508, C22.2 No.14-13 ³⁾ 6)

- 1) Scanning range limit: typical scanning range
- 2) Scanning range: ensured scanning range
- 3) For UL applications: for use in class 2 circuits according to NEC only
- 4) Sum of the output currents for both outputs, 50mA when ambient temperatures > 40°C
- 5) 2=polarity reversal protection, 3=short circuit protection for all outputs
- 6) These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/CYJV7 or PVVA/PVVA7)


Tables

1	1	700	1000
2	1	590	850
3	3	390	550
4	5	280	400


1	white 90%
2	gray 50%
3	gray 18%
4	black 6%

□	Scanning range [mm]
■	Typ. scanning range limit [mm]

Diagrams

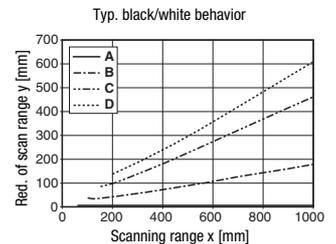

- A white 90%
- B gray 50%
- C gray 18%
- D black 6%



Remarks

Operate in accordance with intended use!

- ⚠ This product is not a safety sensor and is not intended as personnel protection.
- ⚠ The product may only be put into operation by competent persons.
- ⚠ Only use the product in accordance with the intended use.

- With the set scanning range, a tolerance of the scanning range limits is possible depending on the reflection properties of the material surface.

ET328I

Energetic reflection light scanner

Order guide



The sensors listed here are preferred types; current information at www.leuze.com.

		Designation	Part no.	
Sensors with axial optics	With M12 connector	Pin 4: PNP light switching, pin 2: PNP dark switching	ET328I-400F.3/4P-M12	On request
		Pin 4: NPN light switching, pin 2: NPN dark switching	ET328I-400F.3/2N-M12	On request
	With cable, 2m	Pin 4: PNP light switching, pin 2: PNP dark switching	ET328I-400F.3/4P	50128196
		Pin 4: NPN light switching, pin 2: NPN dark switching	ET328I-400F.3/2N	50128197
Accessories for optimum fastening				
	Mounting system <i>omni-mount</i>	BT318B-OM	50121904	
	Mounting bracket for standard mounting	BT D18M.5	50113548	
	Mounting bracket for <i>omni-mount</i>	BT D21M	50117257	

Part number code

		E	T	3	2	8	I	-	4	0	0	F	.	3	/	4	P	-	M	1	2
Operating principle																					
ET	Energetic reflection light scanner																				
Series																					
328I	Series 328 with infrared light																				
Scanning range presetting																					
-400F	Scanning range preset to 400mm (white object, 90%)																				
Equipment																					
.3	Axial optics, teach-in via teach button																				
Switching output/function /OUT1/OUT2 (OUT1 = Pin 4, OUT2 = Pin 2)																					
4	PNP, light switching																				
P	PNP, dark switching																				
2	NPN, light switching																				
N	NPN, dark switching																				
Electrical connection																					
-M12	M12 connector, 4-pin																				
N/A	Cable, standard length 2m																				

Teach-in method

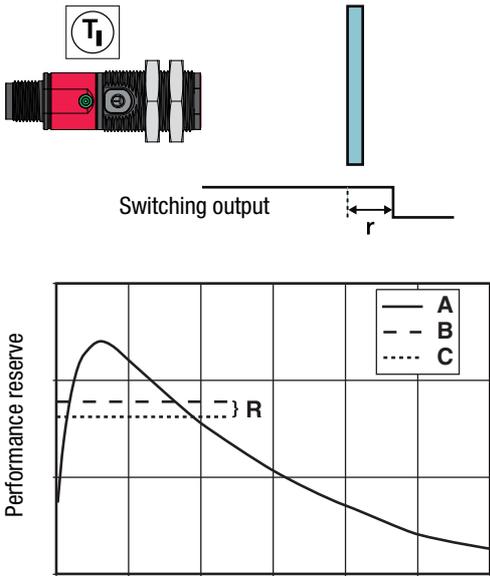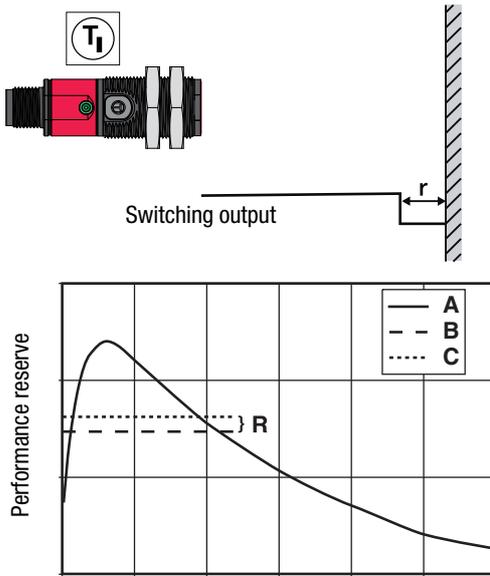Teach	Operating level 1	Operating level 2
Standard Teach	<p>Teach on object:</p> <p>With this teach event, the object is located in front of the sensor. The switching threshold is set by the teach so that the object is detected with tight signal reserve R. Thus, the object is detected even if the distance increases by the value r with respect to the distance during the teach.</p>  <p>A Signal - object B Teach on object C Switching threshold</p>	<p>Teach on background:</p> <p>This teach is only suitable for applications with a fixed background. The teach is performed directly on the background without an object. The switching threshold is set to a value that is just above the background signal (signal reserve R). Thus, objects can be detected up to a distance of r in front of the background.</p>  <p>A Signal - background B Teach on background C Switching threshold</p>


ET328I

Energetic reflection light scanner

Operation via teach button


Teach in operating level 1

- Press teach button until the **yellow** LED flashes.
- Release teach button.
- Ready.



Teach in operating level 2

- Press teach button until **green** and **yellow** LEDs flash **alternately**.
- Release teach button.
- Ready.



Adjusting the switching behavior of the switching output – light/dark switching


This function permits inversion of the sensors' switching logic.

- Press teach button until the **green** LED flashes.
- Release teach button.
- The LED then displays the changed switching logic for 2s:

YELLOW Cont. light = switching outputs **light switching** (in the case of complementary sensors, Q1 (pin 4) light switching, Q2 (pin 2) dark switching), this means output active when object is detected.

GREEN Flash. light = switching outputs **dark switching** (in the case of complementary sensors, Q1 (pin 4) dark switching, Q2 (pin 2) light switching), this means output inactive when object is detected.

- Ready.



2s YELLOW = light switching

or



flashes GREEN for 2s = dark switching

