



MARTEK® MARK 25

ULTRAPURE WATER DISSOLVED OXYGEN ANALYZER

MARTEK INSTRUMENTS INC. MANUFACTURERS OF WATER QUALITY INSTRUMENTATION



*... for accurate, continuous,
in situ monitoring of up to four
ultrapure water dissolved
oxygen measurements*

The Martek **Mark 25 Ultrapure Water Dissolved Oxygen Analyzer** is a highly accurate, simple-to-use monitoring system that provides continuous monitoring of up to four ultrapure water sample points to the low parts-per-billion (ppb) level at an affordable price.

Designed to provide maximum performance and value, the Mark 25's ability to monitor up to four sample points along with a full complement of output capabilities allows the operator to customize the system to any application. A large, bright 4 digit LED display presents data and setup options quickly while DB-9 connectors and removable terminal strips allow for quick sensor, recorder, and alarm hookups. There's even an ON/OFF switch located on the rear panel.

Installation, calibration, and sensor maintenance are easy and require a minimum of experience. Housed in a standard 1/4 DIN enclosure, the Mark 25 easily replaces inoperative or obsolete equipment without modification to existing sample panels. And, with a five year warranty, the Mark 25 is designed for years of worry-free service.


The Mark 25 is ideal for all high purity processes in nuclear and high-performance fossil fuel power plants; condensate polishing systems and demineralizers; semiconductor and pharmaceutical manufacturing plants; and other industrial applications.

- **Large, 4 digit LED displays temperature and dissolved oxygen for up to four sample points**
- **Four manual ranges: 0-20 ppb, 0-200 ppb, 0-2 ppm, 0-20 ppm and auto-ranging**
- **Manual and Automatic digital calibration**
- **Four 4-20 mA analog and one RS232 digital output**
- **Four alarm set points and password protection**
- **Easy to install, calibrate, and maintain**
- **5 year warranty on analyzer**

MARTEK MARK 25 DISSOLVED OXYGEN SPECIFICATIONS

Parameter	Range	Resolution	Accuracy
Temperature	0 – 50 °C	0.01 °C	±0.1 °C
Dissolved Oxygen	0 – 20 ppb	00.01 ppb	±0.1 ppb
	0 – 200 ppb	001.0 ppb	±1.0 ppb
	0 – 2 ppm	0.001 ppm	±0.01 ppm
	0 – 20 ppm	00.01 ppm	±0.1 ppm

Power 98-240 VAC, 50/60 Hz, optional 24VDC
Recorder Output Four, full scale 4-20 mA DC analog outputs and one RS232C digital output
Alarm Output Four relays, 1 amp 125V
Weight 2 lbs (0.9 kg) including sensor with 6 ft (2 meters) cable
Construction Analyzer: ABS plastic, NEMA 12 (IP65), Panel mount (mounting hardware included) wall
 Sensor: Galvanic
Warranty Analyzer: 5 years

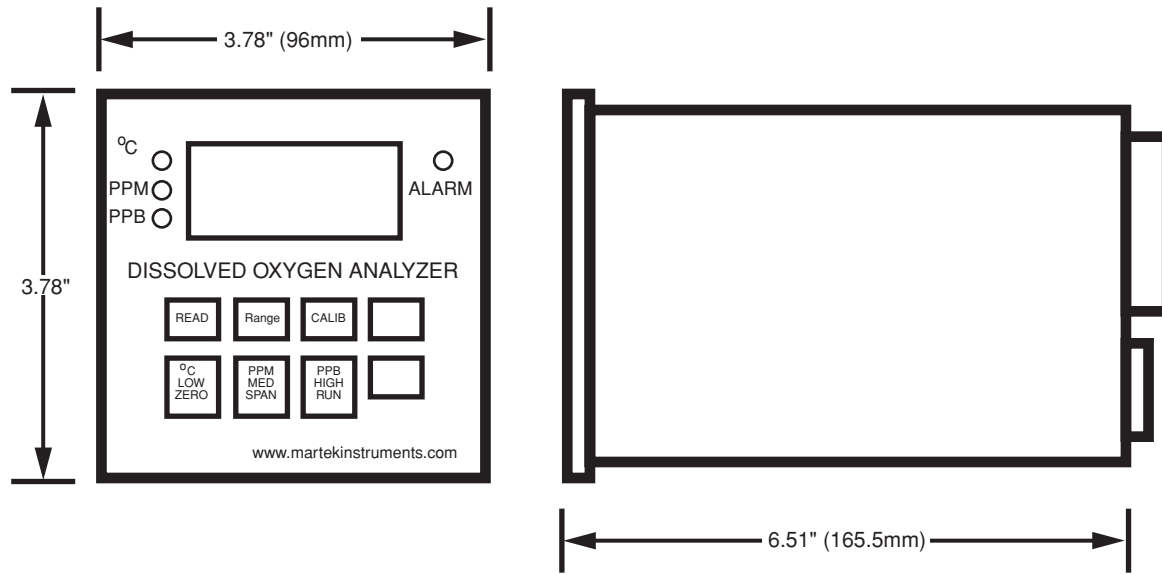

ORDERING INFORMATION

P/N 185-10DO Mark 25 Analyzer
P/N 185-27 Dissolved Oxygen Sensor with 6 ft. (2 meter) cable.
P/N 180-51 Type 316 SS Flow Chamber

NOTE: All prices FOB Factory. Specifications and prices subject to change without prior notice. Warranty subject to certain conditions. For complete warranty information, contact the factory.



MARTEK INSTRUMENTS, INC.

P.O. Box 14448 Raleigh, North Carolina 27620 USA
 Phone: (800) 628-8834 or (919) 790-2371 Fax: (919) 790-2375
 www.martekinstruments.com Email: info@martekinstruments.com