



# Formula 501

## DESCRIPTION

Ad-Tech 501 is a high temp hot melt with a lower density which will allow for reduced usage.

## TYPICAL USES

Ad-Tech 501 is able to bond to single side OPP and is resistant down to 15°F.

## NON-TOXIC

Ad-Tech 501 meets FDA CFR 175.105 adhesive requirements for intermittent contact with food.


## PRODUCT SPECIFICATIONS

Viscosity @ 350°F (177°C), Centipoise	15,250
Softening Point °F (°C)	214° (101°)
Specific Gravity	.88
Open Time (approximately) seconds	28
Set Time (approximately) seconds	17
Color	Milky White

## Test Method

Brookfield Thermosel
ASTM E28-67
ASTM 1475
Ad-Tech
Ad-Tech

## VISCOSITY PROFILE

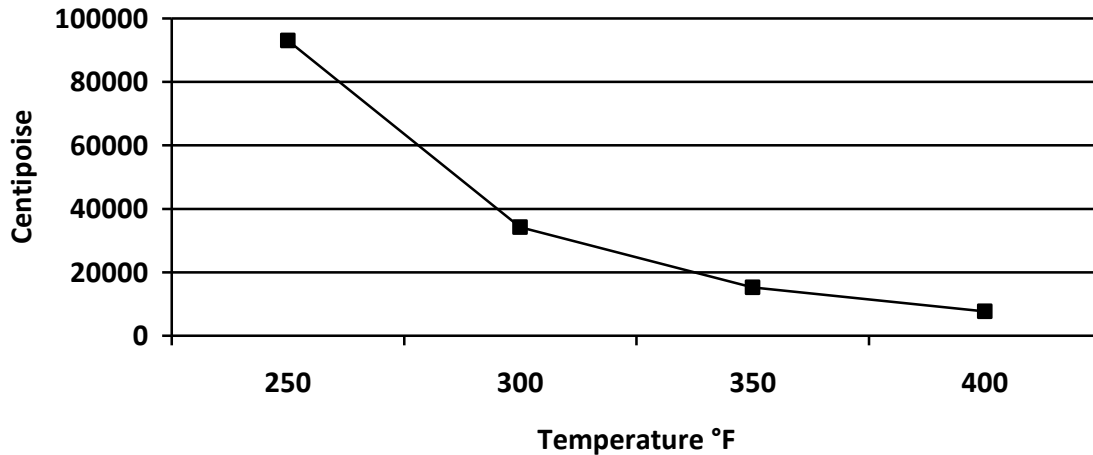

## APPLICATION

For optimum performance, Ad-Tech 501 should be applied in one of Ad-Tech's reliable hand held hot melt applicators.

**IMPORTANT NOTICE:** All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable but the accuracy of completeness thereof is not guaranteed, and the user should determine the suitability of the product for the intended use. Ad-Tech disclaims any responsibility for any warranties of merchantability and fitness for purpose, verbal recommendations of its representatives and consequential damages.