Sunbeam Service Sheet No. 10


Subject: Oil Pressure Switch (S.7 & S.8 models)

Date: No date shown

To prevent premature failure of the oil switch, due to overheating, it has now been modified and an extension piece utilised which projects the switch into the cooling air stream.

On these models fitted with a switch direct on the head or with a plain plug fitted in place of the switch, the new extension should be fitted so that the switch is at the lowest position.

In addition, it will be necessary to modify the plug cover in accordance with the drawing below.

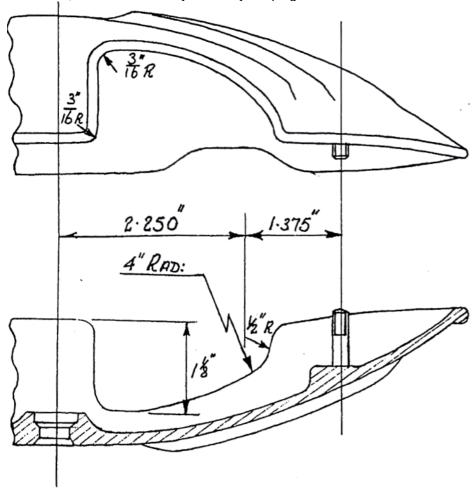

SERVICE DEPARTMENT B.S.A. CYCLES LIMITED