

Smart Sensor App



Best Practices—Install and Commissioning

- One room at a time
- Install the sensors per installation instructions, restore power
- Open the Smart Sensor App on a smartphone or tablet

1

Connect to Device


- Open the Smart Sensor App and ensure your mobile device's Bluetooth is enabled
- Press and hold the ON/OFF button on the sensor for 2-5 seconds until the light behind the PIR lens flashes BLUE
- Available devices will be displayed; if more than 1 device is displayed, you can click on the IDENTIFY button to confirm the right device (LEDs on selected device will blink GREEN)
- Click on the appropriate listed device in the App to pair

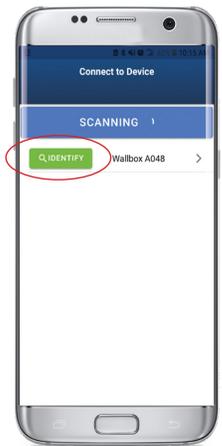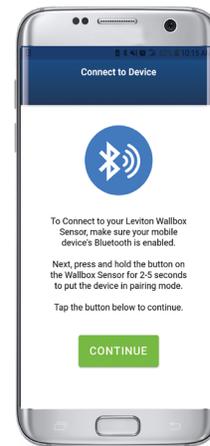

2A


Configure the following from the Settings page:

- Rename the Device, if desired

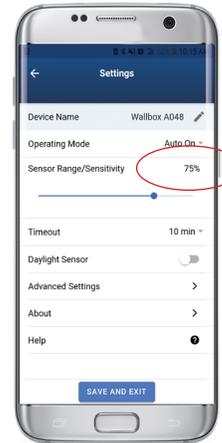

2B


- Select the operating mode
 - Occupancy (Auto-ON/Auto-OFF)
 - Vacancy (Manual-ON/Auto-OFF)

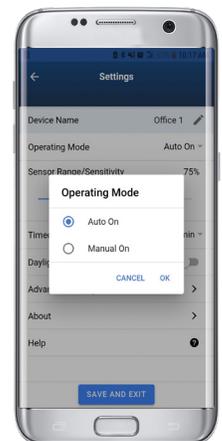

2C


Settings Page (continued):

- Adjust the sensor range and sensitivity

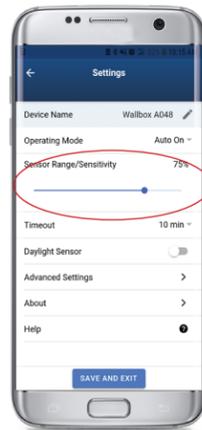

2D


- Adjust the timeout
- Choose from 30 seconds to 60 minutes or Always ON

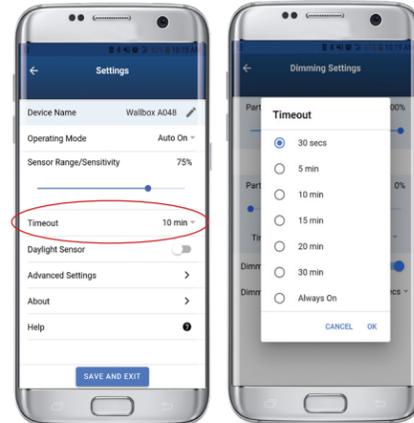

2E

- Enable Daylighting
 - Close shades, curtains, and other external lighting sources if possible and step away from the sensor during calibration
 - Calibration takes 1 min
 - Adjust Sensor Daylighting target level*
 - Adjust Daylighting response time*

*As necessary

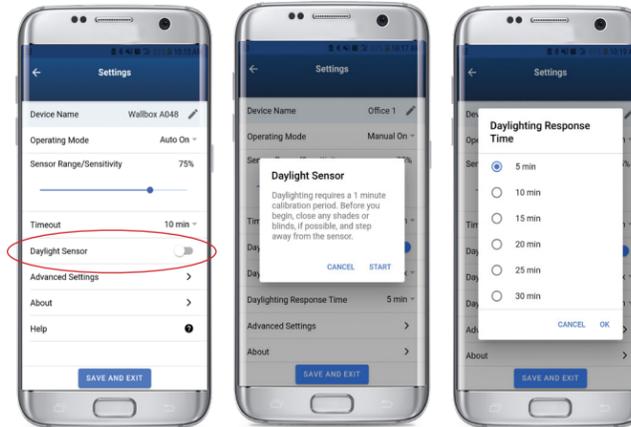


3

From the Settings page, you can also configure Advanced Settings for the following:

- Dimming Options*
- Nightlight Options
- LED Indicator Light Options
- Change Passcode

* For dimming models only

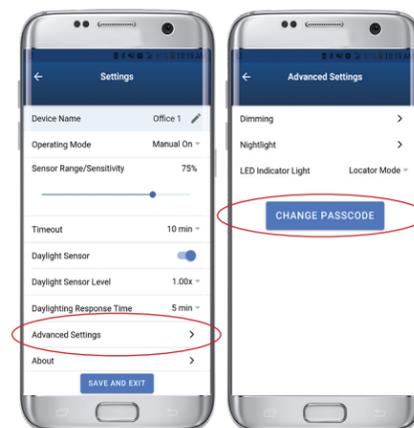


3A

Dimming Options*:

- Partial-ON
 - 1-100%
- Partial-OFF
 - 1 to 1% below Partial-ON level
- Partial-OFF timeouts:
 - 30 secs to Infinity
- Adjustable dimming LED timeouts



* For dimming models only

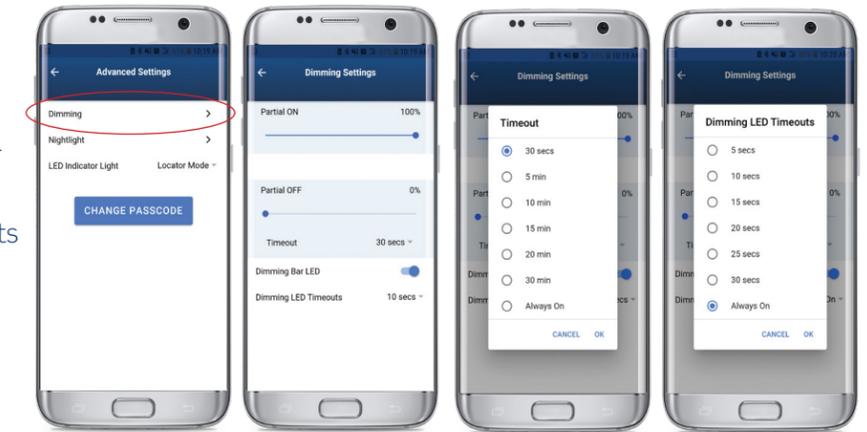

3B

Nightlight Options:


- The integrated nightlight is available on all models
- RGB Nightlight:
 - Color options can be previewed before setting
 - The lighting Intensity can be adjusted to suit space needs

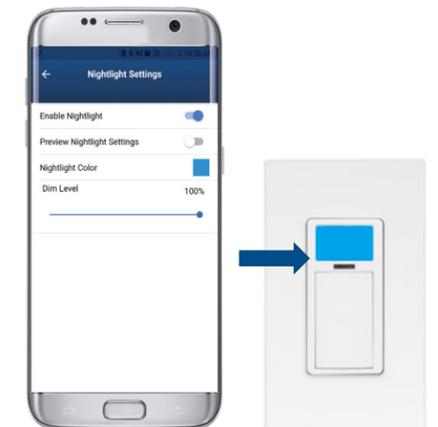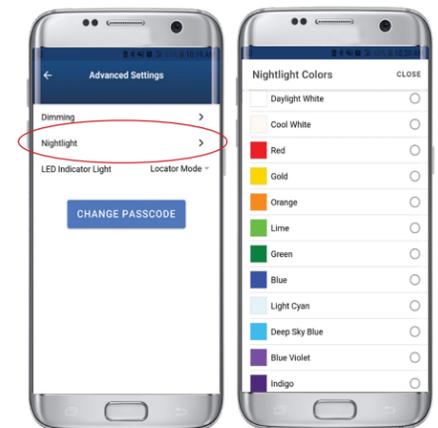

3C

LED Indicator Light Options:


- Locator Mode = ON when load is OFF
- Status Mode = ON when load is ON
- Always OFF

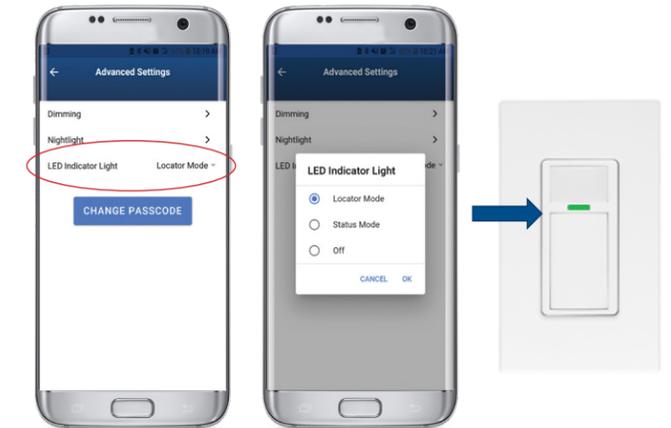

3D

Password Protection:


- User can update the passcode to protect settings
- If the passcode is forgotten, it can be reset with current settings intact

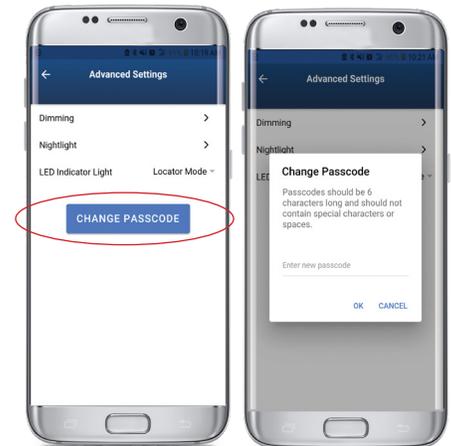

4A


From the Settings page, you can also get information about the device and helpful hints:

- About this Device:
 - Model #
 - Firmware level

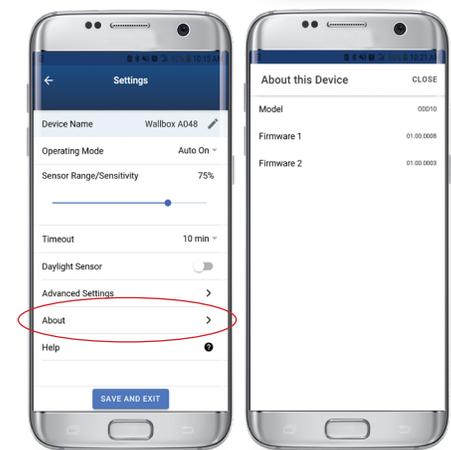

4B

- Helpful hints
 - Phone numbers for customer service and additional support
 - Feature/Setting definitions

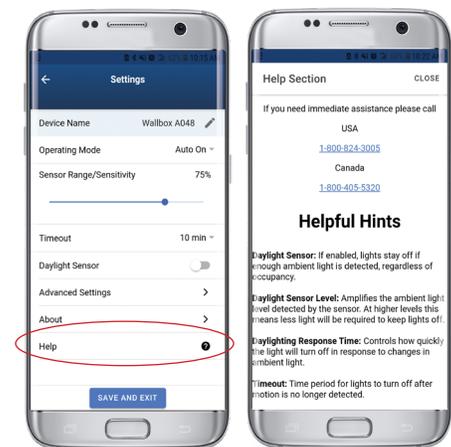

Leviton Manufacturing Co., Inc. Lighting & Controls

20497 SW Teton Avenue, Tualatin, OR 97062 tel 800-736-6682 fax 504-404-5594 tech line (6:00AM-4:00PM PT Monday-Friday) 800-954-6004

Leviton Manufacturing Co., Inc. Global Headquarters

201 North Service Road, Melville, NY 11747-3138 tel 800-323-8920 fax 800-832-9538 tech line (8:30AM-7:00PM ET Monday-Friday) 800-824-3005

Visit our website at: www.leviton.com/smartsensors

© 2020 Leviton Manufacturing Co. Inc. All rights reserved. Subject to change without notice.

LES-G-10553/E20-aja