

Multi Dash Cam, 1 to 4 Cams with 7" LCD USER MANUAL

SAFE DRIVING



1-4CH Real-time Recording

7 INCH HD 1024(W) x RGBx600(H)

Brightness" 500cd/m

Support max 128GB SD Card

High-End Metal Monitor Shell Design

2 Way Video

Power DC12V-35V

PAL/NTSC



ITEMS NO.	NAME	DESCRIPTION
1	Monitor Screen	1024*600 HD IPC Screen, 7 Inch
2	Back Monitor Shell	Metal Materials, Better heating reduction
3	SD Card Slot	2*SD Card Slot
4	Bracket	Installation Bracket
5	Tale Cable	Wire with Extend cable for 4-CH/8-CH AHD Video Input and 4-CH I/O input

CONTENT

1. SPECS
2. WIRE DRAWING
3. REMOTE CONTROL
4. MONITOR BUTTON
5. MENU INTRODUCTION
6. ADDITIONAL NOTES
7. BACK UP INTRODUCTION

SPECS


MONITOR SPECIFICATION

Chipset	Hi3520D V300
Screen Size	7 INCH
Screen ratio	16:9
Black Light Luminance	LED,500cd/m2
Resolution	1024*600
Operation Language	Chinese/English/Spanish etc
Viewing Angle	Hor: L(70) R(70); Ver: UP(50) DOWN(70)
Image reversion	UP/Down and Left/Right
Power requirement	12 / 24V DC , Range 11-32V DC
Power consumption	<8W
Shockproof level	10G

DVR FEATURES

System	Chipset	Embedded Linux OS
	Language	Chinese/English
	System	Linux
Record	Video Standard	PAL/NTSC
	Video Input	4-CH AHD Input
	Resolution	1080P/720P
	Image Quality	4 levels adjustable
	Record Mode	Boot Record

Audio	Audio Input	1-CH Audio input
	Audio recording	Audio & Video synchronized recording
	Audio Compression	G.726
Playback	Video Search	Recent 3 days/1 week/2 weeks etc,search by time
	4-CH Playback	Support
	Fast /Back Forward	Support 2x/4x/8x Fast/Back forward Playback
Interface	SD Card Slot	1 SDXC High speed card slots (up to 128GB)
	I/O Input	4-CH I/O Alarm input
Others	Reverse Line	Support
	Voltage	DC8-36V
	Working Temperature	℃ to +70℃
	Humidity	20% to 80%
	Dimension	150mm*88mm
	Weight	0.78Kg

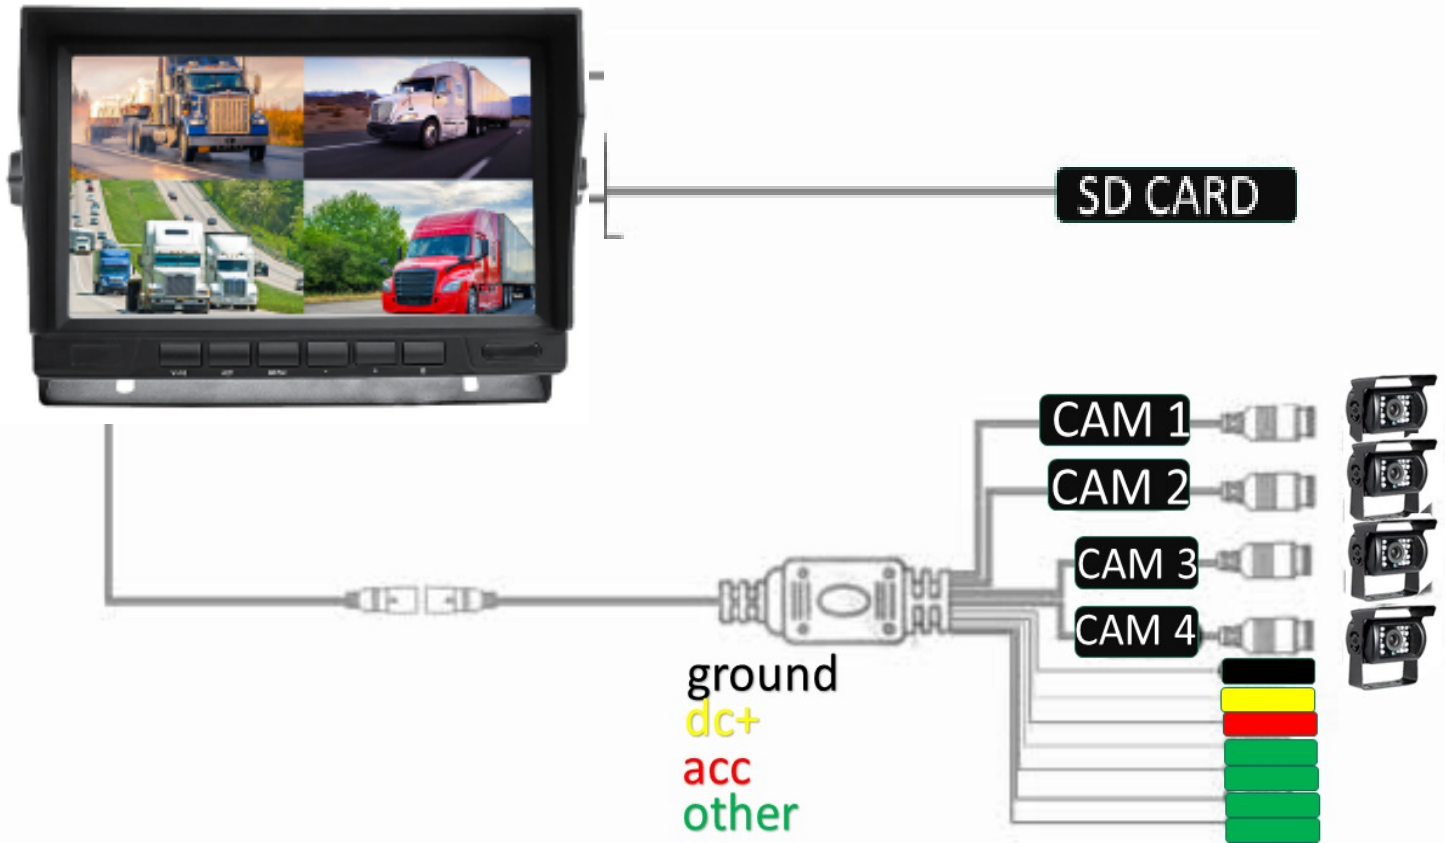


Powering Unit


Black Wire to a ground source

Tie dc+ wire and acc wire together and connect to a power source

REMOTE CONTROL

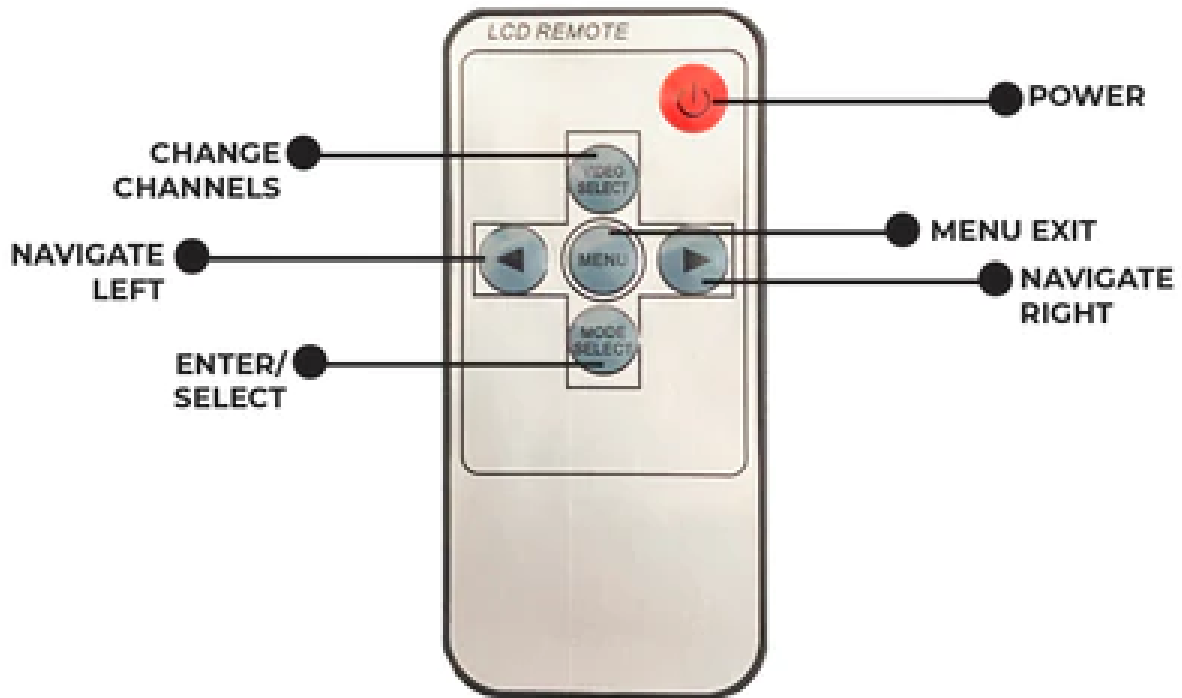

MONITOR BUTTON

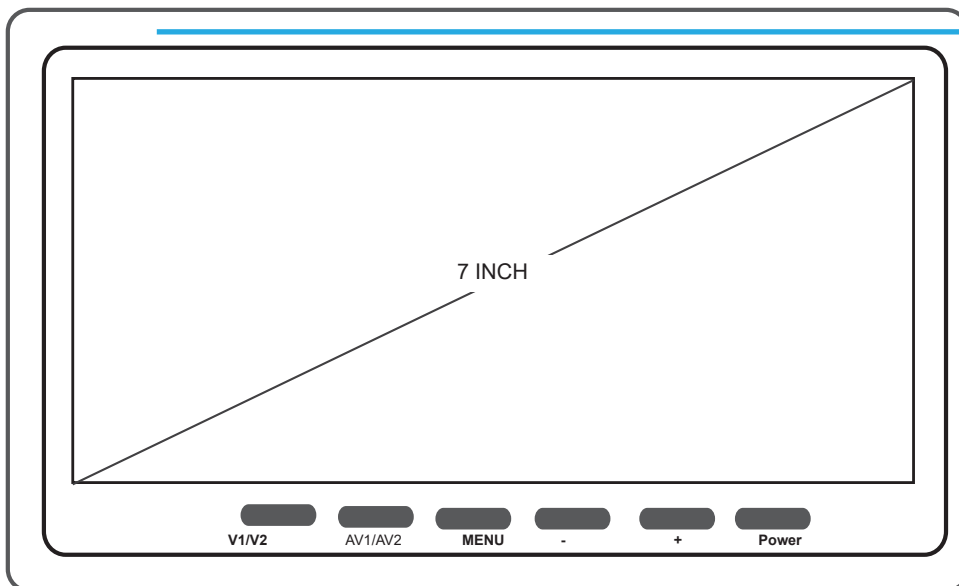

BUTTON DESCRIPTION

	Login/Logout Menu
	Menu
	Switch AV1/AV2 Video Input Turn Over Main Menu Page
	Go up in the sub menu Reduce Number Value setup
	Confirm Button Left/Right Move
	Go Down in the sub menu Add Number Value Setup like time setup
	Press for a time , Shutt Off the Screen Press for Long time , Shut Down Monitor
	IR Led light for Remote control