

4G/WIFI/GPS Live Viewing 1080P 3-8 Cam MNVR Black box with SDD (3rd Gen)

Quick Start Guide



New Server Migration Reasons:

Old server can not meet the requirements of development for more 4G MDVR devices on the IP server. Having too many devices on an older server causes buffering when viewing video. Enjoy our new server for better service experience.

*Additional Quick Start Process available below if you have these discontinued 4G MNVR products

1st Gen



2nd Gen




*Note - All 4G MNVR devices will be using the NEW, IMPROVED, UPDATED IP SERVER & PORT #

NEW URL IP SERVER THAT WILL BE USED IS: <http://113.96.131.200/808gps/login.html>


Click or copy and paste IP Server link to your browser.

MUST ENABLE / ALLOW "FLASH" after you have entered new IP server URL into your browser

ACCESSORIES




Power Cable



I/O Cable



Remote Control



Video Input Cable




MNVR Keys



4G / GPS / WIFI Antenna






SDD CADDY SCREWS



QR Code Manual Page

Power Connection

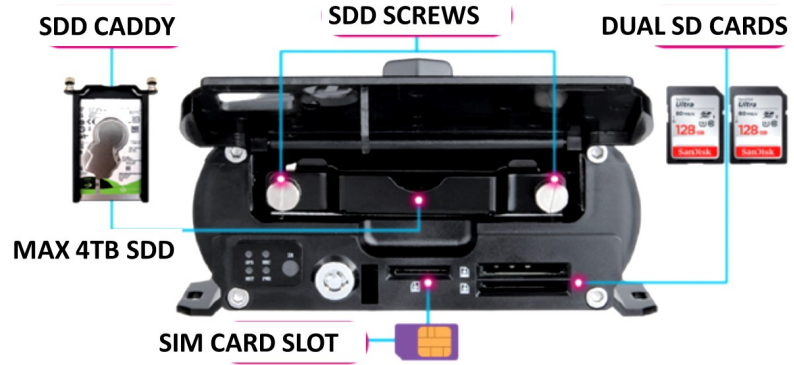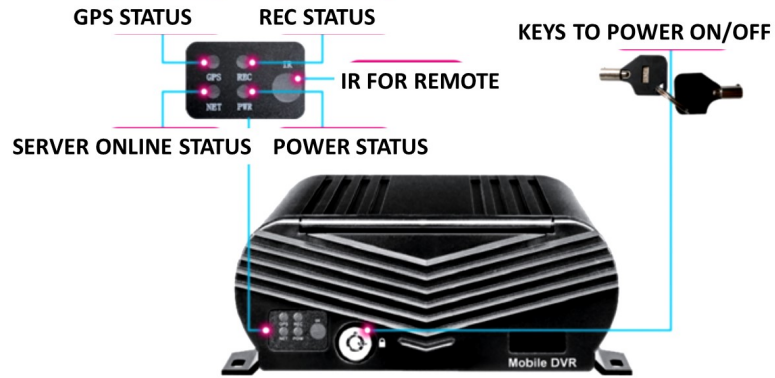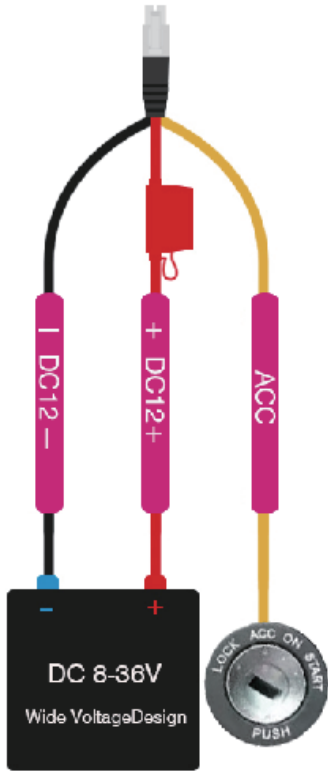


SDD Caddy Installation


1 Open MNVR Shell with included Keys




2 Twist screws and take out of the SDD Caddy

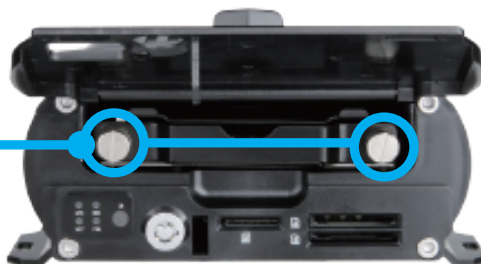


3 Insert SDD Into SDD Caddy

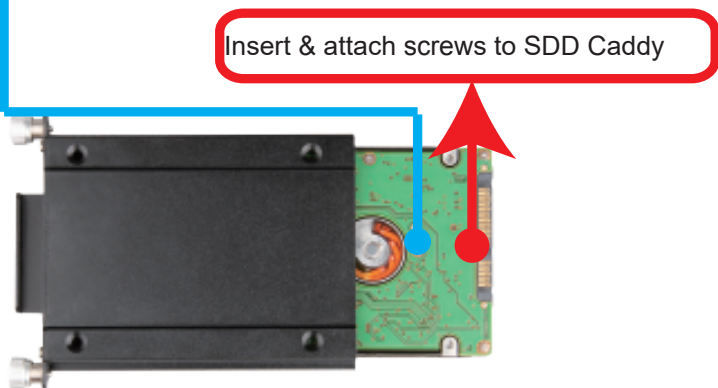

Screws SDD and Insert SDD Caddy

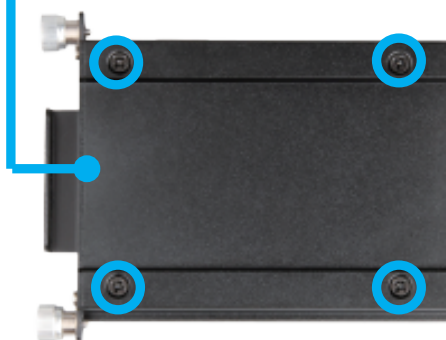

SSD 2.5"

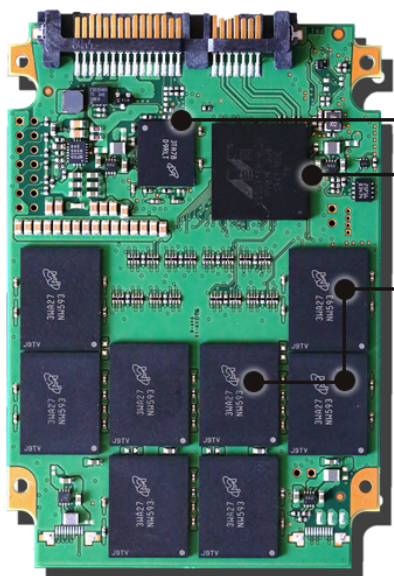

Cache
Controller
NAND Flash Memory

- FASTER PERFORMANCE
- NO VIBRATIONS OR NOISE
- MORE ENERGY EFFICIENT

Shock resistant up to 1500g
(operating and non-operating)

4G/WIFI/GPS Live Viewing 1080P 3-8 Cam MNVR Black box with SDD (3rd Gen)

How to change/enter new IP server and port #:

Login- MDVR Menu=>Advance Tab=>COMM=>CMS Change the server IP and Port #'s=> SAVE-Restart Device


CMS-Enable

Enter YOUR Device ID located on your black box labeled as Account #

USE THIS **Center IP- 113.096.131.200**

Leave Center Domain blank

Center Port- 6608

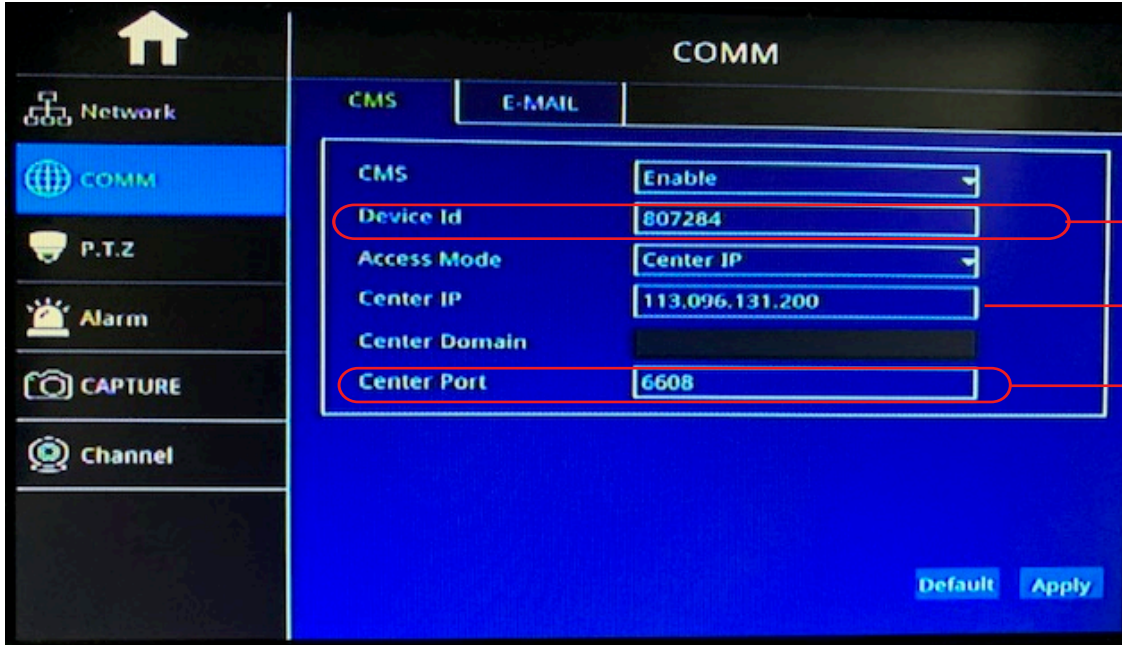

Enter Device ID if it is not entered already


Change the Center IP to 113.096.131.200

Change Port to 6608

Enter, copy&paste or CLICK <http://113.96.131.200/808gps/login.html> into browser to open the CMSV6 platform

Username: Labeled on your black box

Password default is:000000

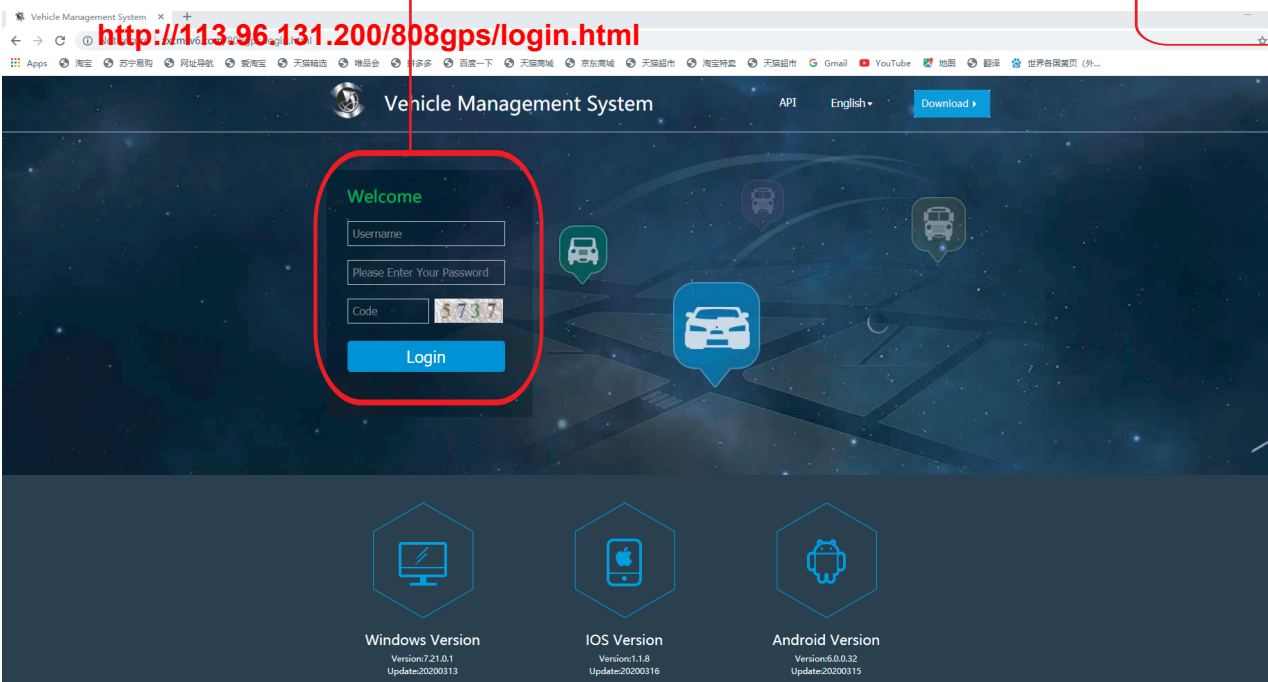




1st Gen New Server Migration User Guide

How to change/enter new IP server and port #:

Steps: Login MDVR Menu=>Select Network=>Server=>Change the server IP and Port #'s=> SAVE-Restart Device

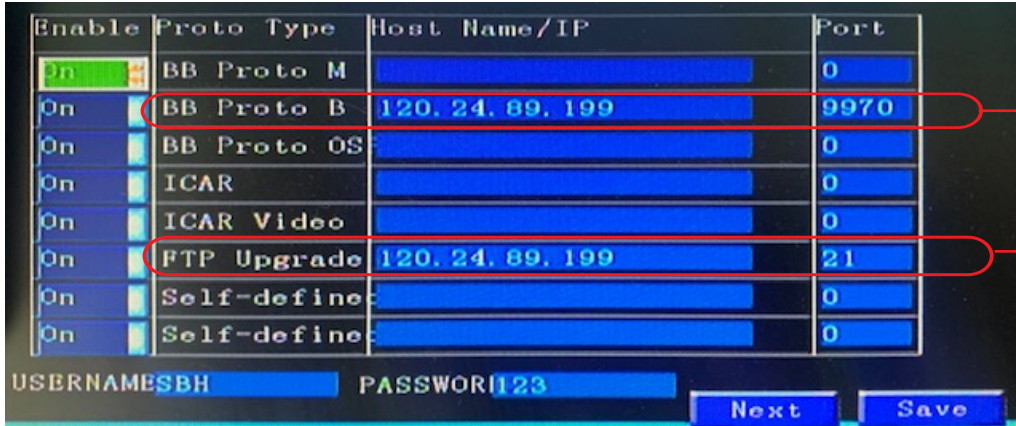

Change the Center IP to to 113.096.131.200
Change Port to 6608


Change the Center IP to to 113.096.131.200
Change Port to 6608



2nd Generation New Server Migration User Guide

How to change/enter new IP server and port #:


Steps: Login MDVR Main Menu=>Select Network Icon=>Select Server Icon=>Change server IP and Port #=>Select SAVE - Restart Device

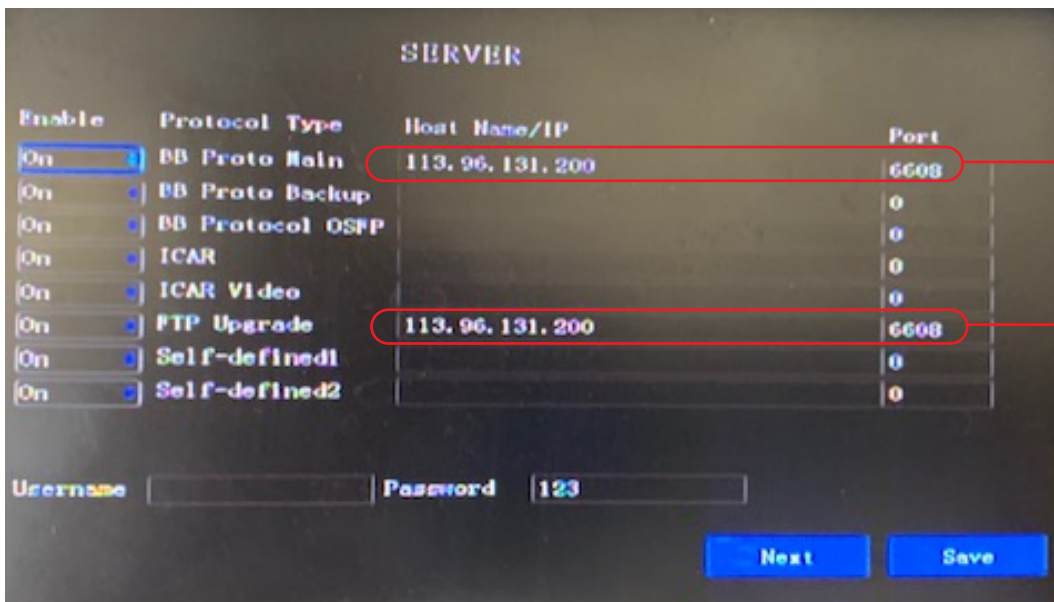

Change the Center IP to to 113.096.131.200
Change Port to 6608

Change the Center IP to to 113.096.131.200
Change Port to 6608

Step-02: Enter "http://113.96.131.200/808gps/login.html" into browser to open the CMSV6 platform

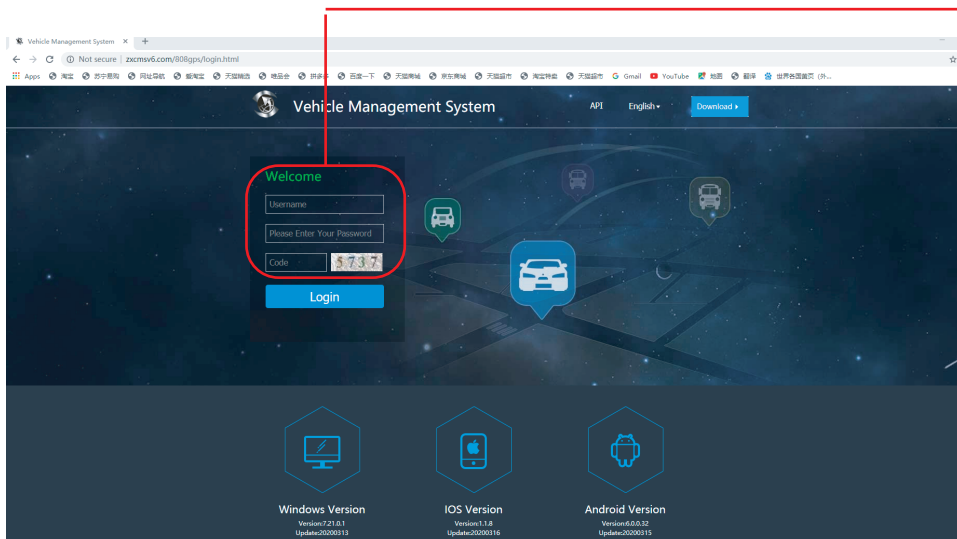

Username: May have been given to you or it may be labeled on your black box

Password default is:000000 unless you previously changed it.

THIS PROCESS IS ONLY IF YOUR SYSTEM HAS AN INTERNET CONNECTION AND IS ONLINE

Instructions Process to remote live view cameras on a desktop, laptop

Copy/Paste URL into web browser

<http://113.96.131.200/808gps/login.html>

Process for Gen 1 and Gen2 discontinued MNVR devices



1. Account name: Was Given to you and may start with: MNVR
2. Password: 000000 (unless you have changed it)
3. Enter Code
4. Login

Make sure that Flash Web PC Settings are set "allowed"

1. Check the box on top left corner next to "your order number"
2. Select the "+" sign next to your device # and picture of truck logo to display CH1, CH2, CH3, CH4 - CH8
3. Right click on CH1, CH2, etc (depends on how many cameras you may have) video cam log and select Preview Main Stream or Sub Stream


IOS and Android devices Mobile viewing

In the APP store, type the app name "CMSV7"

Process if you have these discontinued 4G MNVR products



1. Account name: Was Given to you and may start with: MNVR
2. Password: 000000 (unless you have changed it)
3. ENTER IP Address: 113.96.131.200
4. LOGIN
5. Select "Video"
6. Press "Play icon" to view each camera

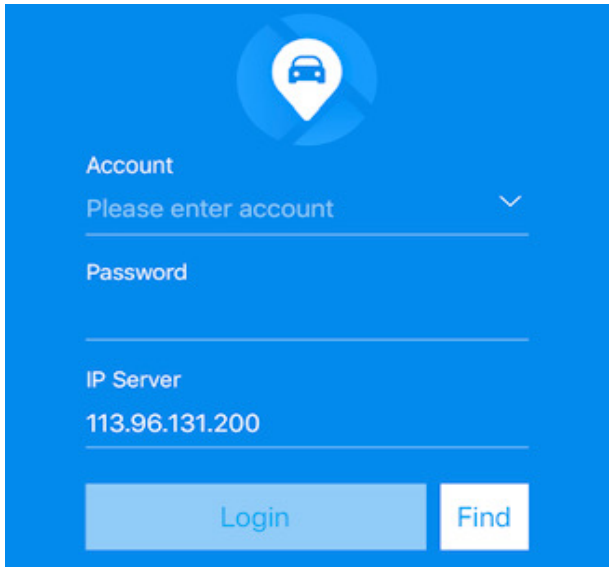

Process if you have this 4G MNVR product



1. Account name: Located on your black box
2. Password: 000000
3. ENTER IP Address: 113.96.131.200
4. LOGIN
5. Select "Video"
6. Press "Play icon" to view each camera

Process if you have this 4G MNVR product



1. Account name: Located on your black box
2. Password: 000000
3. Enter Code
4. Login

Make sure that Flash Web PC Settings are set "allowed"

We are here to answer any questions you may have. BEFORE CALLING FOR TECH SUPPORT: REVIEW MANUALS ON THE "EXTRA TAB" ON OUR PRODUCT PAGE.

1. BE PARKED OR AVAILABLE TO NAVIGATE THROUGH MNVR BLACK BOX MENU'S
2. REVIEW ALL INSTRUCTIONAL VIDEOS
3. REVIEW ALL MANUALS

MNVR Tech Support: Call, Text, or Email Falcon Electronics office 9 am - 5pm CST 972.600.1320 falconeydashcams@gmail.com