

THE KANGAROO PRO



The Kangaroo Pro is designed to hold (1) LCD Monitor on the VESA compatible bracket and your keyboard and mouse on the main work surface. Your Kangaroo Pro is shipped in the down position with the Main Brake tightened. The Kangaroo Pro has (2) springs that assist in raising your unit to the standing position and work best when your monitor and keyboard are in place. This reduces the amount of pressure needed to lower the unit. **Always push down with both hands on the horizontal rear rail when lowering the main work surface.**

Maximum Size LCD Monitors 30" and Weight of 15 lbs
Any questions about The Kangaroo Pro
Contact us at info@ergodesktop.com or 866-232-7988

VESA compatible Bracket
Instructions Included

HOW TO USE THE KANGAROO PRO

To raise the Kangaroo Pro, loosen the main brake(C) and lift the main work surface on the sides(D & D).

To raise the monitor, loosen the monitor brake(A), and raise the monitor with two hands. Once the desired height is reached, tighten the monitor brake.

To lower the Kangaroo Pro, loosen the main brake(C) and lean into the unit using your upper body weight pushing down with both hands on the horizontal bar at the rear of the main horizontal work surface (B & B).

To Lower the monitor, loosen the monitor brake(A) and push down with one or two hands on the monitor.

A. Monitor Brake


B. Work Surface Rail

C. Main Brake

D. Main Work Surface



THE STABILIZATION LEG

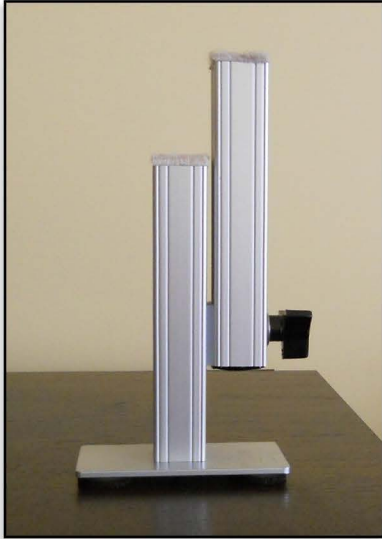

Your adjustable height desk unit comes with an adjustable leg that can be used to give you maximum stability when you are using “The Kangaroo” in the standing position.


Raise The Kangaroo work surface to your desired standing height and tighten the work surface brake.

Place the adjustable leg under the work surface and loosen the adjustable leg brake. Only loosen the brake by a turn or two, to much and the brake will disengage from the slot.

Extend the adjustable leg until it engages the bottom of the work surface and then tighten the adjustable leg brake.

The leg is shipped with the **extension section** installed to give you additional height adjustment. If this is too tall for your application, simply **unscrew the extension section**.

- A** Extension Selection
- B** screws into here

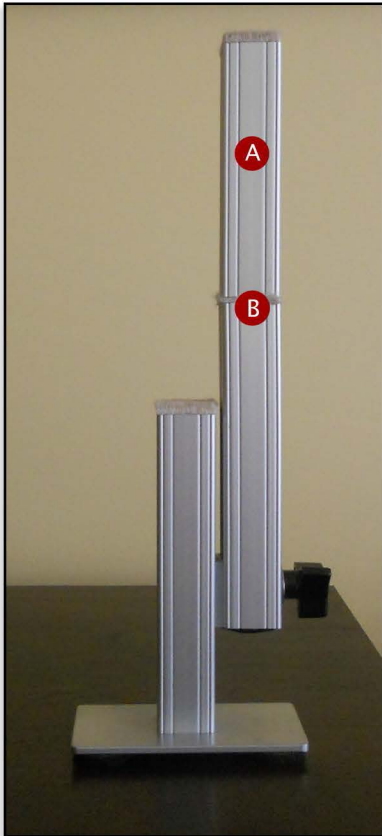

ALWAYS REMOVE LEG BRACE BEFORE LOWERING THE WORK SURFACE.

