

# HANDHELD REMOTE

with Wall Mount Bracket

Model: LUM-B34XTS-HRT



Lumilum Lichttechnik

## INSTRUCTION MANUAL



CE RoHS IP67


### PRODUCT INFORMATION

Lumilum® Handheld Remote has 4 different zones (Buttons 1 & 4). The Handheld Remote Controller can save up to 3 Colors or 3 Modes at a time into corresponding buttons (S1, S2, S3) for each zone. You can choose any color on the color wheel as a color option.


### SPECIFICATIONS

Model Number:	Operation Voltage	Operation Frequency	DIMENSIONS ø/h (mm)	Remarks
LUM-B34XTS-HRT	4.5VDC	434MHz/868MHz	48x140x16	load 3pcs 7 AAA (1.5V) batteries

### PRODUCT MEASUREMENTS

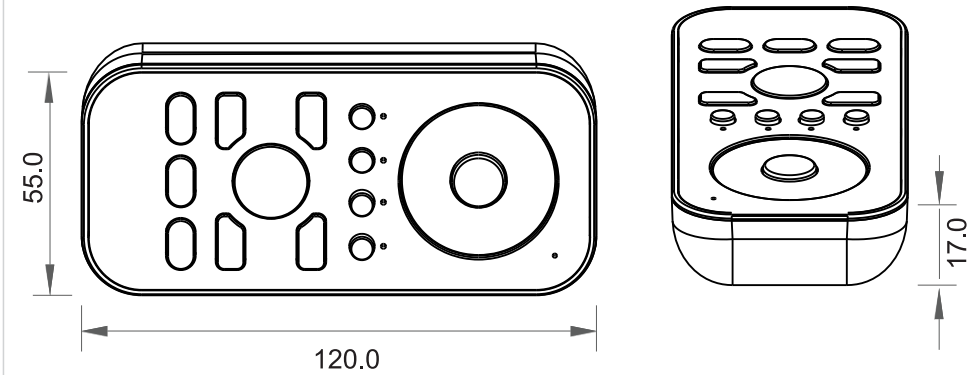

### DESCRIPTION OF BUTTONS

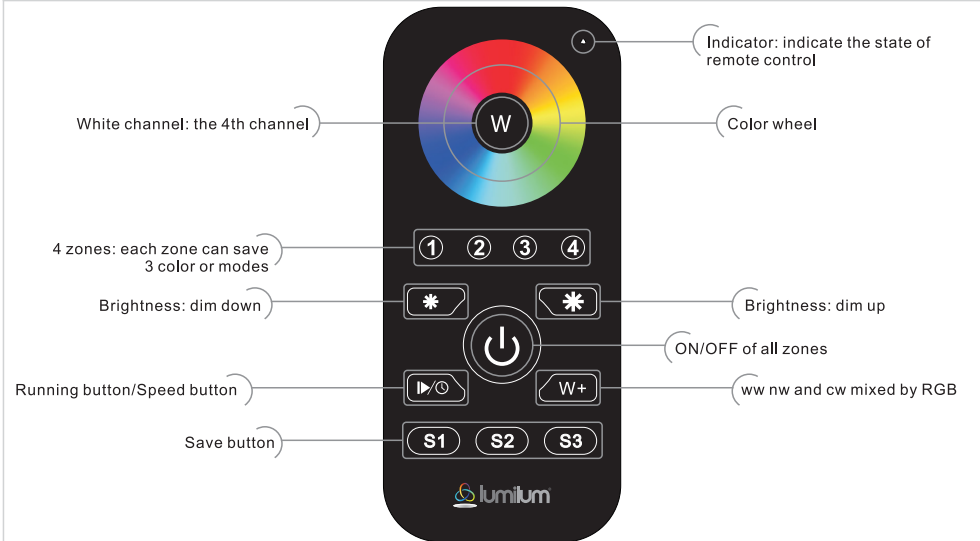

### INSTRUCTIONS: SETUP

After wiring the RF to DMX Module and Controller, use the Installation Diagram as reference and follow these steps:


1. Synchronize Remote (B34XTS-HRT) with RF Module
2. Quick Press and Release the Sync Button (button on the right) and wait until Ready-Light turns off.
3. Turn ON the Handheld Remote, touch the Zone number and the Color Wheel.
4. RESET: Hold down the Sync Button for 10 Seconds.

## OPERATION



**Note 2:** Each Handheld remote can control 4 zones (areas) receivers, each area can be learned as many receivers as we can.

Each receiver maximally can be controlled by 8 different remote controllers.

### Color Wheel


Choose zone number ① ② ③ ④, for example, ① and ③, then touch , choose the color you want, zone 1 and 3 will indicate corresponding color as we touched.


### Brightness Up & Down Button

Short/Long press button  to dim down brightness of RGB channels, Short/long press  button dim up RGB channels.

"W" channel is separated from RGB channels, so we can only long press button to dimming "W" channel.



### Dynamic Change Mode & Speed Button

a. Short press , mode will run. Press it once, it runs one mode. Press button again, it stops, then press one more time, it will enter next mode. There are total 10 build-in modes.

b. Long press  when mode is running, the long press will speed up the color movement

To slow down the color movement long press the button again.

### Save and Recall Button

- a. Save color: select zones from ① ② ③ ④ → select a color from  → long press one save button from S1,S2,S3 for 2-3 second → LED lighting flash twice indicate save successful
- b. Save Dynamic Change Mode: Select zones from ① ② ③ ④ → Select a Dynamic Change Mode from:  → Only press one save button from S1,S2,S3 for 2-3 second → LED lighting flash twice indicate save successful
- c. Recall: select zone button which we want recall from 1-4, then short press save button S1,S2,S3.