



Mini USB Docking station User's Manual

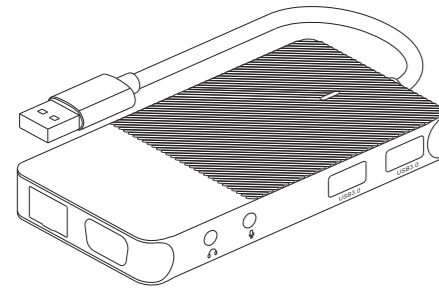

1.20.01.00058

Safety Instructions:

- Always read the safety instructions carefully. Keep this User's Manual for future reference. Keep this equipment away from humidity.
- If any of the following situation arises, get the equipment checked by a service technician:
 - The equipment has been exposed to moisture.
 - The equipment has been dropped and damaged.
 - The equipment has obvious sign of breakage.
 - The equipment has not been working well or you cannot get it work according to User's Manual.
- Copyright Statement**
No part of this publication may be reproduced in any form by any means without the prior written permission. Other trademarks or brand names mentioned herein are trademarks or registered trademarks of their respective companies.
- Disclaimer**
Information in this document is subject to change without notice. The manufacturer does not make any representations or warranties (implied or otherwise) regarding the accuracy and completeness of this document and shall in no event be liable for any loss of profit or any commercial damage. Including but not limited to special, incidental consequential, or other damage.



Product introduction:

Portable Mini USB Docking Station, support triple display, dual card. Dual USB extend. Dual audio jack, wire network to the RJ45. Dc external power port. It can connect to any laptop through line end USB plug. Multi-function as one of the general equipment, it's providing a fully-compatible docking solution, a good partner with work and travel for you

Product features:


- Line end cable A Up_stream port transmission rate 5Gbps
- HDMI 2 outlet: 2048*1152
- HDMI 1 outlet: 2048*1152 (without sound)
- VGA port 1920*1080 (without sound)
- Multi displays can to setting mirror, extend, main display mode
- LAN port supports 10/100/1000Mbps.
- Card slot support SD card and TF card.
- USB3.1 Type C female port
TO 10 external DC power (5V2A) can through USB cable when the USB port is plug to the high-power device,
- USB3.0 Type A downstream transmission rate 5Gbps
- Support microphone and earphone input/output
- Operating system: Window Mac os Ubuntu Chrome os

Note: Using VGA monitor when on Mac os. at first connect the VGA monitor second turn on power both

Package Contents:

Mini Docking station	x1
USB Power cable	x1
User's manual	x1

Application scenario:

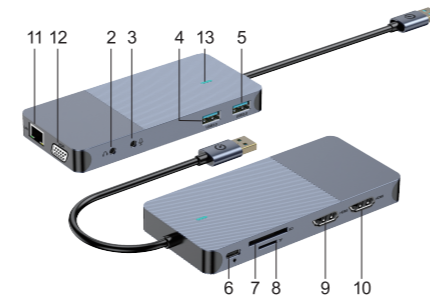


- End line cable plug A to laptop.
- 3.5" Earphone.
- 3.5" Microphone.
- connect USB device. Compatible with USB3.0/2.0/1.1
- connect USB device. Compatible with USB3.0/2.0/1.1
- DC in. through A2C cable connect 5V2A external power supply
- SD card memory slot
- TF card memory slot
- connect to HDMI monitor through HDMI cable
- connect to HDMI monitor through HDMI cable
- RJ45, Wired network access.
- connect to VGA monitor through VGA cab
- power indicator

Driver installation:


<https://www.displaylink.com/downloads> to download the latest driver for better compatibility

Windows installation:


Set 1: open DisplayLink USB Graphics Software for Windows .exe file.

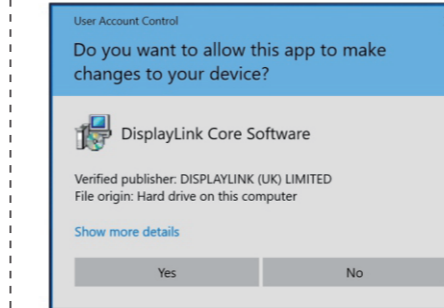


Set 2: Click Yes. Automatically detects the installation environment

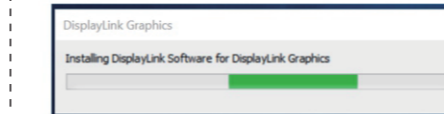

Set 3: Click Install.

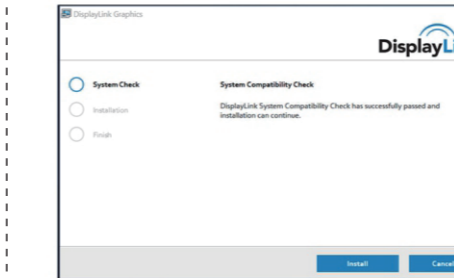

Set 4: waiting for Finish installation.

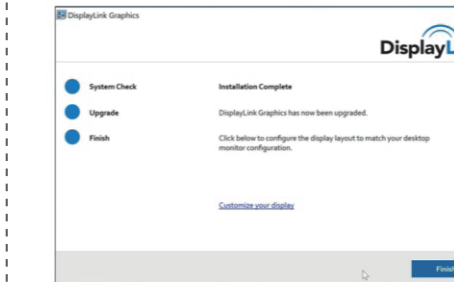


MAC OS installation:


Set 1: Open DisplayLink USB Graphics Software for macOS .dmg file.
Set 2: Click DisplayLink Software installer.pkg




Set 3: continue.....

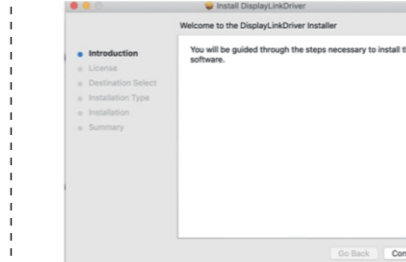

Set 4: continue.....

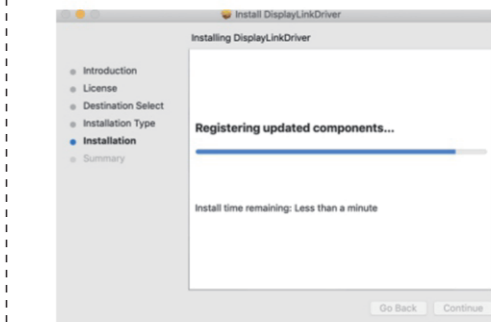

Set 5: Finish over. restart

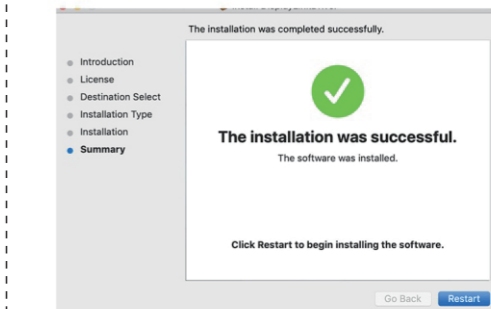

D3908说明书

尺寸:560*106mm

折叠后尺寸:70*106mm 虚线为折痕,印刷时需删除