


ZOOZ™
bright ideas

DOUBLE SWITCH
ZEN30 2.0



www.getzooz.com
ask@getzooz.com

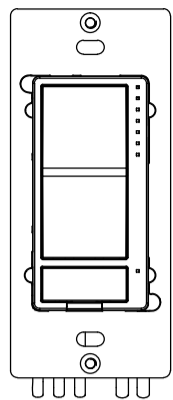

FIRMWARE VERSION 2.01

FEATURES

- Manual or Z-Wave control of 2 separate loads (dimmer + relay)
- Perfect replacement for a fan / light combo (neutral wire required)
- Scene control for multi-tap scenarios on select hubs
- Quick and easy pigtail wire installation (single pole only)
- 4-color LED indicator and air-gap switch for added safety
- Packed with advanced dimming features including ramp rate control, custom on brightness level, and double tap to full brightness
- Remembers and restores on/off status after power failure
- Built-in Z-Wave Plus signal repeater to extend network range
- S2 security protocol and 500 Z-Wave chip

SPECIFICATIONS

- Model Number: ZEN30
- Z-Wave Signal Frequency: 908.42 MHz
- Power: 120 VAC, 60 Hz
- **Dimmer Max Load:** 75 W LED, 250 W incandescent; **DON'T use with tube lights, DC powered fixtures, or chandeliers**
- **Relay Max Load:** 15 A (1/2 HP)
- Operating Temperature: 32-104° F (0-40° C)
- Installation and Use: Indoor only

CAUTION

This is an electrical device - please use caution when installing and operating the switch. Remote control of appliances may result in unintentional or automated activation of power. Do not use this Z-Wave device to control electric heaters or other appliances which produce the risk of fire, burns, or electrical shock when unattended. To reduce risk of overheating and possible damage to other equipment, do not install the **dimmer** part to control a receptacle; a motor-operated appliance; a fluorescent lighting fixture; or a transformer-supplied fixture.

BEFORE YOU INSTALL

This switch is intended for installation in accordance with the National Electric Code and local regulations. It is recommended that a licensed electrician perform this installation.

WIRING: READ IT!

- CHECK THE LOAD:** Lights only for dimmer (75W for LED's, 250W for incandescent), 15 A resistive load / 1/2 HP motor for relay
- POWER OFF:** Turn the circuit power off in the breaker panel before you start. If installing in a multi-switch box with multiple circuits, turn power off at all of the circuits.
- CHECK THE WIRES:** Mark load 1 (most often black), load 2 (most often black), line (most often black), neutral (most often white), and ground (most often bare). 14 AWG wires only! **Don't rely exclusively on color code or your multimeter to identify the wires!**

NOT SURE WHAT YOU'RE SEEING?
WE'LL HELP: SUPPORT.GETZOOZ.COM

- REMOVE THE OLD SWITCH:** Disconnect the wires and label them.
- CONNECT THE Z-WAVE SWITCH:** Use electrical pliers and the included wire nuts to connect pigtail wires with line, load, and neutral EXACTLY like in the appropriate diagram. **Always connect ground!**

WIRING TIPS

TAKE PICTURES

Before you disconnect any wires, document your set-up and send us images of your existing installation so we can help if needed.

GATHER YOUR TOOLS


Use appropriate electrical tools when cutting, prepping, and stripping electrical wires. If you don't have the necessary tools to perform the installation or are not sure which tools to use or how, please hire an electrician to complete the installation for you.

SAFETY FIRST

Follow the National Electrical Code and your local safety regulations when performing the installation, including (but not limited to), separating low voltage and high voltage wires, grounding the switches, and capping any unused or exposed wires.

USE THIS DIAGRAM FOR BATHROOM EXHAUST FAN / LIGHT, CEILING FAN / LIGHT, OR VENTILATION FANS

ALWAYS CONNECT GROUND

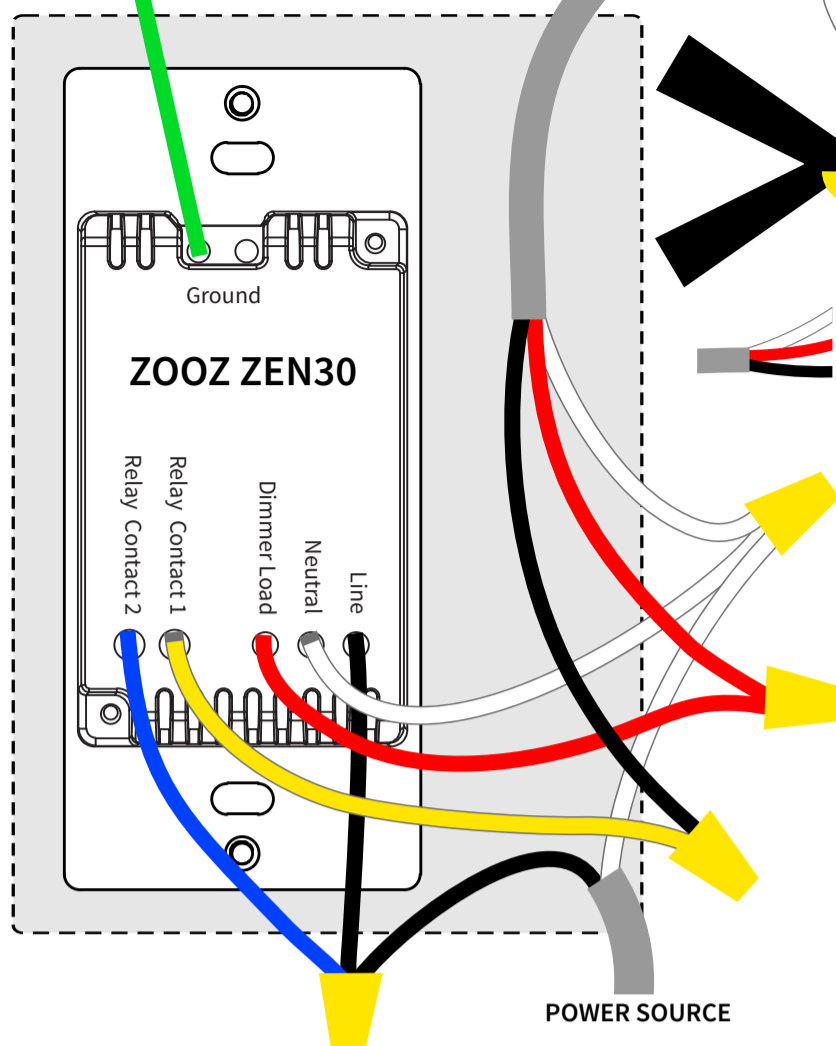

ZOOZ ZEN30 FAN/LIGHT WIRING DIAGRAM

- POWER OFF:** Cut power to circuits for all switches in the box.
- PREP WIRES:** Strip at 1/2"-5/8" and straighten.
- CONNECT:** Use electrical pliers to splice wires and wire nuts to cap them. Add electrical tape if needed. **Don't leave bare wires out.**
- ARRANGE:** Carefully arrange wires in the box to make room for the switch.
- COMPLETE:** Screw the switch to the electrical box and install the wall plate. Restore power and test the switch.


NEED HELP? Don't experiment!
ask@getzooz.com / www.support.getzooz.com

STOP!

Wire colors and romex layout are for illustration only. You should not follow the colors and positioning in the illustration blindly. Always identify all wires prior to installing Zooz switches and make sure you can match the diagrams to your set-up exactly. Don't experiment or attempt a "trial-and-error" installation for your own safety.

ZOOZ ZEN30 2 LOAD WIRING DIAGRAM

ALWAYS CONNECT GROUND

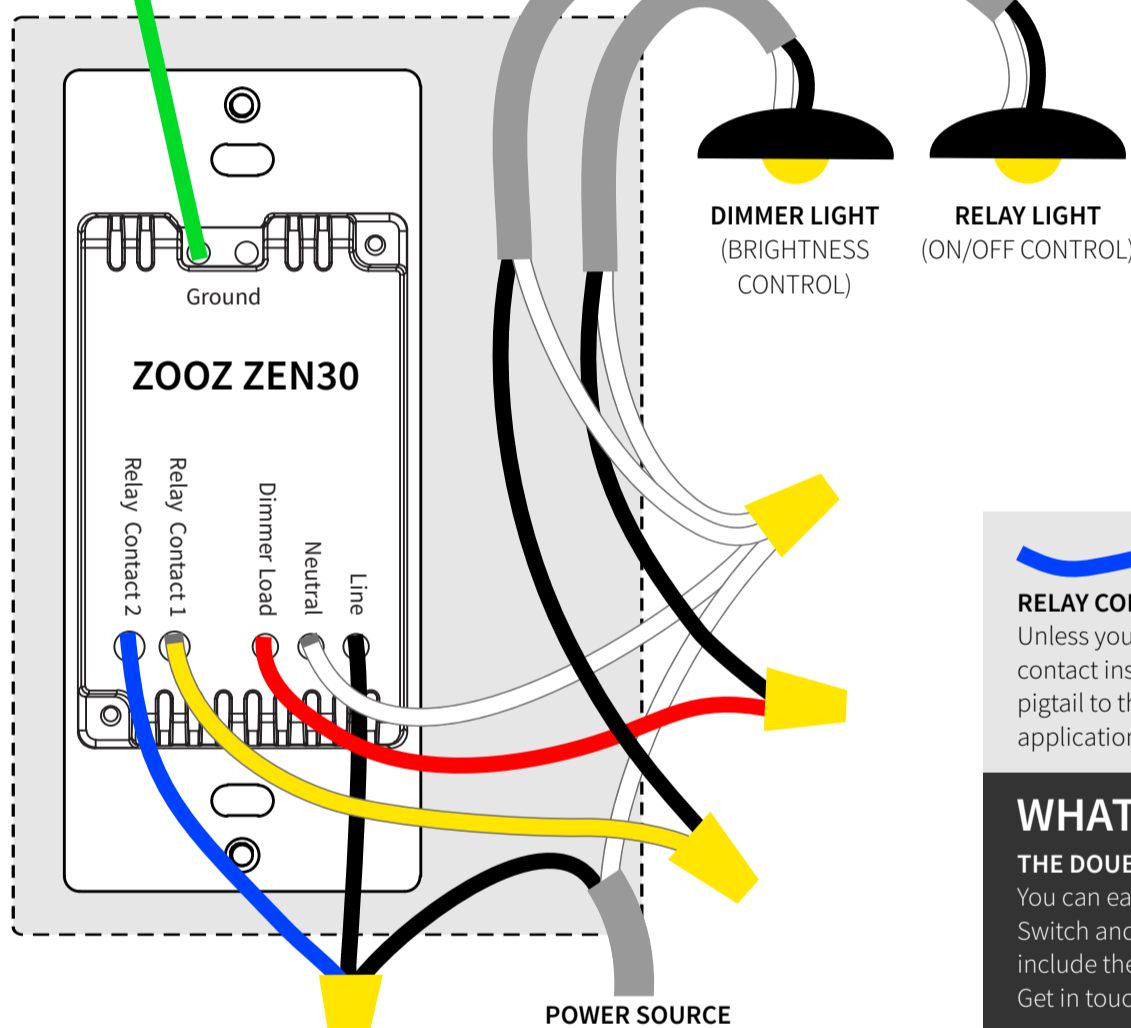

- POWER OFF:** Cut power to circuits for all switches in the box.
- PREP WIRES:** Strip at 1/2"-5/8" and straighten.
- CONNECT:** Use electrical pliers to splice wires and wire nuts to cap them. Add electrical tape if needed. **Don't leave bare wires out.**
- ARRANGE:** Carefully arrange wires in the box to make room for the switch.
- COMPLETE:** Screw the switch to the electrical box and install the wall plate. Restore power and test the switch.

WHAT IS THIS?

RELAY CONTACT 2: Unless you're using the relay part of the Double Switch in a dry contact installation, always connect the blue Relay Contact 2 pigtail to the power source (line). Ask us about **dry contact** applications if you're not sure what we mean!

WHAT ABOUT 3-WAY?

THE DOUBLE SWITCH IS SINGLE POLE ONLY BUT: You can easily create a virtual 3-way or 4-way using the Double Switch and any other Zooz Z-Wave switch/dimmer. The benefits include the ability to dim and trigger scenes from all locations. Get in touch for detailed wiring and programming instructions!

ZOOZ ZEN30 NO LOAD WIRING DIAGRAM

- POWER OFF:** Cut power to circuits for all switches in the box.
- PREP WIRES:** Strip at 1/2"-5/8" and straighten.
- CONNECT:** Use electrical pliers to splice wires and wire nuts to cap them. Add electrical tape if needed. **Don't leave bare wires out.**
- ARRANGE:** Carefully arrange wires in the box to make room for the switch.
- COMPLETE:** Screw the switch to the electrical box and install the wall plate. Restore power and test the switch.




USE WITH SMART BULBS!

DON'T CONNECT the switch directly to your smart bulb. Ask us for custom wiring and programming instructions for on/off and brightness control of your smart bulb!

DON'T SEE YOUR SET-UP?
Request custom instructions:
ask@getzooz.com

REMOTE CONTROL & SCENES
18 scenes available for custom multi-tap scenarios. Even if your hub doesn't support scenes, create simple "if... then..." rules for single taps on each button!

ALWAYS CONNECT GROUND

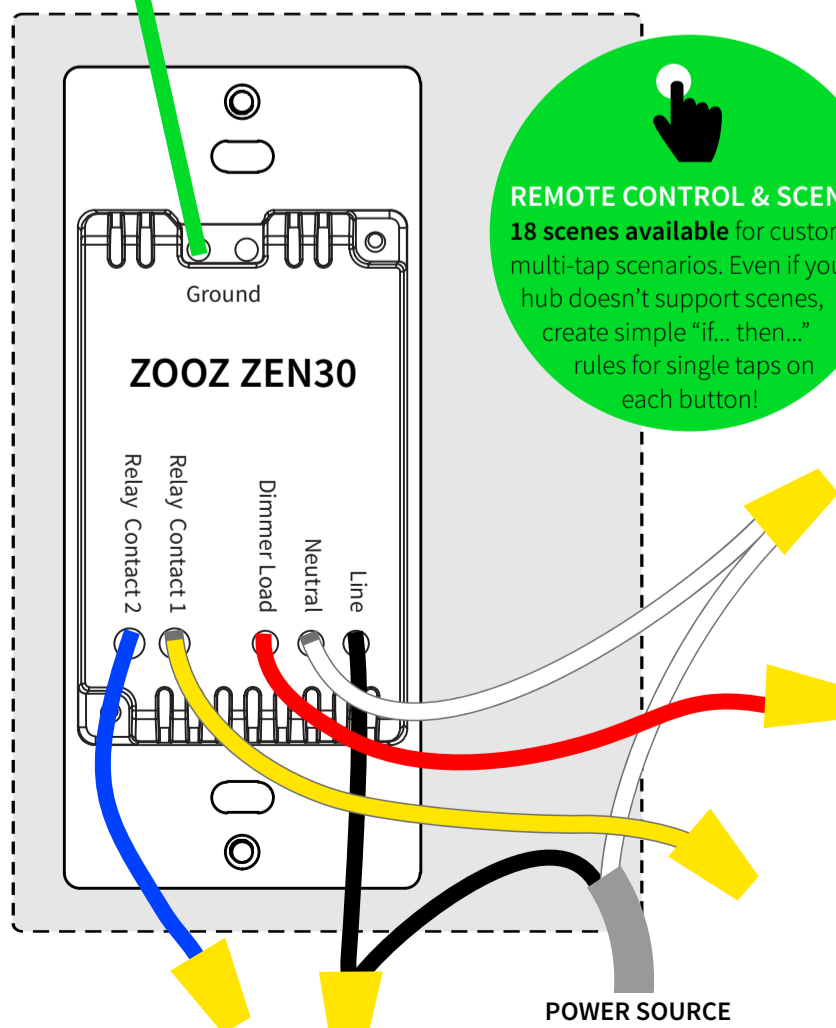


TEST THE SWITCH

The LED indicator should light up as soon as you turn the power back on if the switch (light) is OFF. Tap the upper paddle of the dimmer for ON and lower paddle for OFF. **If the test fails, please check that:**

- power is fully restored to the circuit
- wiring matches the instructions **exactly**
- the **type of load** is approved and within the specs of this switch

MANUAL CONTROL

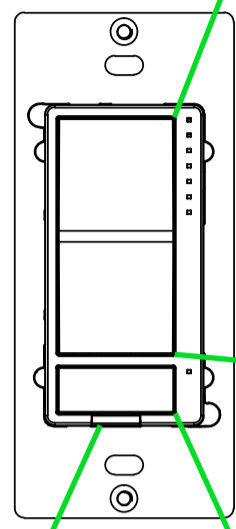

AIR-GAP SWITCH

Pull it out when changing bulbs to cut off power to the switch for your safety and shock prevention.

UPPER PADDLE

1 TAP: turn the light on to the last brightness level (or custom brightness: see Parameter 23). It takes around a second for the dimmer to reach full brightness. See Parameters 13 and 22 to change the ramp rate.

2 x TAP: go to full (or custom) brightness (see Parameters 17 and 18 to customize).

3 x TAP: inclusion mode active for 30 seconds.

6 x TAP: change LED indicator mode for dimmer (see Parameter 1 for details).

PRESS AND HOLD: add brightness.

LOWER PADDLE

1 TAP: turn the light off.

3 x TAP: exclusion mode active for 30 seconds.

4 x TAP'N'HOLD for 10 seconds: disable manual control for the dimmer paddles.

PRESS AND HOLD: reduce brightness.

RELAY BUTTON

1 TAP: turn the load on or off (change state).

6 x TAP: change LED indicator mode for relay (see Parameter 2 for details).


4 x TAP'N'HOLD for 10 seconds: disable manual control for the relay button.

Z-WAVE CONTROL



1. ADD DEVICE to your hub

Initiate inclusion (pairing) in the app (or web interface). Not sure how? Get step-by-step instructions for adding the switch to **SmartThings, Vera, Wink** and other hubs here: www.support.getzooz.com



2. Finalize inclusion at the switch.

TAP 3 TIMES QUICKLY

The LED indicators will blink to signal communication and remain on for 2 seconds to confirm inclusion.

NEED SOME HELP? ask@getzooz.com

TROUBLESHOOTING

The switch won't add to your system? Try this:

1. Initiate **EXCLUSION** and tap the **lower** paddle 3 times quickly.
2. Tap the upper paddle **4-5 times quickly** when adding it.
3. Bring the gateway controller (hub) **closer** to the switch, it may be out of range.
4. Get troubleshooting tips for your hub at www.support.getzooz.com

EXCLUSION (REMOVING / UNPAIRING DEVICE)

1. Bring your Z-Wave gateway (hub) close to the switch if possible
2. Put the Z-Wave hub into **exclusion mode** (not sure how to do that? ask@getzooz.com)
3. Tap the **lower paddle** on the dimmer **3 times quickly**
4. Your hub will confirm exclusion and the device will disappear from your controller's device list

FACTORY RESET

If your primary controller is missing or inoperable, you may need to reset the device to factory settings. To complete the reset process manually, **press and hold the lower paddle** on the dimmer for **at least 15 seconds** until the LED indicators start flashing, then **release**. Then immediately **press and hold the upper paddle** on the dimmer for **at least 15 seconds**. The LED indicators will flash again to confirm successful reset.

NOTE: All previously recorded activity and custom settings will be erased from the device's memory.

WARNING

- This product should be installed indoors upon completion of any building renovations.
- Prior to installation, the device should be stored in a dry, dust-and-mold-proof place.
- Do not install the switch in a place with direct sun exposure, high temperature, or humidity.
- Keep away from chemicals, water, and dust.
- Ensure the device is never close to any heat source or open flame to prevent fire.
- Ensure the device is connected to an electric power source that does not exceed the maximum load power.
- No part of the device may be replaced or repaired by the user.



This product can be included and operated in any Z-Wave network with other Z-Wave certified devices from other manufacturers and/or other applications. All non-battery operated nodes within the network will act as repeaters regardless of vendor to increase reliability of the network. This product features the latest Security 2 (S2) framework to remove smart home network hacking risks. This device is equipped with a unique authentication code for trusted wireless communication. **This is an ETL certified device.** ETL, just like UL, is a Nationally Recognized Testing Laboratory. The ETL mark is proof of product compliance with North American safety standards.

ADVANCED SETTINGS

Please refer to your controller's user guide for advanced programming instructions as they are a little different for every software.

Not sure where to start? Go to www.support.getzooz.com for detailed instructions on how to change the settings on SmartThings, Vera, and more. Or just email us: ask@getzooz.com

ASSOCIATION

The Double Switch supports Group 1 with up to 1 devices for lifeline communication. The dimmer supports Group 2 with up to 5 devices and will send BASIC_SET report to other devices in Group 2 to communicate status changes. The relay supports Group 3 with up to 5 devices and will send BASIC_SET report to other devices in Group 3 if its status changes.

CUSTOMIZE YOUR SWITCH

LED Indicator Mode for Dimmer

Parameter 1: Choose if you want the LED indicator to turn on when the switch (light) is on or off, or if you want it to remain on or off at all times. This setting is for the top status indicator only.

Values: 0 – LED indicator is on when switch is off, LED indicator is off when switch is on (default); 1 – LED indicator is on when switch is on, LED indicator is off when switch is off; 2 – LED indicator is always off and LED's don't indicate brightness level during dimming; 3 – LED indicator is always on.

Size: 1 byte dec. **OR:**

6 x TAP UPPER PADDLE to change the LED mode.

LED Indicator Control for Relay

Parameter 2: Choose if you want the LED indicator to turn on when the relay is on or off, or if you want it to remain on or off at all times

Values: 0 – LED indicator is on when relay is off, LED indicator is off when relay is on (default); 1 – LED indicator is on when relay is on, LED indicator is off when relay is off; 2 – LED indicator is always off; 3 – LED indicator is always on

Size: 1 byte dec. **OR:**

6 x TAP RELAY BUTTON to change the LED mode.

LED Indicator Color for Dimmer

Parameter 3: Choose the color of the LED indicators for the dimmer.

Values: 0 – white (default); 1 – blue; 2 – green; 3 – red.

Size: 1 byte dec.

LED Indicator Color for Relay

Parameter 4: Choose the color of the LED indicator for the relay.

Values: 0 – white (default); 1 – blue; 2 – green; 3 – red.

Size: 1 byte dec.

On Off Status After Power Failure

Parameter 12: Set the on/off status of the device after power failure.

Values: 0 – dimmer and relay forced to off (regardless of state prior to power outage);

1 – dimmer forced to off, relay forced to on;

2 – dimmer forced to on, relay forced to off;

3 – remembers and restores on/off status for dimmer and relay after power failure (default);

4 – remembers and restores on/off status for dimmer, relay forced to on;

5 – remembers and restores on/off status for dimmer, relay forced to off;

6 – dimmer forced to on, remembers and restores on/off status for relay;

7 – dimmer forced to off, remembers and restores on/off status for relay;

8 – dimmer and relay forced to on.

Size: 1 byte dec.

Ramp Rate Control for Dimmer

Parameter 13: Adjust the ramp rate for the dimmer (fade-in / fade-out effect for on/off operation). Values correspond to the number of seconds it takes for the dimmer to reach full brightness or turn off when operated manually.


Values: 0 – instant on/off; 1 – 99 (seconds). Default: 1.

Size: 1 byte dec.

Size: 1 byte dec.

THERE'S MORE!

Scan the QR code with your camera to access all of the advanced settings available for the ZEN30 Double Switch or go to www.support.getzooz.com for a full list of parameters.



SCAN FOR QUICK SET-UP!

Choose your hub and scan the QR code with your phone's camera. Then click on the link to access step-by-step pairing and programming instructions for your Double Switch.

HOW TO ADD IT TO MY HUB?



SmartThings



Hubitat



Vera



Wink

HOW TO ACCESS SETTINGS?



SmartThings



Hubitat



Vera

Unfortunately, Wink does not give users access to the advanced settings for any Z-Wave devices at the moment so you won't be able to adjust any parameters if you're using Wink.

Get more tutorials and helpful tips at www.support.getzooz.com

QUESTIONS?
ask@getzooz.com

This device requires the following **command classes** to be supported and recognized by your Z-Wave controller:

COMMAND_CLASS_ZWAVEPLUS_INFO
COMMAND_CLASS_SWITCH_MULTILEVEL
COMMAND_CLASS_SWITCH_BINARY
COMMAND_CLASS_ASSOCIATION
COMMAND_CLASS_MULTI_CHANNEL_ASSOCIATION
COMMAND_CLASS_ASSOCIATION_GRP_INFO
COMMAND_CLASS_TRANSPORT_SERVICE
COMMAND_CLASS_VERSION
COMMAND_CLASS_MANUFACTURER_SPECIFIC
COMMAND_CLASS_DEVICE_RESET_LOCALLY
COMMAND_CLASS_POWERLEVEL
COMMAND_CLASS_CONFIGURATION
COMMAND_CLASS_CENTRAL_SCENE
COMMAND_CLASS_MULTI_CHANNEL
COMMAND_CLASS_SECURITY_2
COMMAND_CLASS_SUPERVISION
COMMAND_CLASS_FIRMWARE_UPDATE_MD

WARRANTY

This product is covered under a 12-month limited warranty. To read the full warranty policy or file a warranty claim, please go to www.getzooz.com/warranty

IN NO EVENT SHALL ZOOZ OR ITS SUBSIDIARIES AND AFFILIATES BE LIABLE FOR ANY INDIRECT, INCIDENTAL, PUNITIVE, SPECIAL, OR CONSEQUENTIAL DAMAGES, OR DAMAGES FOR LOSS OF PROFITS, REVENUE, OR USE INCURRED BY CUSTOMER OR ANY THIRD PARTY, WHETHER IN AN ACTION IN CONTRACT, OR OTHERWISE EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. ZOOZ'S LIABILITY AND CUSTOMER'S EXCLUSIVE REMEDY FOR ANY CAUSE OF ACTION ARISING IN CONNECTION WITH THIS AGREEMENT OR THE SALE OR USE OF THE PRODUCTS, WHETHER BASED ON NEGLIGENCE, STRICT LIABILITY, BREACH OF WARRANTY, BREACH OF AGREEMENT, OR BREACH OF CONTRACT, IS EXPRESSLY LIMITED TO, AT ZOOZ'S OPTION, REPLACEMENT OF, OR REPAIRMENT OF THE PURCHASE PRICE FOR THAT PORTION OF PRODUCTS WITH RESPECT TO WHICH DAMAGES ARE CLAIMED. ALL CLAIMS OF ANY KIND ARISING IN CONNECTION WITH THIS AGREEMENT OR THE SALE OR USE OF PRODUCTS SHALL BE DEEMED WAIVED UNLESS MADE IN WRITING WITHIN THIRTY (30) DAYS FROM ZOOZ'S DELIVERY, OR THE DATE FIXED FOR DELIVERY IN THE EVENT OF NONDELIVERY.

FCC NOTE
THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT. STORE INDOORS WHEN NOT IN USE. SUITABLE FOR DRY LOCATIONS ONLY. DO NOT IMMERSE IN WATER. NOT FOR USE WHERE DIRECTLY EXPOSED TO WATER. This device complies with Part 15 of the FCC Rules. Operation is subject to the following conditions:
1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used according to instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in any given installation. If this equipment causes harmful interference to radio or television reception, the user may try to correct the interference by taking one or more of the following measures:
- Reorient or relocate receiving antenna
- Increase the separation between equipment and receiver
- Connect equipment into a separate outlet/circuit that does not share the same outlet/circuit
- Consult the dealer or an experienced radio/TV technician for additional assistance

All brand names displayed are trademarks of their respective holders.
© Zooz 2020