


OPPSK

# Rechargeable Par Light

## User Manual

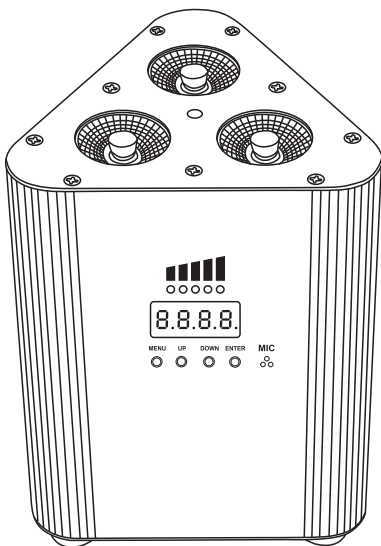

# 1. Before You Begin

## **What In the Box :**

- 1 x Rechargeable Par Light
- 1 x Adapter
- 1 x IR Remote Controller
- 1 x User Manual

## **UnPacking Instructions:**

Carefully unpack the product immediately and check the container to make sure all the parts are in the package and are in good condition.

## **Claims :**

If the box or the contents (products and accessories) appear damaged from shipping, or show signs of mishandling, notify the carrier immediately, and contact Amazon customer support and request them for the new replacement .

Amazon customer support team sure will definitely help you with this.

You may contact Amazon customer support team on the below link:

<https://www.amazon.com/gp/help/customer/contact-us>

If your order is urgent, here are Amazon customer service phone numbers as well:

U.S. and Canada: 1-866-216-1072

If no response from Amazon, you can contact seller customer service directly:

**[hyt-amz-sale@outlook.com](mailto:hyt-amz-sale@outlook.com)**

### **Disclaimer:**

We believe that the information contained in this manual is accurate in all respects. However, we assume no responsibility and specifically disclaim any and all liability to any party for any loss, damage or disruption caused by any errors or omissions in this document, whether such errors or

omissions result from negligence, accident or any other cause. we reserves the right to revise the content of this document without any obligation to notify any person or company of such revision, however, we has no obligation to make, and does not commit to make, any such revisions.

### **Safety Notes:**

Please read the following Safety Notes carefully before working with the product. The Notes include important safety information about installation, usage and maintenance.

- Always connect the product to a grounded circuit to avoid the risk of electrocution.
- Always disconnect the product from the power source before cleaning or replacing the fuse.
- Avoid direct eye exposure to the light source while the product is on.
- Make sure the powercord is not crimped or damaged.



- Never disconnect the product from power cord by pulling or tugging on the cord.
- If mounting the product overhead, always secure to a fastening device using a safety cable.
- Make sure there are no flammable materials close to the product when operating.
- Do not touch the product's housing when operating because it may be very hot.
- Always make sure that the voltage of the outlet to which you're connecting the product is within the range stated on the decal or rear panel of the product.
- The product is for indoor use only! (IP20) To prevent risk of fire or shock, do not expose the product to rain or moisture.
- Always install the product in a location with adequate ventilation , at least 20in / 50cm from adjacent surfaces.
- Be sure that no ventilation slots on the product's housing are blocked.
- Never carry the product from the power cord

or any moving part. Always use the hanging/mounting bracket.

- The Max ambient temperature ( $T_a$ ) is  $104^{\circ}$  F /  $40^{\circ}$  C. Do not operate the product at higher temperature.
- In the event of a serious operating problem, stop using the product immediately.
- Never try to repair the product. Repairs carried out by unskilled people can lead to damage or malfunction. Please contact the seller customer service.
- To eliminate unnecessary wear and improve its lifespan, during periods of non-use completely disconnect the product from power via breaker or by unplugging it.
- Keep this user manual for future use. If you sell the product to someone else, be sure that they also receive this document.

## 2. Introduction :

### Product Overview & Size

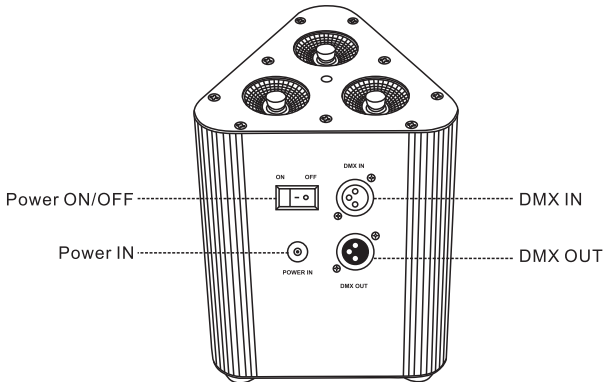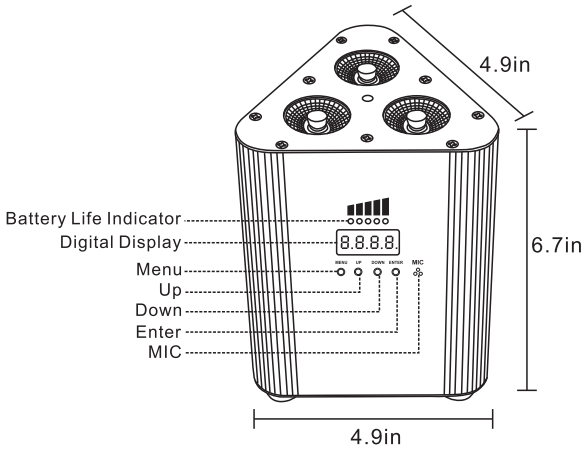

### **3. Setup :**

#### **AC Power:**

The Rechargeable Par Light has an auto-ranging power supply and it can work with an input voltage range of 100 to 240 VAC, 50/60 Hz. To determine the product's power requirements (circuit breaker, power outlet, and wiring), use the current value listed on the label affixed to the product's back panel, or refer to the product's specifications chart. The listed current rating indicates the product's average current draw under normal conditions.


#### **Mounting :**

Before mounting the product, read and follow the safety recommendations indicated in the Safety Notes.



## Orientation :

The Rechargeable Par Light may be mounted in any position; however, make sure adequate ventilation is provided around the product.

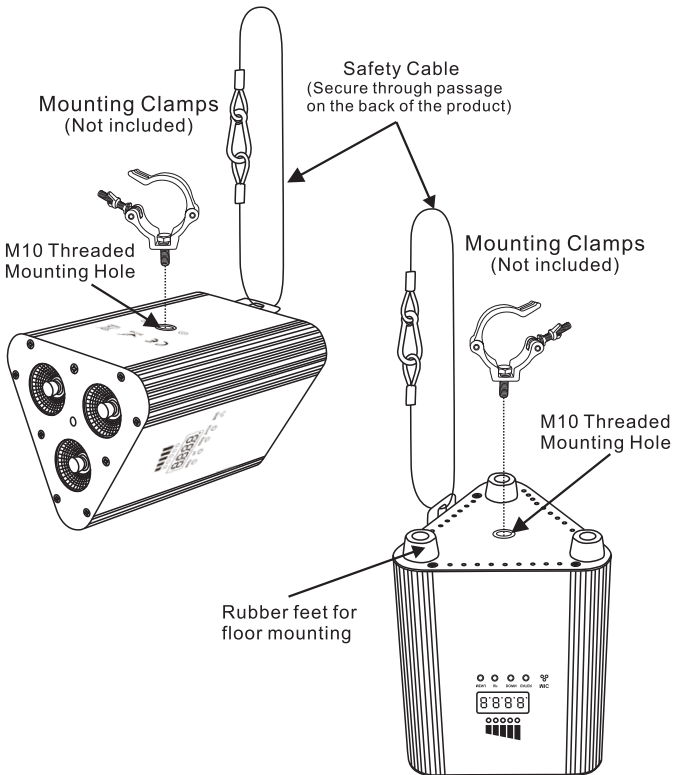

## 4. Operation:

### Control Panel Operation:

To access the control panel functions, use the four buttons located underneath the display.

Button	Function
<MENU>	Select an operation mode or back out of the current menu option
<UP>	Scroll up the list of option or select a higher value
<DOWN>	Scroll down the list of option or select a lower value
<ENTER>	Activate a menu option or a selected value

### Battery Life Indicator

Five level indicator. Recharge when only the red indicator light is still on.



## System Menu

Menu	Options	Functions
A001	A001-A512	DMX Address Setting
Chnd	4CH	4 Channel Mode
	6CH	6 Channel Mode
	8CH	8 Channel Mode
FAIL	bLnd	Blackout when disconnected from DMX controller
	HOLd	Stay on last DMX setting when disconnected from DMX controller
CL01	CL01—CL15	Select 1 of 15 static colors. Adjust the flash speed. “St00” is Off, “St01” is the slowest speed, and “St16” is the fastest.


Aut0	Aut0	All mode. Adjust the speed. "Sp01" is the slowest speed, and "Sp16" is the fastest.
	Aut1	Color change mode. Adjust the speed. "Sp01" is the slowest speed, and "Sp16" is the fastest.
	Aut2	Fade mode. Adjust the speed. "SP01" is the slowest speed, and "SP16" is the fastest.
	Aut3	Hopping mode. Adjust the speed. "SP01" is the slowest speed, and "SP16" is the fastest.
	Aut4	Color change flash mode. Adjust the speed. "SP01" is the slowest speed, and "SP16" is the fastest.

SOU0	SoU0	All mode
	SoU1	Color change mode
	SoU2	Hopping mode
	SoU3	Color change flash mode
NANU	D000-255	Master Dimmer
	R000-255	Red Dimmer
	G000-255	Green Dimmer
	B000-255	Blue Dimmer
	U000-255	White Dimmer
	S000-255	Flash Adjustment
TEST		Color auto test
LED	ON	LED display is always on
	OFF	LED display turns off after 60 seconds
IRCL	ON	IR remote function is activated
	OFF	IR remote function is deactivated.
VER	V2.0	Current software version

## DMX Connection:

Set the product in DMX mode /A001 to control with a DMX controller.

- Connect the product to a suitable power outlet
- Connect a DMX cable from the DMX output of the DMX controller to the DMX input socket on the product.

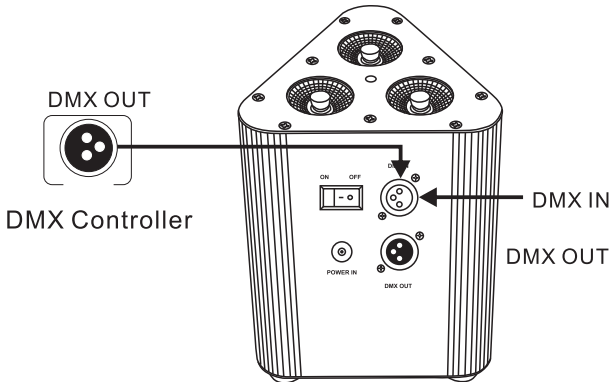

## DMX Channel Modes, Assignments, and Values

### 4-Channel

Channel	Function	Value
CH1	Red Dimmer	0-255
CH2	Green Dimmer	0-255
CH3	Blue Dimmer	0-255
CH4	White Dimmer	0-255

### 6-Channel

Channel	Function	Value
CH1	Master Dimmer	0-255
CH2	ON/OFF	0-9
	Strobe (slow-fast)	10-255
CH3	Red Dimmer	0-255
CH4	Green Dimmer	0-255
CH5	Blue Dimmer	0-255
CH6	White Dimmer	0-255

## 8-Channel

Channel	Function	Value
CH1	Master Dimmer	0-255
CH2	Red Dimmer	0-255
CH3	Green Dimmer	0-255
CH4	Blue Dimmer	0-255
CH5	White Dimmer	0-255
CH6	ON/OFF	0-9
	Strobe (slow-fast)	10-255
CH7	No Light	0-9
	Static Color	10-50
	Hopping Mode	51-100
	Pulse Mode	101-150
	Fade Mode	151-200
	Hopping Sound Active	201-210
	Fade Sound Active	211-220
	Strobe Sound Active	221-230
	Pulse Sound Active	231-240
	Full Function Sound Active	241-255
CH8	Speed (slow-fast)	0-255



# IR-C Remote Operation



## **5. TECHNICAL SPECIFICATIONS:**

- Light Source: 3x4W RGBW 4in1 LED
- Beam Angle: 30°
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Built-in Battery: 11.6v 4400 MA
- Battery Life- R+G+B+W Colors: about 6 hours
- Battery Life-B+G Colors: about 8 hours
- Battery Life-R+W Colors: about 9 hours
- Battery Life-Red/Green/Blue Single Color: about 26 hours
- Battery Charge Time: about 4-5 hours
- LED Par Size: 4.9\*4.9\*6.7inch
- Package Size:7.7\*5.9\*5.7inch / 19.5\*15\*14.5cm
- LED Par Weight: 1.1kg/2.4lb