


RF3405E Wireless (RF) Inertia Transmitter

www.boschsecurity.com



BOSCH
Invented for life

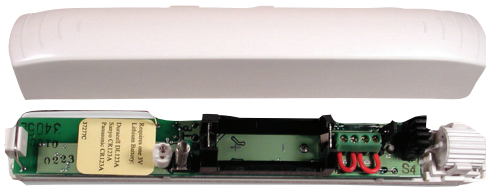

- ▶ Internal magnetic reed switch
- ▶ Supervised external loop
- ▶ Gross or minor attack movement settings
- ▶ Test mode

The RF3405E is a wireless transmitter with an inertia sensor, reed switch, and supervised external contact input. It is used for monitoring doors, windows, or other dry contact devices.

System overview

The RF3405E has an inertia sensor with programmable sensitivity settings. You can set the transmitter to monitor the inertia sensor or external loop. Internal reed switches can also accept a dual EOL resistor supervised dry contact input from an external device. You can enable or disable the reed switch. A cover and wall tamper switch is provided. All transmissions from the RF3405E send battery status information.

Functions

Supervised External Loop

Supervision is provided by transmitting a signal to the receiver every 13 minutes if there is no other activity.

Gross or Minor Attack Movement Settings

Program the minor attack settings to react after four or eight repetitive pulses. If gross attack is enabled, the inertia sensor only reacts to major attack movement. The gross attack movement has four sensitivity settings.

Test Mode

Once the detector is mounted, you can place it in test mode. Separate test modes verify the gross attack or minor attack movement settings. During the testing time, the LED flashes twice each time a magnetic contact changes state or the external contact changes state.

Certifications and approvals

Region	Certification
Europe	CE 1999/5/EC, EN60950: 2000, EN61000-4-2: 1998, EN61000-4-3: 2000, EN300220-1: 1997
Brazil	ANATEL 1164-06-1855

Installation/configuration notes

Mounting Considerations

- The maximum range of the inertia transmitter, in open air, is approximately 300 m (984 ft). Keep this transmitter within 100 m (328 ft) of the receiver to which it is assigned.
- Mounting the inertia transmitter on metal surfaces might reduce its RF range. Mounting it on iron or steel surfaces might affect the operation of the internal magnetic contact.

- Mount the inertia transmitter on the door or window frame and mount the magnet assembly on the moving portion.

Compatibility Information

Receiver	Control Panels
RF3227E	D7240, D7220, D6412, and D4412

Recommended Batteries

The following battery types are recommended for correct operation of your transmitter: Duracell® DL123A, Energizer® EL123AP, Panasonic® CR123A.

Technical specifications

Environmental Considerations

Relative Humidity	0% to 95% non-condensing
Temperature (operating):	-20C to +60C (-4°F to +151°F)

Mechanical Properties

Dimensions

Transmitter:	2.7 cm x 2.4 cm x 16.9cm (1.1 in. x 0.9 in. x 6.7 in.)
Magnet:	1.9 cm x 1.3 cm x 16.9 cm (0.75 in. x 0.5 in. x 2.4 in.)
Supervisory Internal	13 min nominal

Power Requirements

Battery:	One 3 VDC lithium battery
Battery Life	A minimum of 3 years under normal operating conditions with recommended battery types (2 years if using the inertia sensor).

Transmission Characteristics

Frequency:	433.42 MHz
Maximum RF Power	Less than 10 mW

Trademarks

Duracell® is a registered trademark of the Gillette Company, USA, in the United States and/or other countries.

Energizer® is a registered trademark of Eveready Battery Company, Inc.

Panasonic® is a registered trademark of Matsushita Electric Industrial Co., Ltd.

Ordering information

RF3405E Wireless (RF) Inertia Transmitter

Monitors doors and windows via an inertia sensor
Order number **RF3405E**

Represented by:

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com