

## UCD Under Counter Hot Water Dispensers UCD7, UCD12 & UCD47

Suitable for anywhere from a small office to a football arena, these stylish chrome and stainless steel fonts are available with a choice of three powerful boilers.

### Features and Benefits

- Electronically controlled for constant temperature up to 95°C
- Programmable measured water delivery
- Early warning diagnostics with LCD read-out
- Five water level sensors (excludes UCD7)
- Automatic re-circulating mode to prevent under temperature drinks
- Energy saving mode on 12 and 47 litre models

### Installation

Easy to install with font positioned in work surface with boiler sited below.

### Plumbing

Designed for direct connection to a potable cold water supply using the 1.5 metre (3/4" BSP) food quality hose supplied. An isolating valve should be installed between the supply and the machine. Right-hand side water connection and overflow.

### Electrical

To be connected to a 230 volt supply with break capacities as appropriate.

### Construction

Stainless steel case.



Stainless steel heating chamber.



### Technical Data

Model	Power Loading (kW)	Rapid Draw-Off		Hourly Output	
		(Litres)	(Cups)	(Litres)	(Cups)
UCD7 & UCD7/L	3	7	42	28	168
UCD12 & UCD12/L	3	12	72	28	168
UCD47 & UCD47/L	4.5 or 6.7	47	280	42 or 63	252 or 378
UCD47/D	4.5 or 6.7	47	280	42 or 63	252 or 378

Customer Service Tel: 01704 501114

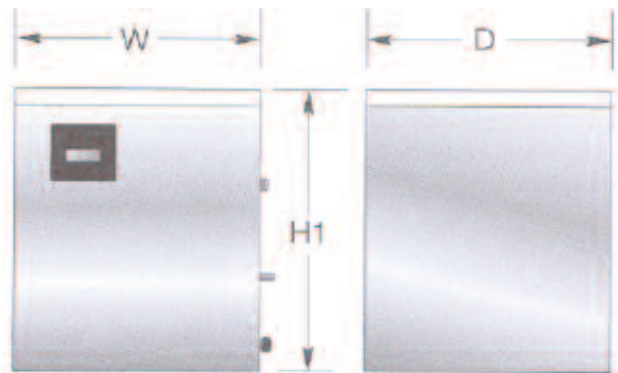

**Dimensions**

Tap Font	Dia (mm)	H3 (mm)	H2 (mm)
Standard	185	132	221
Tall	185	234	323

Model	H1 (mm)	Width (mm)	Depth (mm)
UCD7	502	280	380
UCD12	540	360	415
UCD47	560	465	500

Technical Help & Advice: 01704 502911