

Premium Counter Top High Volume CT6000-9, CT8000-6 & CT8000-9

These 6kW (single phase) and 9kW (three phase) large and stylish boilers will cope with the most demanding situations where large volumes are needed in a short period. All feature twin taps for speedy delivery.

Features and Benefits

- Integral 7 day programmable timer
- Energy saving ECO mode
- Temperature programmable between 80°C - 98°C
- Comprehensive diagnostics system
- Integral stainless steel drip tray included

Installation

Easy to install on a stable worktop.

Plumbing

Designed for direct connection to a potable cold water supply using the 1.5 metre (3/4" BSP) hose supplied. An isolating valve should be installed between the supply and the heater. Rear supply connection and choice of rear or front overflow.

Electrical

The CT8000-6 should be connected to a 230 volt supply with a suitable break capacity of 30 amps.

The CT6000-9 and CT8000-9 are both 9kW and require a 400 volt, 3 phase supply.

Construction

Brushed stainless steel case.
Stainless steel heating chamber.
Low voltage switching.
2 safety cut-outs.

Approvals

WRAS approved.

Technical Data

Model	Power Loading (kW)	Rapid Draw-Off		Hourly Output	
		(Litres)	(Cups)	(Litres)	(Cups)
CT6000-9	9	36	216	85	510
CT8000-6	6	45	270	57	342
CT8000-9	9	50	300	85	510


Customer Service Tel: 01704 501114



WRAS
APPROVED
PRODUCT



PREMIUM COUNTER TOP HIGH VOLUME

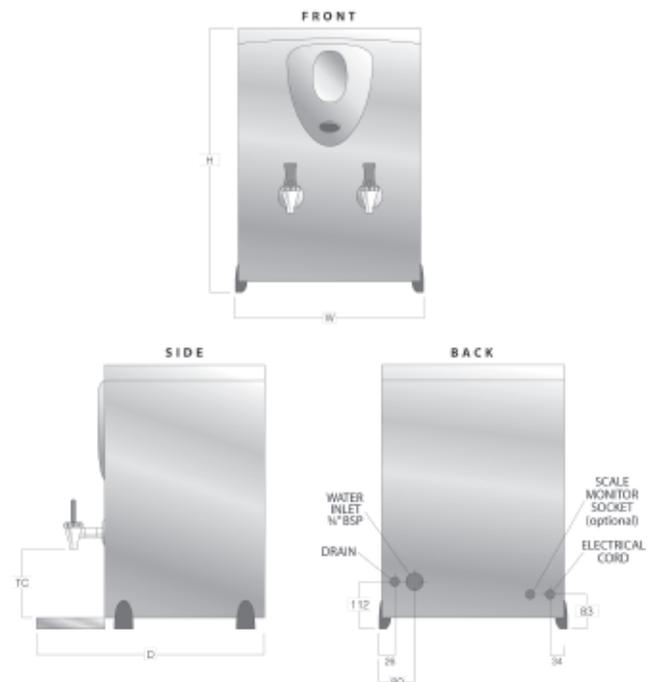

Dimensions

Model	Height (mm)	Width (mm)	Depth (mm)	Tap Clearance to Drip Tray (mm)	Rear Connection Clearance (mm)
CT6000-9	608	440	555	165	45
CT8000-6	760	440	560	185	45
CT8000-9	760	440	560	195	45

Technical Help & Advice: 01704 502911