# SF Auto-fill Counter Top Range - with built-in filtration 1501F & 3001F

These two models are an offshoot of our powerful CPF Series (page 6 & 7). They have slightly less styling and reduced diagnostic features and are not programmable, but offer substantial initial draw off and excellent hourly output at a highly competitive price.

Both models feature built-in multi-functional filtration which can be adjusted to hard, medium and soft water.

#### **Features and Benefits**

- $\cdot$  Basic fault self diagnosis with LCD read out
- · Built-in multi-purpose filtration
- · Electronic temperature control for constant temperature at around 97°C
- $\cdot$  Easy access for service and cleaning
- $\cdot$  Long-life incoloy elements
- $\cdot$  Boil dry protection
- · Stainless steel drip tray included
- · 28 litres per hour output

#### Installation

Easy to install on a stable worktop.

#### Plumbing

Designed for direct connection to a potable cold water supply using the 1.5 metre (3/4" BSP) hose supplied. An isolating valve should be installed between the supply and the heater. Rear supply connection and choice of rear (optional additional kit) or front overflow as standard.

#### Electrical

To be connected to 230 volt supply with a suitable break capacity of 13 amps.

#### Construction

Brushed stainless steel case. Stainless steel heating chamber. Low voltage switching. 2 safety cut-outs.

#### **Technical Data**


Model	Power Loading	Rapid Draw-Off		Hourly Output	
	(kW)	(Litres)	(Cups)	(Litres)	(Cups)
1501F	3	10	60	27	162
3001F	3	15	90	27	162

#### Customer Service Tel: 01704 501114







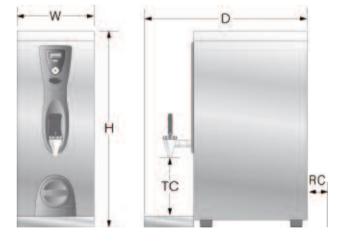

### Dimensions

Model			<b>Depth</b> (mm)		Rear Connection Clearance (mm)
1501F	610	252	360	190	50
3001F	618	310	360	190	50

## Technical Help & Advice: 01704 502911