

Push Button Dispense Boiler DB2000

Ideal for self-service, the **DB2000** has an optional advanced programmable locking system. This allows the unit to be ready for use at the touch of an electronic key and is perfect for high security users or where health and safety is a concern.

Features and Benefits

- Electronically controlled for constant temperatures
- Programmable down to 80°C if required
- Simple push and hold dispense button
- Energy saving ECO mode
- Three set locking key fob (optional)
- Early warning LCD diagnostics
- Five water level sensors

Installation

Counter mounted with drip tray.

Plumbing

Designed for direct connection to a potable cold water supply using the 1.5 metre (3/4" BSP) hose supplied. An isolating valve should be installed between the supply and the heater. Rear supply connection and choice of rear or front overflow.

Electrical

To be connected to 230 volt supply with a suitable break capacity of 13 amps.

Construction

Brushed stainless steel case.
Stainless steel heating chamber.
Low voltage switching.
2 safety cut-outs.

Approvals


WRAS approved.

Technical Data

Model	Power Loading (kW)	Rapid Draw-Off		Hourly Output	
		(Litres)	(Cups)	(Litres)	(Cups)
DB2000	3	12	72	28	168

Customer Service Tel: 01704 501114

WRAS
APPROVED
PRODUCT

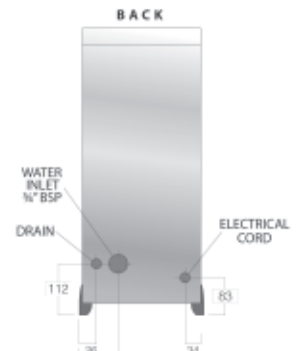

Dimensions

Model	Height (mm)	Width (mm)	Depth (mm)	Tap Clearance to Drip Tray (mm)	Rear Connection Clearance (mm)
DB2000	608	260	465	145	45

Technical Help & Advice: 01704 502911