

1.1 CATERPILLAR PACKAGE GENSET TYPE:C18-550KVA Prime.



Image shown may not reflect actual configuration

1.1.1 Engine Technical Data:

Maker:	Caterpillar Inc.
Type Of Engine:	Four-Stroke, Diesel Fuel
Application:	Power Generation, Prime Power.
Cylinders Arrangement:	Inline-Type
No. Of Cylinders:	6 Cylinder
No. Of Strokes:	four Strokes
Bore:	145.0 mm
Stroke:	183.0 mm
Displacement:	18.1 L
Aspiration:	Air-to-Air After-cooled
Compression Ratio:	14.5 : 1
Genset Output:	550 KVA - 440 eKW
Revolutions Per Minute:	1500 RPM

1.1.2 Air Inlet System:

- Air cleaner, dual element.(Not for Outdoor Use. Requires protection for outdoor storage)
- Turbocharger

Mansour House, 188 Bath Road
Slough SL1 3GA, Berkshire, UK

1.1.3 Exhaust System

- Stainless steel exhaust flex
- Industrial silencer

1.1.4 Fuel System

- Standard open set fuel tank / base supplied
- Base, formed steel with single wall integral 8-hour fuel tank

1.1.5 Starting System

- Batteries with rack and cables
- Battery Charger 5 Amp

1.1.6 Cooling System:

- Radiator and cooling fan with guard
- Coolant drain line with valve
- Fan drive, battery charging alternator drive
- Caterpillar Extended Life Coolant

1.1.7 Lubrication System:

- Lubricating oil
- Oil drain valves

1.1.8 Governing System:

- Cat Electronic Governor (ADEM A4).

1.1.9 Mounting System:

- Captive linear vibration isolators between base and engine-generator.
- includes lifting provisions and termination points for coolant and lube oil drain lines

1.1.10 Generator Technical Data:

Rating:	550 kVA , 440 eKw @ 0.8 P.F.
Voltage:	400 Volts
Frequency:	50 Hz
Speed:	1500 RPM
Insulation:	Class "H"
No. of Bearing:	Single Bearing
Excitation:	Self-Excited
Over Speed Capability:	150% of Synchronous speed
Wave Form:	Less than 2% deviation
Voltage Regulation:	± 1% (steady state)
Circuit breaker:	1250 amp, 3 pole

1.1.11 Control Panel:


Generator - mounted, EMCP4.2 .The Cat® EMCP 4.2 offers fully featured power metering, protective relaying and engine and generator control and monitoring. Engine and generator controls, diagnostics, and operating information are accessible via the control panel keypads (Electronic Modular Control Panel 4.2),

1.1.11.1 CONTROLS:

- Run / Auto / Stop control
- Speed and voltage adjust
- Local and remote emergency stop
- Remote start/stop
- Cycle crank

1.1.11.2 MONITORING:

- Coolant temperature
- Oil pressure
- Engine speed (RPM)
- Battery voltage
- Run hours
- Crank attempt and successful start counter
- Voltage (L-L, L-N)
- Current (Phase)
- Average Volt, Amp, Frequency
- kW, kVAr, kVA (Average, Phase, %)

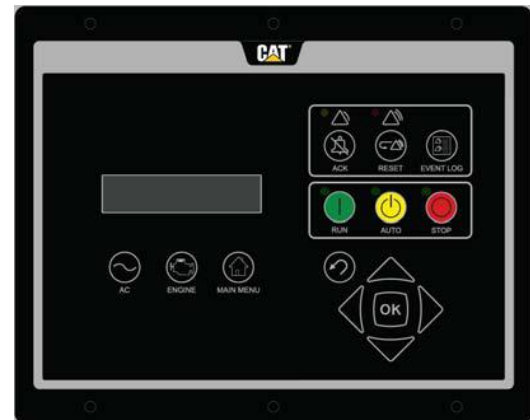

Mansour House, 188 Bath Road
Slough SL1 3GA, Berkshire, UK

- Power Factor (Average, Phase)
- kW-hr, kVAr-hr (total)

1.1.11.3WARNING/SHUTDOWN INDICATION:

- Control switch not in auto (alarm)
- High coolant temp (alarm and shutdown)
- Low coolant temp (alarm)
- Low coolant level (alarm)
- Low Oil Pressure (alarm and shutdown)
- High engine oil temp (alarm and shutdown)
- Low, high and weak battery voltage
- Over speed shutdown
- Over crank

1.1.11.4INPUTS & OUTPUTS:

- Two dedicated digital inputs
- Six programmable digital inputs
- Six programmable form A dry contacts
- Two programmable form C dry contacts
- Two digital outputs

1.1.11.5PROTECTIVE RELAYING:

- Generator phase sequence
- Over/Under voltage (27/59)
- Over/Under frequency (81 O/U)
- Reverse Power (kW) (32)
- Reverse Reactive Power (kVAr) (32RV)
- Overcurrent (50/51)

1.1.11.6COMMUNICATION:

- Primary and accessory CAN data links
- RS-485 annunciator data link
- Modbus RTU (RS-485 Half duplex)