


The *No Stank* Marine Holding Tank Vent Filter

1" Hose Size Model

Install Instructions

New Installation Tips:

- Filter can be mounted in any position. Mount the *No Stank* filter as close to thru hull vent fitting as possible to avoid plugging of filter caused by overflowing of holding tank. (Should you overfill holding tank waste into filter housing, see Warning section below*)
- Remove red plastic sealing end caps from each end of filter fittings.
- Locate the existing thru hull vent fitting location on your boat.
- Mount away from heat or electrical sources that could damage filter or cause fires.
- Locate a place to install filter mounting clips i.e. back side of boat interior wall or underside of floor support system or other secure area that you can access for future service. Mount the two (2) holding clips spaced between 8" to 8-1/2" apart. Mount with provided SS screws.
- Cut into vent line insuring proper length to new filter on each end. (Note: additional hose may be required to properly mount filter. Old hose may need to be replaced or new hose sliced into system to allow for easier installation.)
- Install hose(s) with SS hose clamps provided. (Note: it is recommended that you remove end caps when installing hose onto fittings. Light grease applied to fittings and hose ID will make installing hose easier.)
- Press filter into mounting brackets and screw each hose end onto filter fittings (hand tighten only)
- Insure you do not have any kinks in vent hose to allow free flow of air to escape from holding tank. This may require removing some of the original length of vent hose when you cut vent line. (Note: Supporting of hose may be required if undue weight or stress from hose(s) puts too much pull on filter, which may cause filter to come out of the holding clips)

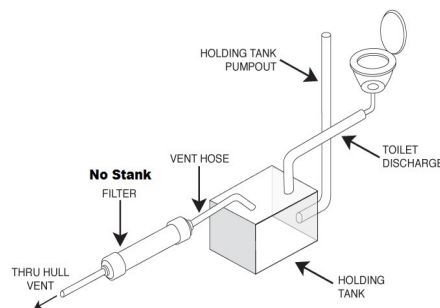

Servicing Filter / Replacing Carbon:

- Depending on toilet use, your filter will perform for an entire boating season or longer. When you start smelling odors emitting for your holding tank thru hull fitting, it is time to replace the spent carbon pellets.
- Remove filter from brackets.
- Unscrew removable end cap(s)
- keeping filter upright (air exit end up)

- Remove green screen media from tube.
- Empty contents of filter (carbon) into container or?
- Make sure filter housing is dry.
- Fill canister with new carbon pellets between 4mm – 5mm in size, designed for air filtration. If you purchased a refill from us, you will receive the exact amount and type needed to refill the filter housing and provide maximum odor free performance of filter.
- Re-install green screen media into top of tube.
- Replace filter into clips.
- Screw end cap(s) on filter unit until tight (Hand tighten snug only)

Warning:

DO NOT Install filter on marine sanitation systems where waste is treated using chlorine or other strong oxidizing agents.

- * Should you overfill the holding tank vent line and plug the intake of filter. Remove filter from boat and remove carbon contents from filter housing. Flush clean water from inside of filter back through end cap fitting to remove / clean all waste from inside of filter housing. Insure that the vent line is cleared all the way back to holding tank. Refill with clean carbon following the replacement / service instructions above. Your filter is now ready to be reinstalled into your system.
- A blocked or plugged filter line from your holding tank can cause damage to holding tank.
- Filter is designed to only remove odors from the holding tank and not from permeated holding tank hoses or compromised sanitation components.

Product Liability:

SeaRus Sales will not be held liable for damage resulting from the following:

- Improper installation, improper connection or assembly.
- Damage of filter or installation kit from mechanical or outside influences.
- Alteration of filter or installation kit
- Use of filter for other than listed intended use.
- Improper maintenance, neglect, alteration, abuse or use of carbon not supplied by us.
- We assume no other responsibility, implied or otherwise.
- The intended use of the *No Stank* filter is to remove heavy than air particles and neutralize the foul odors emitted from your marine holding tank. No other use of this filter is suggested or implied.

Warranty:

- SeaRus Sales will replace or refund your purchase price for any reason if you are not 100% satisfied for 30 days after purchase and return of product to us. We will warranty the product for 1 year to be free of defects and workmanship to the original purchaser.

Returns:

- Contact SeaRus Sales for a return authorization shipping label. Product must be in original condition and include ALL originally included parts and shipping box in return package. Upon receipt of returned item to us, we will issue a refund of original purchase price, please allow 30 days for refund to appear on your payment method's next billing cycle. Refunds will be issued through the same method as original payment. SeaRus Sales reserves the right to evaluate returned items and replace or repair any item found to be defective in material or workmanship.