

## 1.1 CATERPILLAR Package Genset Type: DE65E0



Image shown may not reflect actual package

### 1.1.1 Engine Technical Data:

Type Of Engine:	Four-Stroke, Diesel Fuel
Application:	Power Generation, Prime Power.
Cylinders Arrangement:	Inline Type
No. Of Cylinders:	3 Cylinder
No. Of Strokes:	Four Strokes
Bore:	105 mm
Stroke:	127 mm
Displacement:	3.3 L
Induction:	Turbocharged
Compression Ratio:	17.25:1
Genset Output:	60.0 kVA - 48.0 kW
Revolutions Per Minute:	1500 RPM

### 1.1.2 Air Inlet System:

- Air cleaner; light duty with disposable element

### 1.1.3 Exhaust System

- Exhaust silencer.

Mansour House, 188 Bath Road  
Slough SL1 3GA, Berkshire, UK

### 1.1.4 Fuel System

- Standard set Fuel tank / base supplied Base, formed steel with single wall integral 8-hour fuel tank;

### 1.1.5 Starting System

- 12V Battery with rack & cables
- **Battery Charger**

### 1.1.6 Cooling System:

- Radiator and cooling fan with guards
- Coolant drain line with valve
- Fan drive, battery charging alternator drive
- Caterpillar Extended Life Coolant

### 1.1.7 Lubrication System:

- Lubricating oil
- Oil drain line with valve

### 1.1.8 Governing System:

- Mechanical Governor

### 1.1.9 Mounting System:

- Captive linear vibration isolators between base and engine-generator
- Includes lifting provision and drag points
- Termination points for coolant and lube oil drain lines

### 1.1.10 Generator Technical Data:

Rating:	60.0 kVA - 48.0 kW @ PF 0.8
Voltage:	400 Volts
Frequency:	50 Hz
Speed:	1500 RPM
Insulation:	Class "H"
No. of Bearing:	Single Bearing
Excitation:	Self-Excited
Over Speed:	2250 RPM
Wave Form:	2%
Voltage Regulator:	Mark V (MARELLI)

Mansour House, 188 Bath Road  
Slough SL1 3GA, Berkshire, UK

Voltage Regulation:	$\pm 1\%$ (steady state)
TIF:	Less than 100
Circuit breaker:	Genset Mounted-3 Pole

### 1.1.11 Control Panel:

Generator - mounted, EMCP4.1 (Electronic Modular Control Panel 4.1), includes the followings:

#### 1.1.1.1 CONTROLS:

- Run / Auto / Stop control
- Speed and voltage adjust
- Local and remote emergency stop
- Remote start/stop
- Cycle crank

#### 1.1.1.2 MONITORING:


- Coolant temperature
- Oil pressure
- Engine speed (RPM)
- Battery voltage
- Run hours
- Crank attempt and successful start counter
- Voltage (L-L, L-N)
- Current (Phase)
- Average Volt, Amp, Frequency

#### 1.1.1.3 WARNING/SHUTDOWN INDICATION:

- Control switch not in auto (alarm)
- High coolant temp (alarm and shutdown)
- Low coolant temp (alarm)
- Low coolant level (alarm)
- High engine oil temp (alarm and shutdown)
- Low, high, and weak battery voltage
- Over speed
- Over crank

#### 1.1.1.4 INPUTS & OUTPUTS:

- Two dedicated digital inputs
- Six programmable digital inputs
- Six programmable form A dry contacts

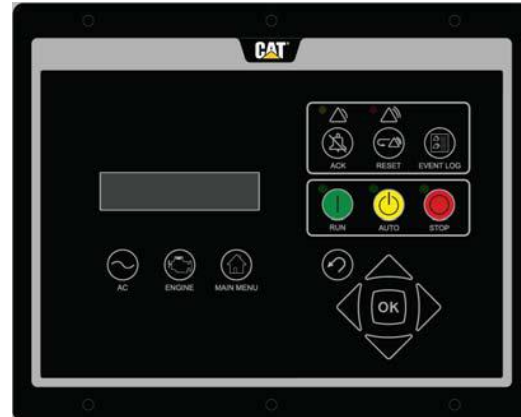

Mansour House, 188 Bath Road  
Slough SL1 3GA, Berkshire, UK

#### 1.1.1.5 PROTECTIVE RELAYING:

- Generator phase sequence
- Over/Under voltage (27/59)
- Over/Under frequency (81 O/U)

#### 1.1.1.6 COMMUNICATION:

- Primary CAN data link