


store  
away

Dunster  
Edition 2.0

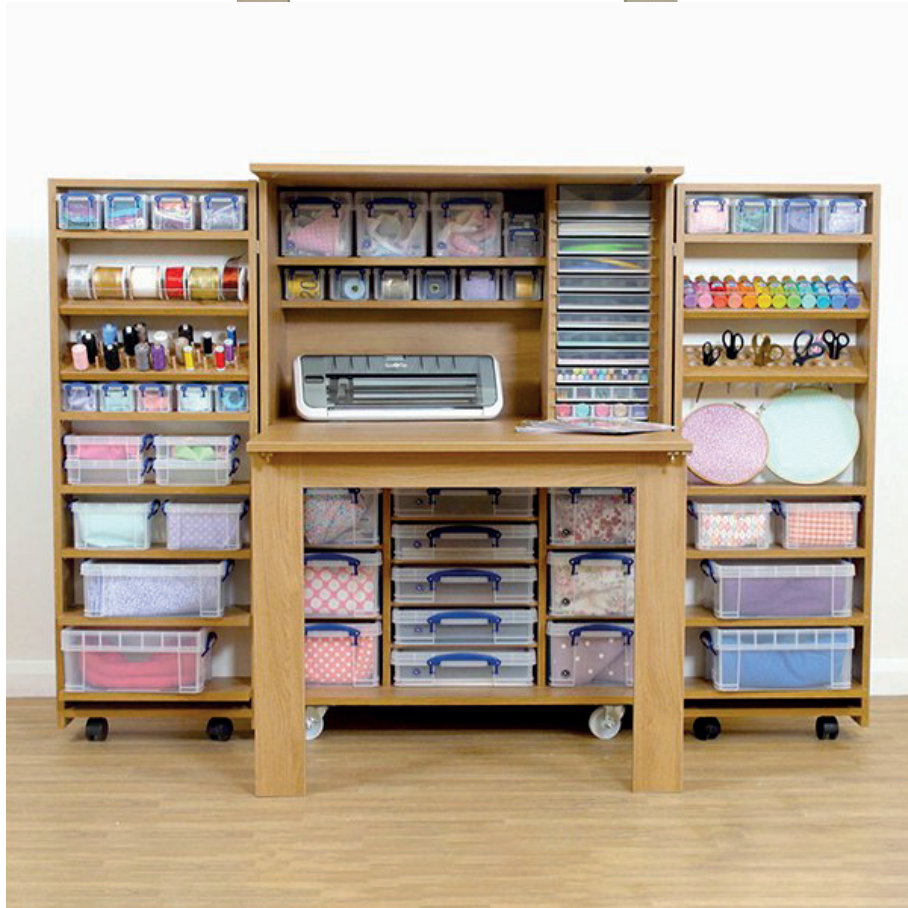

# Assembly Instructions

This page is  
intentionally  
blank

It is strongly recommended to have two persons present when assembling this item. We advise that you unpack the boxes in the order shown in these instructions and follow the assembly instructions carefully.

Please be careful during construction as section of the cupboard may be unstable until construction is complete.

**Your hardware pack should contain the following:**


	CONNECTING BOLT (CB1) X 48		FOLDING LEG BRACKET (FLB1) X 2		TRANSFORMER & PLUG x 1
	CONNECTING LOCK (CL1) X 48		WHITE CASTOR (C1) X 4	SHELF PEG WITH PIN (SP2) X 56	
	MINI CONNECTING LOCK (CB2) X 20		SCREW (CHSC-10) X 16		CABLE OUTLET X 1
	SHELF PEG (SP2) X 56		WASHER (W1) X 16		BOLT (BB1) X 2
	SHELF PEG (SP1) X 72		ANGLE BRACKET (AB1) X 8		SCREW (30-15G) X 8
	BLACK CASTOR (C2) X 4		KNOB (K1) X 2	SELF ADHESIVE SHELF STOP (DB1) X 32	
	SCREW (S10) X 18		SCREW (S30) X 2		CONNECTING PLATE X 2
	SCREW (35-17D) X 48		HINGE (H2) X 6		SCREW (30-15S) X 36
	SCREW (35-15S) X 2				

# STEP 1


## You will need to open box -

SA500/130-1S

Insert CL1 Locks into the holes as indicated

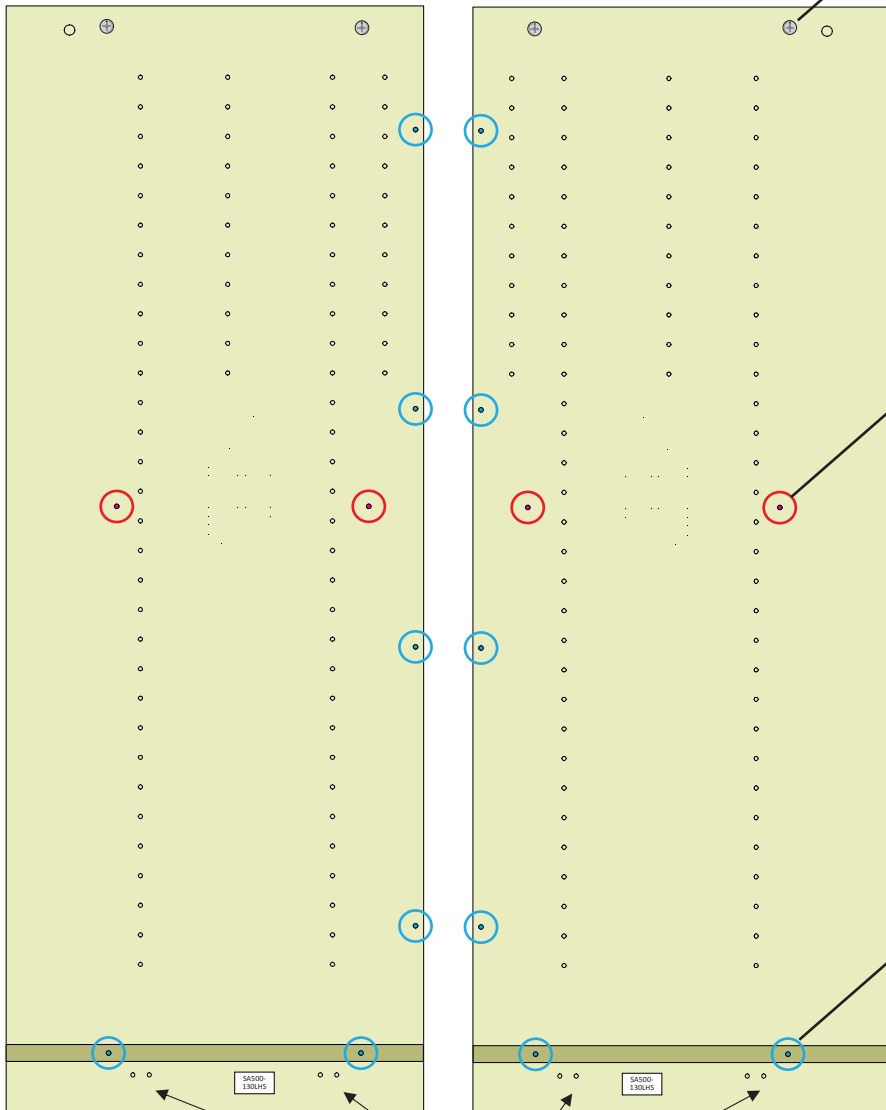

Screw CB2 Bolts into all the holes marked with a red circle



screw in to this point

Screw CB1 Bolts into all the holes marked with a blue circle

Use:


- Angle Bracket AB1
- Screw 35-17D

## STEP 2


### You will need to open box -

From this box you will require panel SA500-BASE

SA500/2BCB

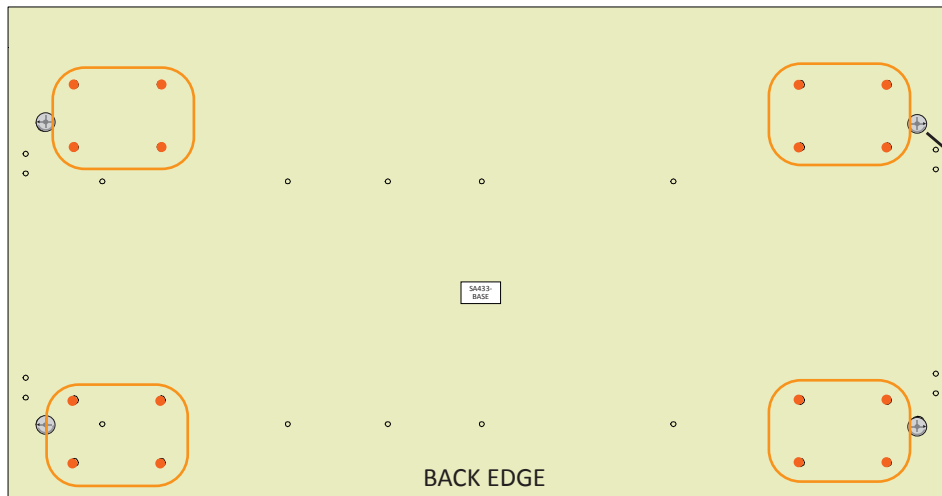

Insert CL1 Locks into the holes as indicated

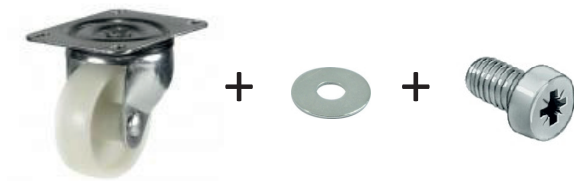

Attach the White Castors C1 to the base using washer W1 and Screw CHSC-10 - castor locations are marked in orange

## STEP 3


### You will need to open box -

SA-2B

Insert CL1 Locks into the holes in the 2 panels from this box.


## STEP 4

With the SA500/130LHS laying on the solid flat clean surface (we recommend the floor) attach the two back panels and the base. Secure by turning all of the connecting locks in the backs and the base approx one half turn. Then screw the remaining 35-17D screws into the angle brackets to secure the side to the base.

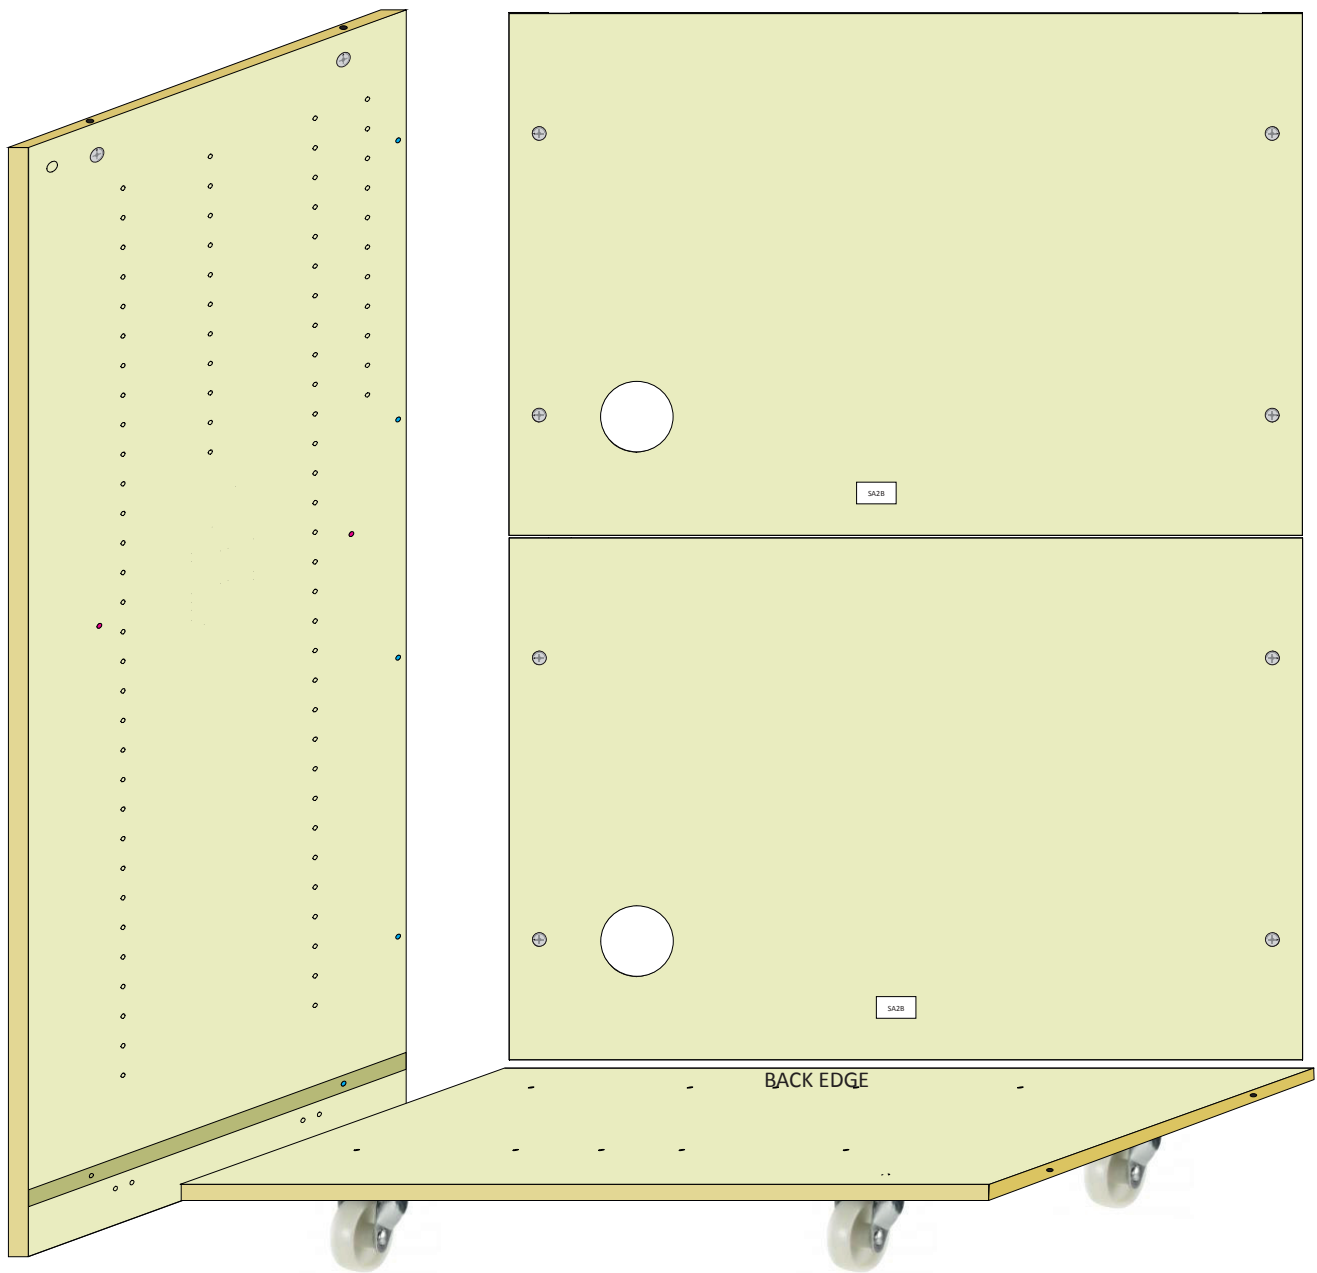

## STEP 5



With the unit still laying on the floor place the SA500/130RHS onto the top and secure all the connecting locks and angle brackets. Then carefully stand the unit onto its wheels. **IT IS HIGHLY RECOMMENDED TO HAVE TWO PEOPLE TO COMPLETE THIS STEP TO AVOID INJURY OR DAMAGE TO THE PRODUCT.**

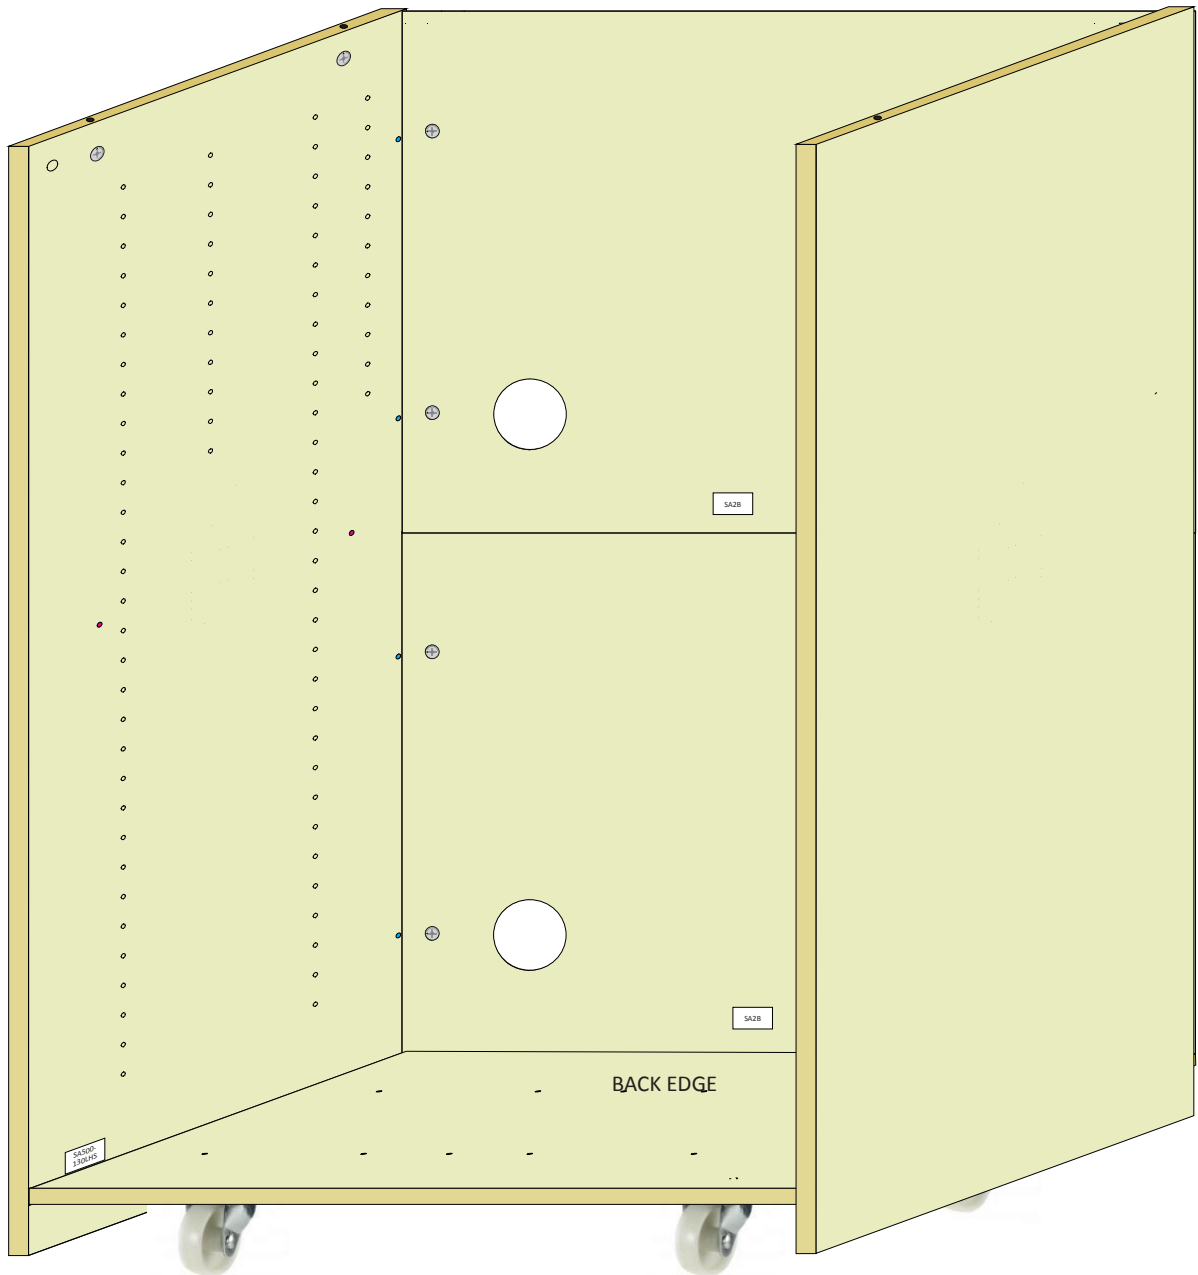

## STEP 6

You will need to open box -

SA500/13-  
TOP

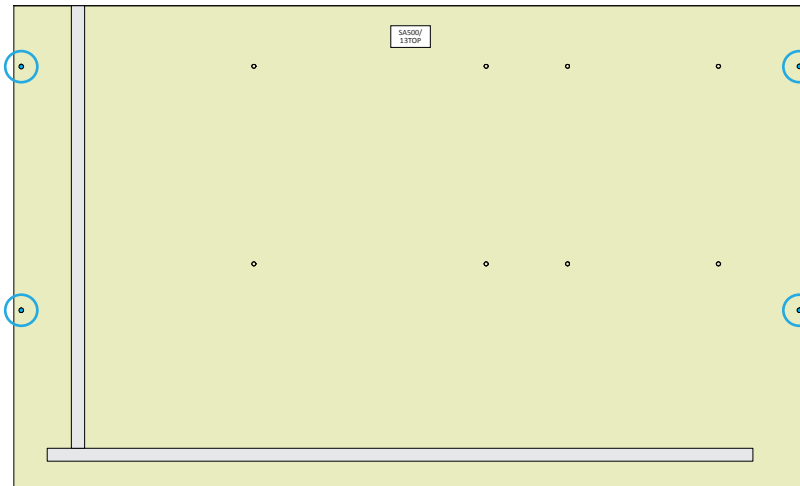

screw in to  
this point

Screw CB1 Bolts into all  
the holes marked with  
a blue circle


Place the SA500/13-TOP onto the top of the section you have already constructed and tighten the connecting locks to secure.



**STEP 7**


**You will need to open box -**

**SA500-DS**

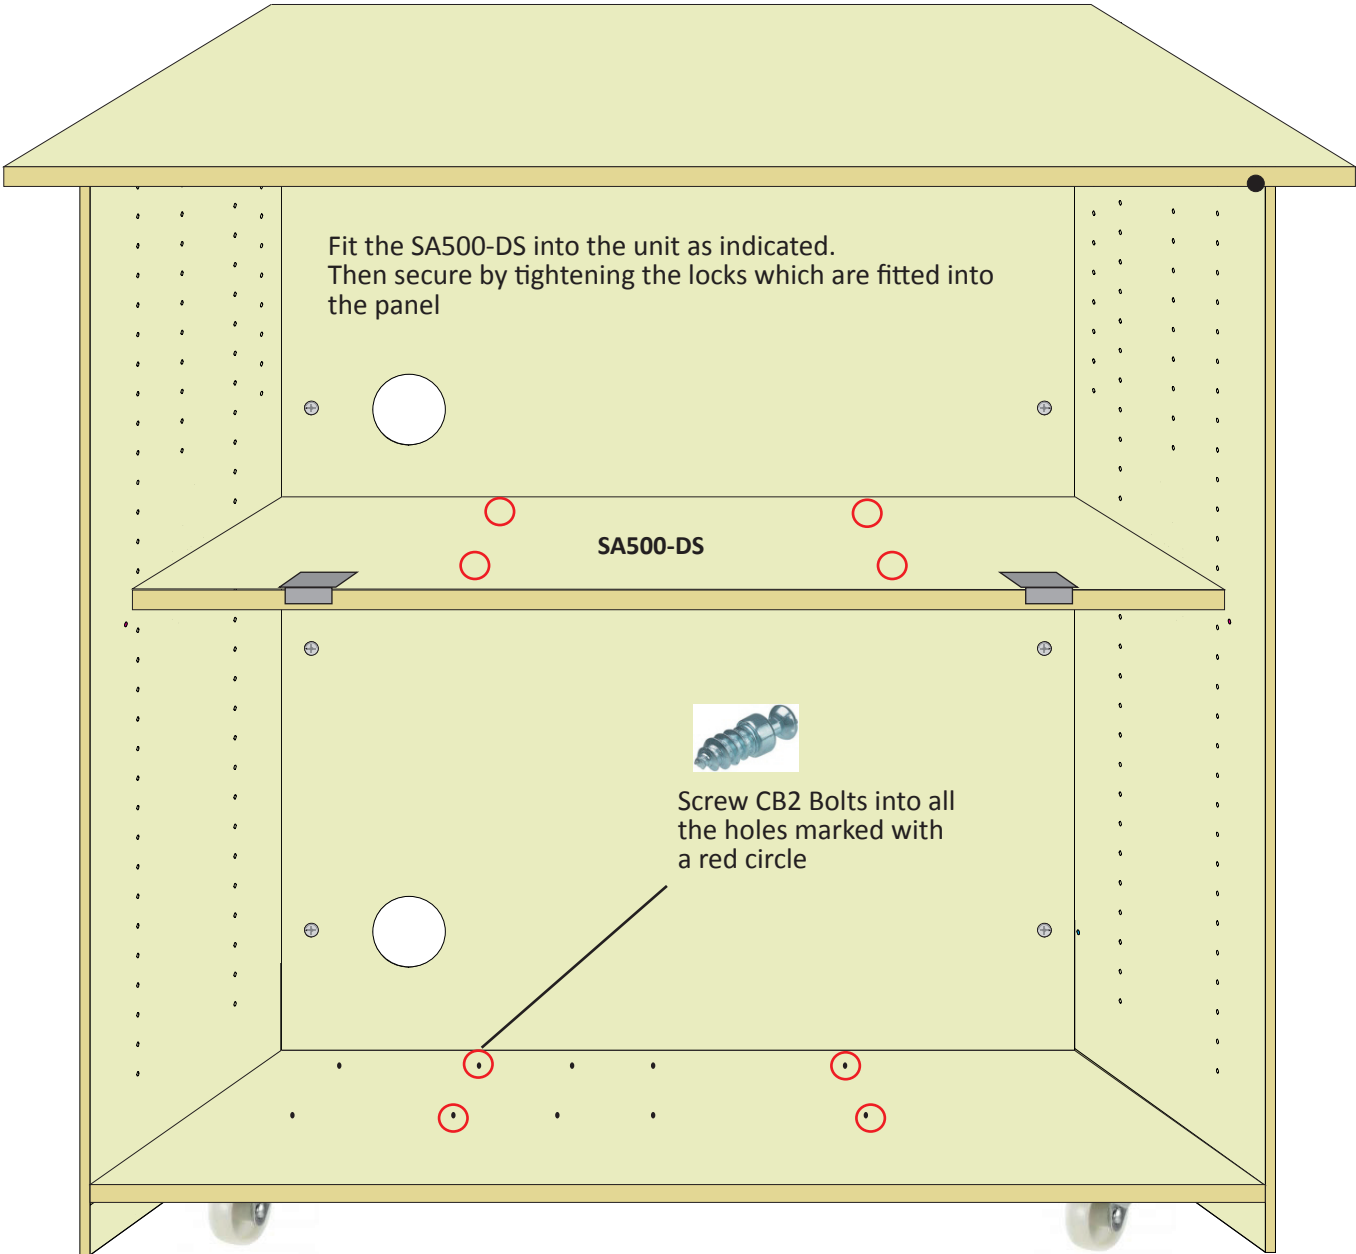


## STEP 8

You will require 2 x SA-BCD from boxes you have already opened.

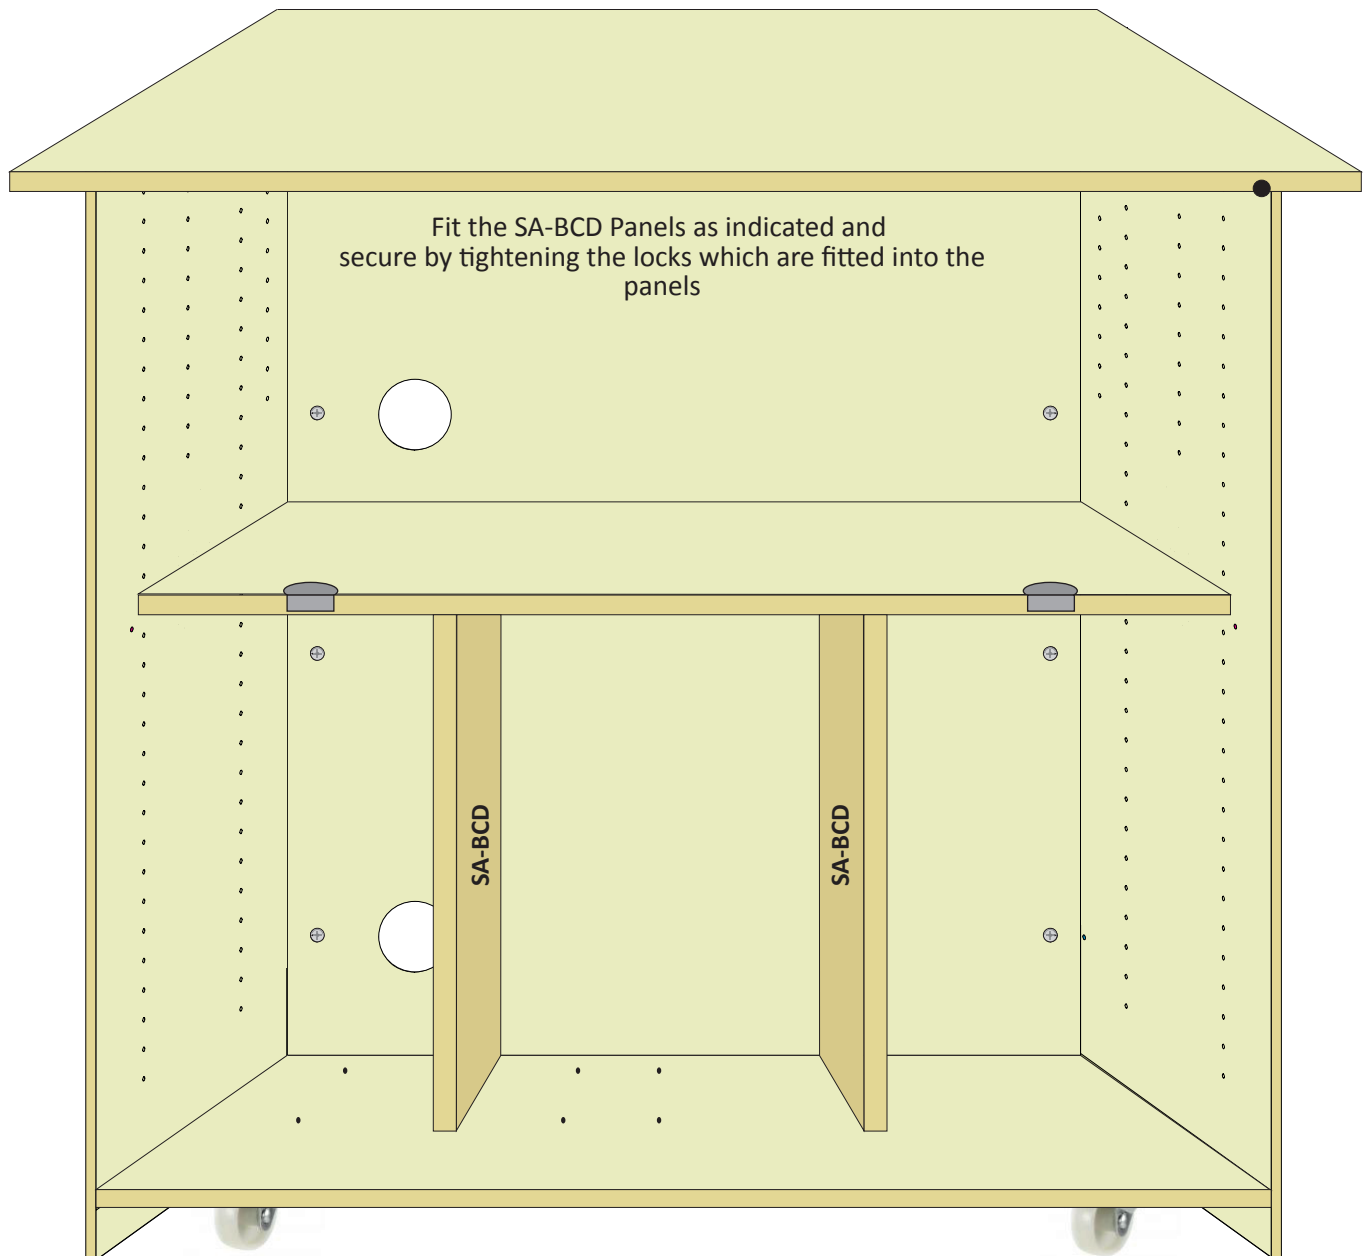


# STEP 9

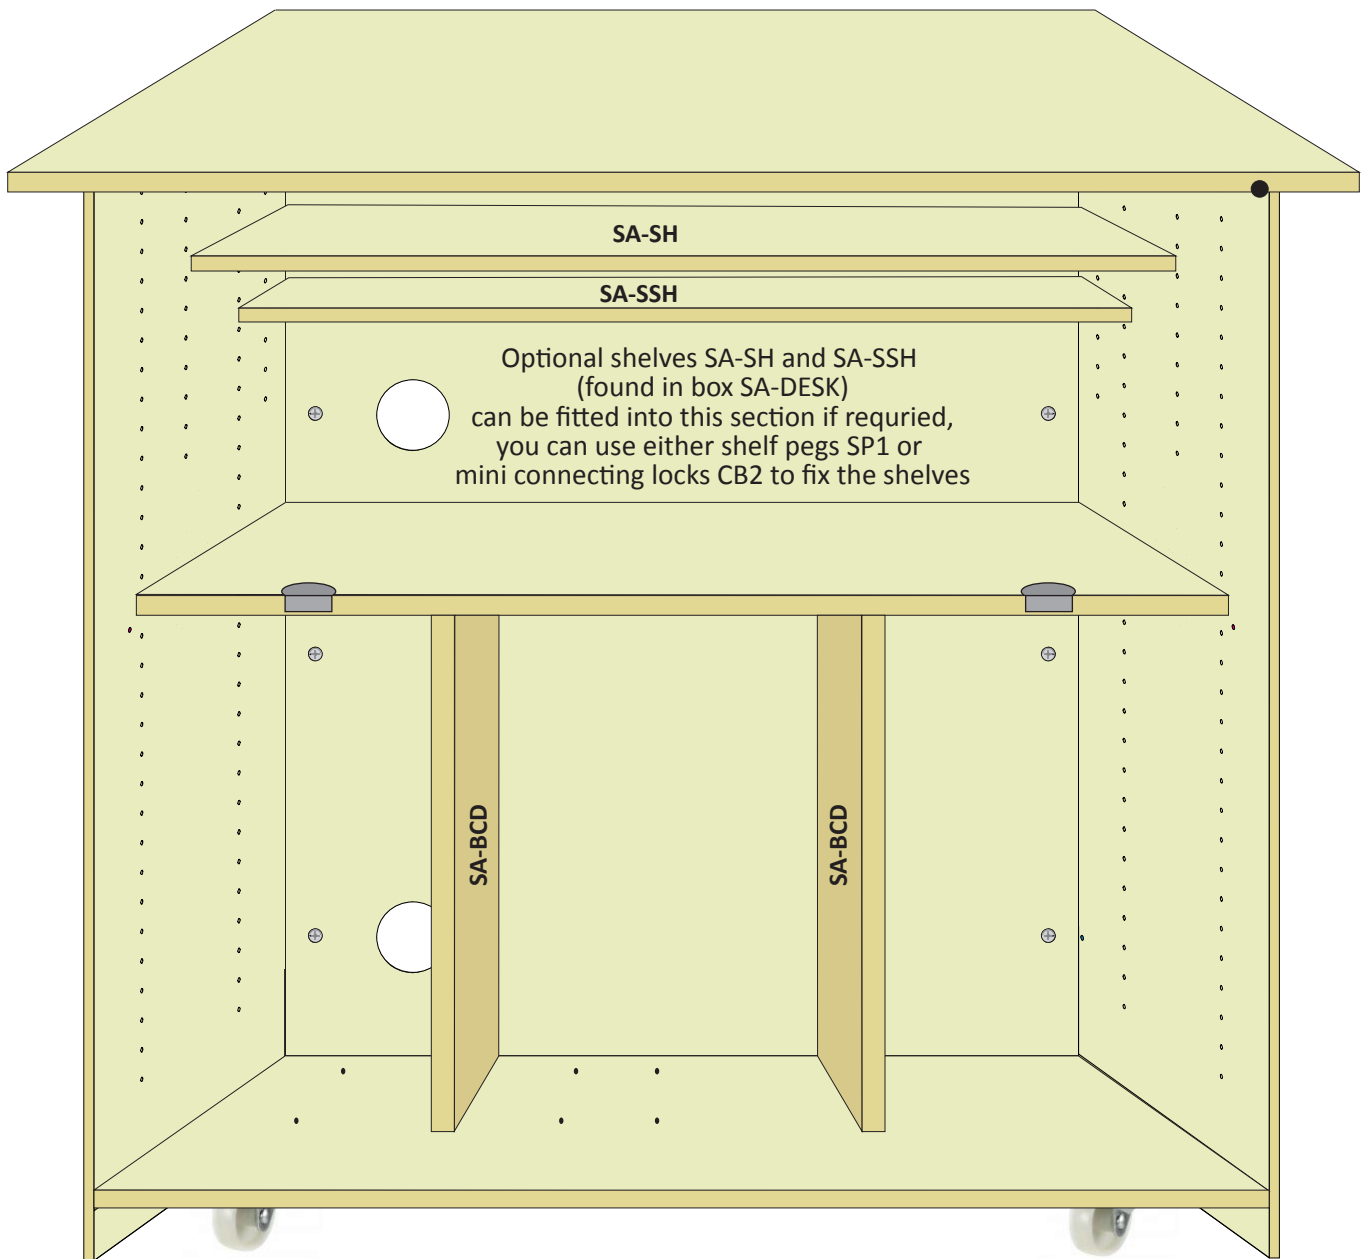

# STEP 10 - You will need to open box

You will require SA500-DESK, SA-LBAR and 2 x SA-TLEG from box SA-DESK which you may have already opened.

SA-DESK




Attach Bolts BB1 with Screws 30-15G



Add a small quantity of PVA glue into each hole marked with a red circle.


Complete this on both SA-TLEG

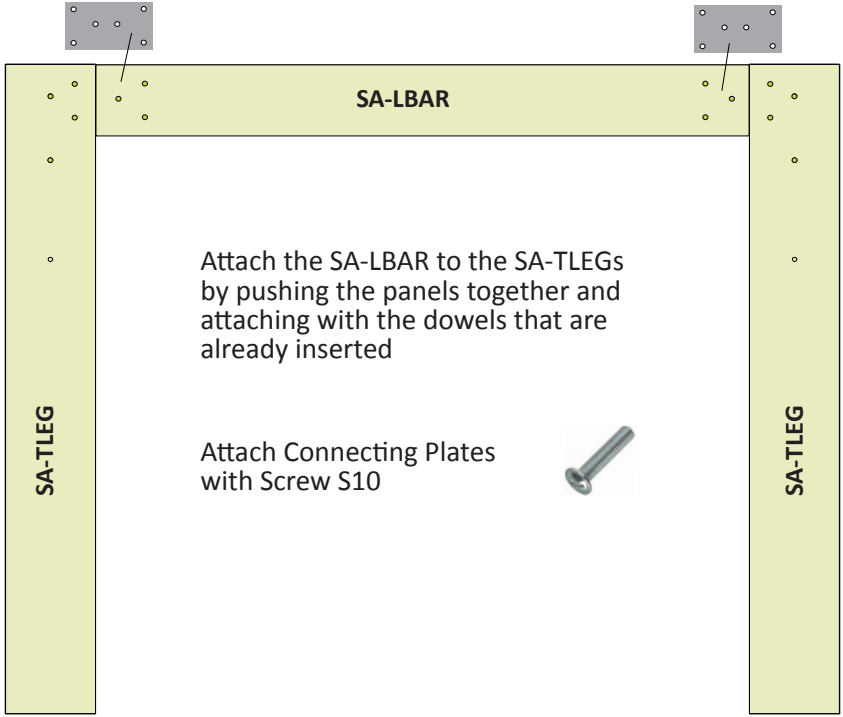

Attach the constructed leg section to the SA500-DESK using the Folding Leg Bracket (FLB1) and screws S10 (to fix into the brass inserts) and screws 35-15S (to fix into the pre-drilled holes)

## STEP 11

Attach the complete desk to the main section using the two part hinges that are already attached to the desk and the desk shelf. The hinges can be adjusted to ensure the desk is level by turning the small adjustment screw clockwise or counter clockwise. Once in place ensure it is secured with bolts supplied.

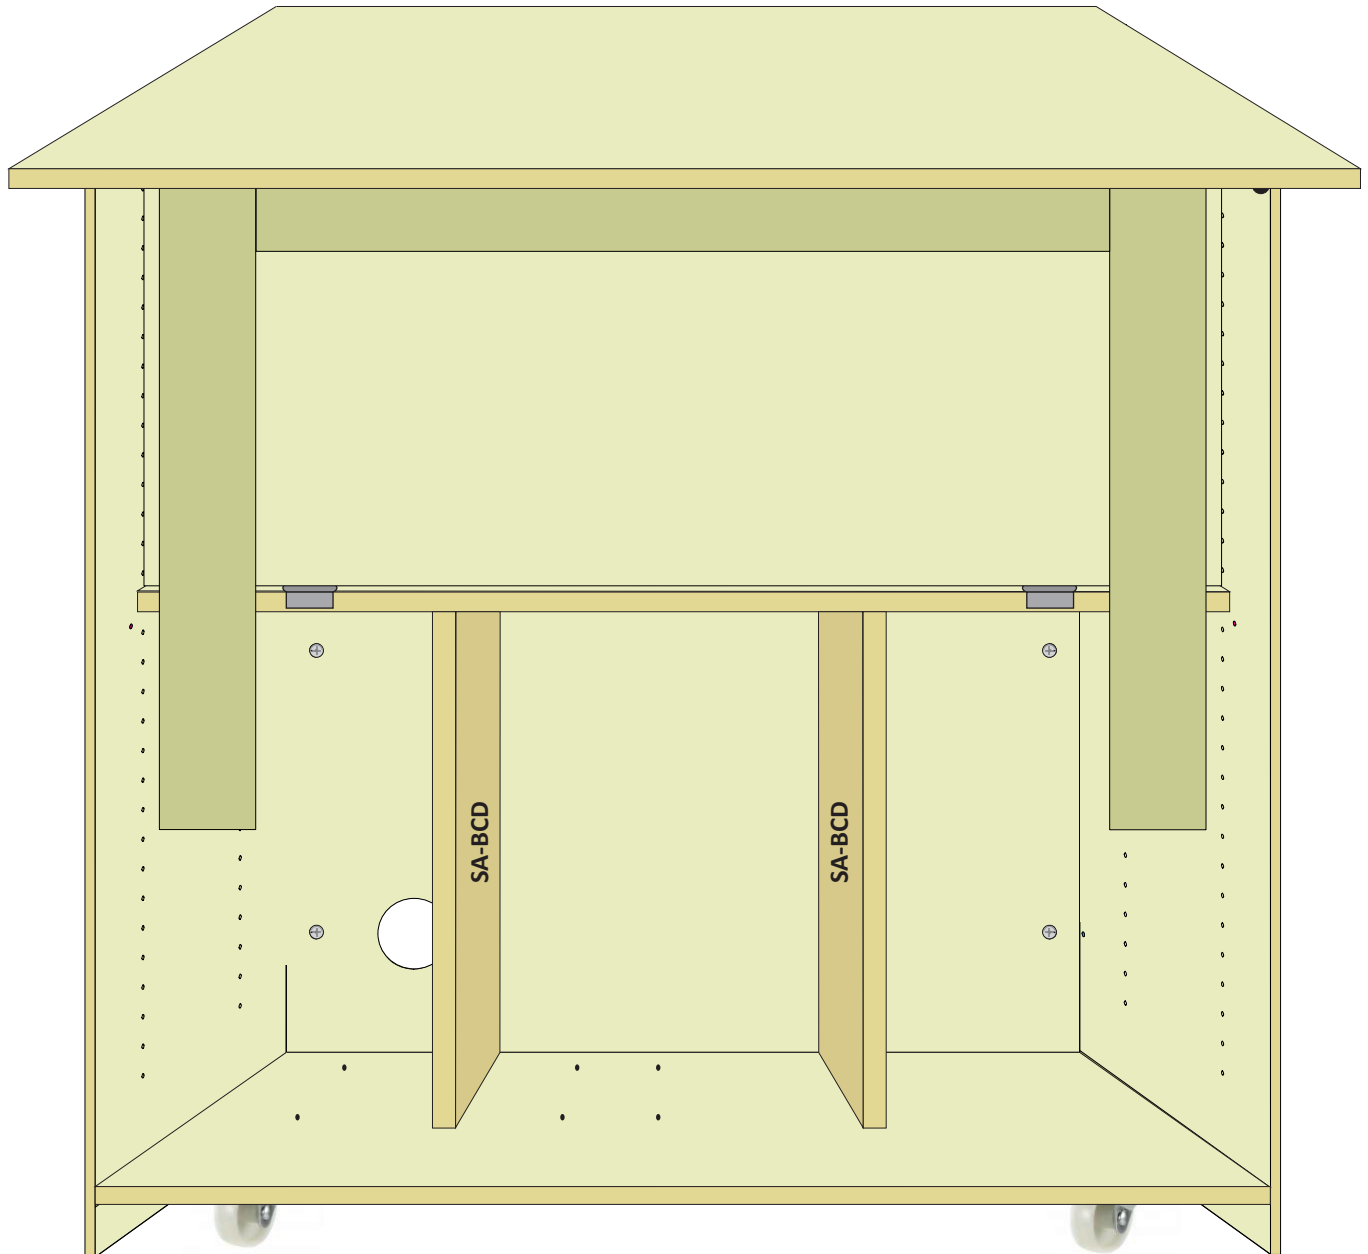

### **IMPORTANT**

WHEN USING THE DESK ALWAYS MAKE SURE TO HAVE FOLDED OUT THE LEG BEFORE UNDOING THE BOLT AND FOLDING THE DESK DOWN. FAILURE TO DO THIS MAY RESULT IN DAMAGE TO THE HINGES AND THE UNIT

THIS COMPLETES CONSTRUCTION OF THE CENTRE SECTION OF YOUR UNIT

# STEP 12

## You will need to open box -


SA130/13

2STB

This box contains the sides, tops and bases for the door sections for your unit. Follow the instructions below carefully to construct your door section.



### To fit to the LEFT HAND SIDE

### To fit to the RIGHT HAND SIDE

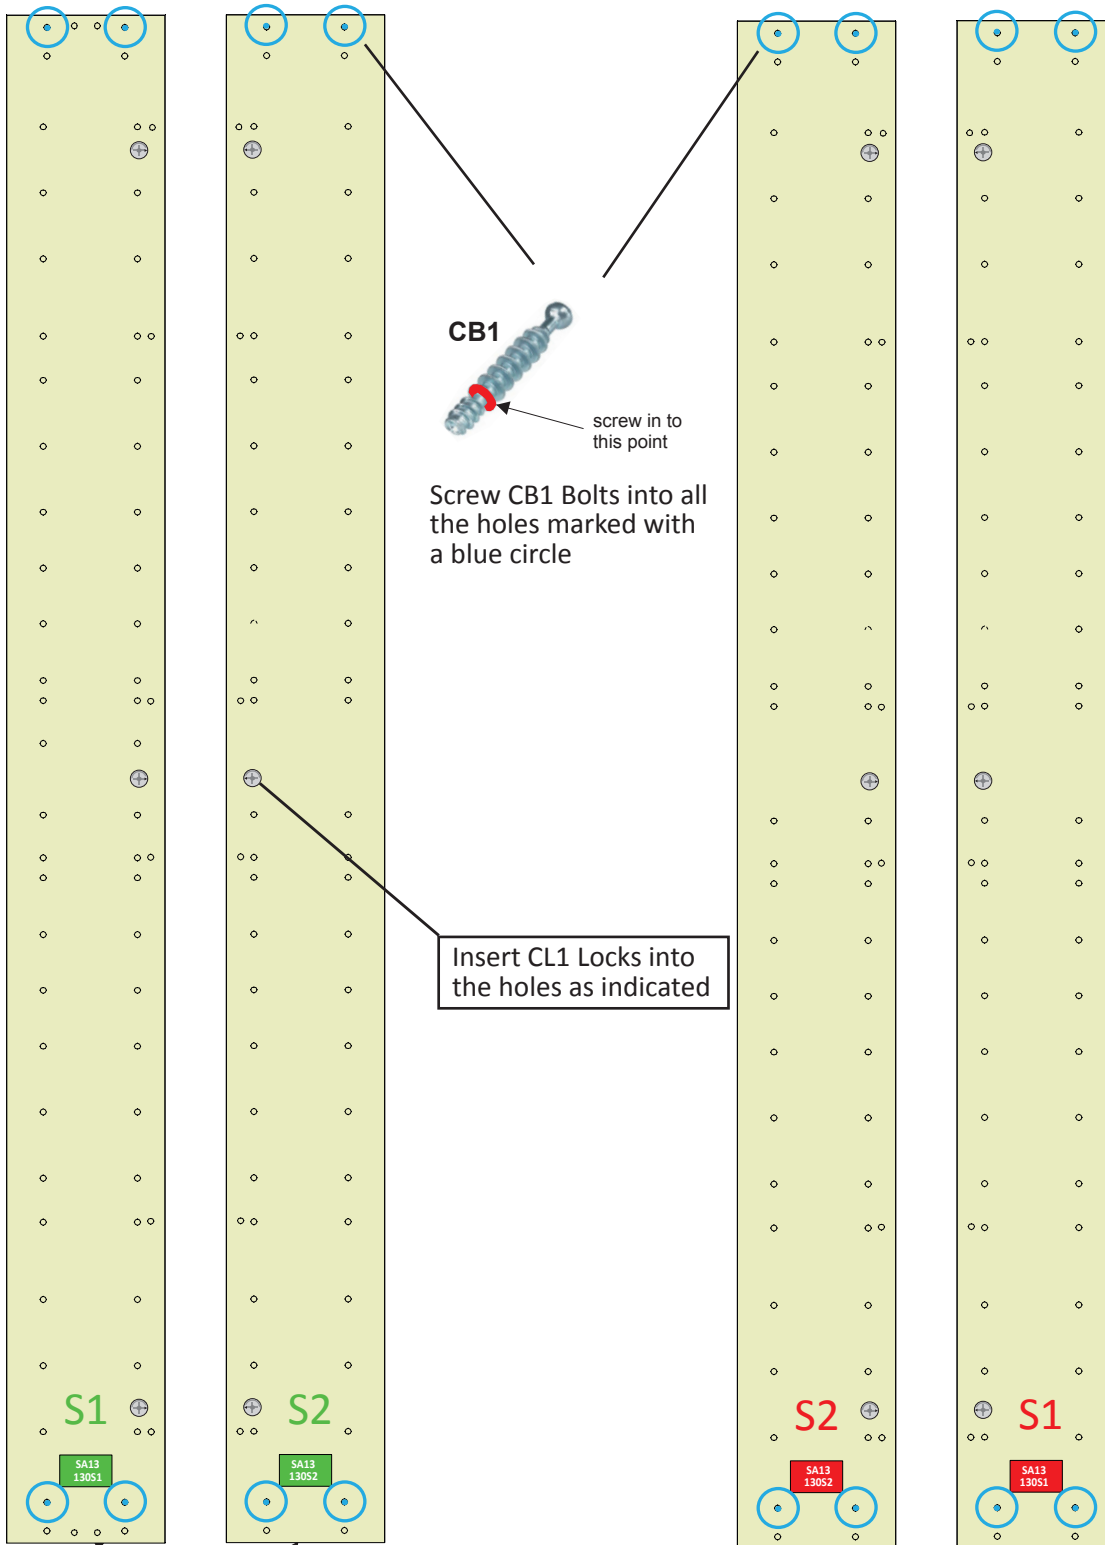


Use:

- Angle Bracket AB1
- Screw 35-17D





# STEP 13

With the SA13-130S1 laying on the solid flat clean surface (we recommend the floor). Attach the SA13-130S1 and SA13-130S2 to the SA13-BASE and SA13-TOP and secure by tightening the connecting locks CL1. Then fix the angle brackets to the base using screw 35-17D.

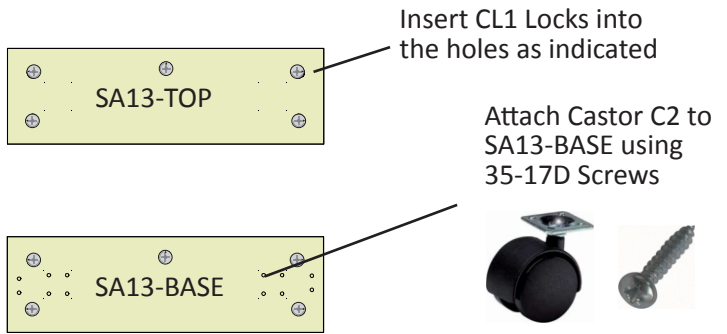


To fit to the LEFT HAND SIDE

To fit to the RIGHT HAND SIDE

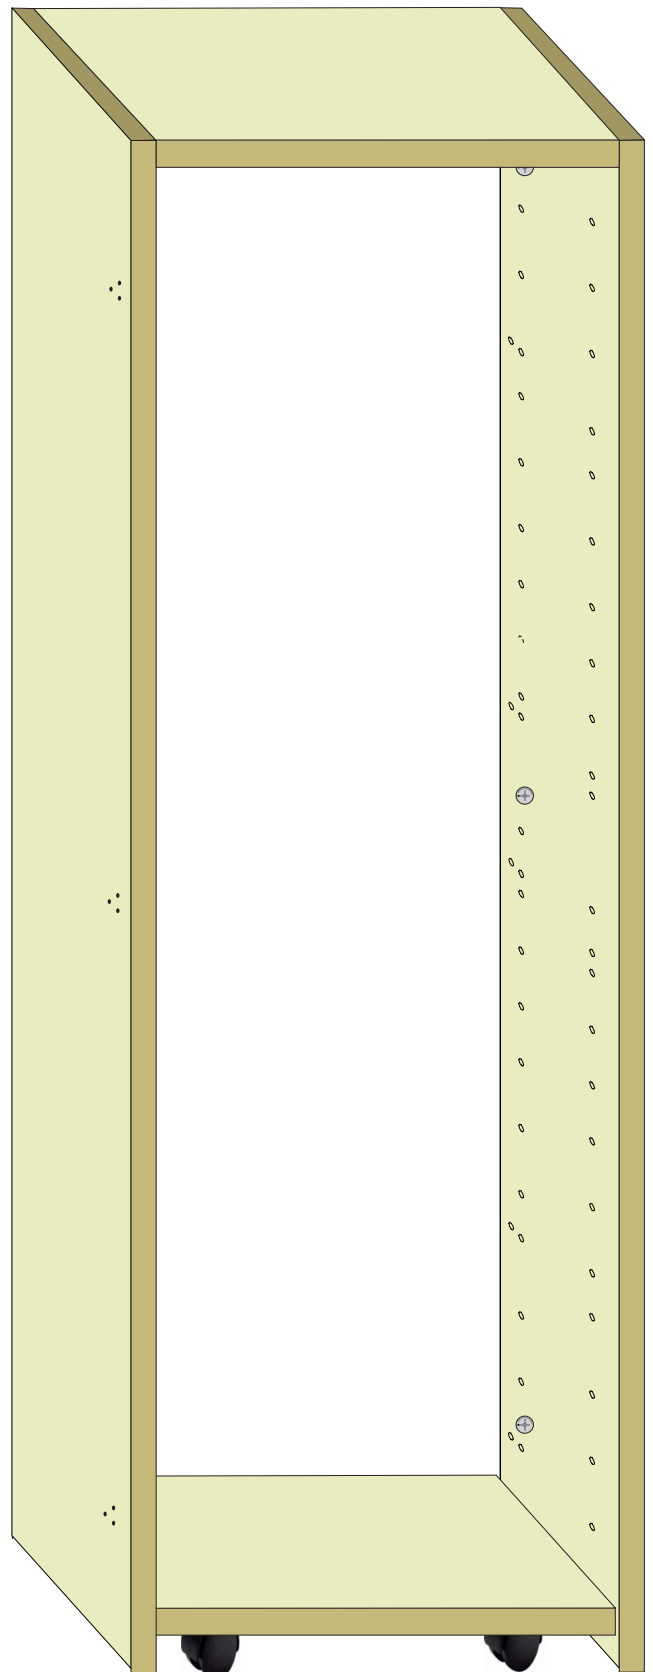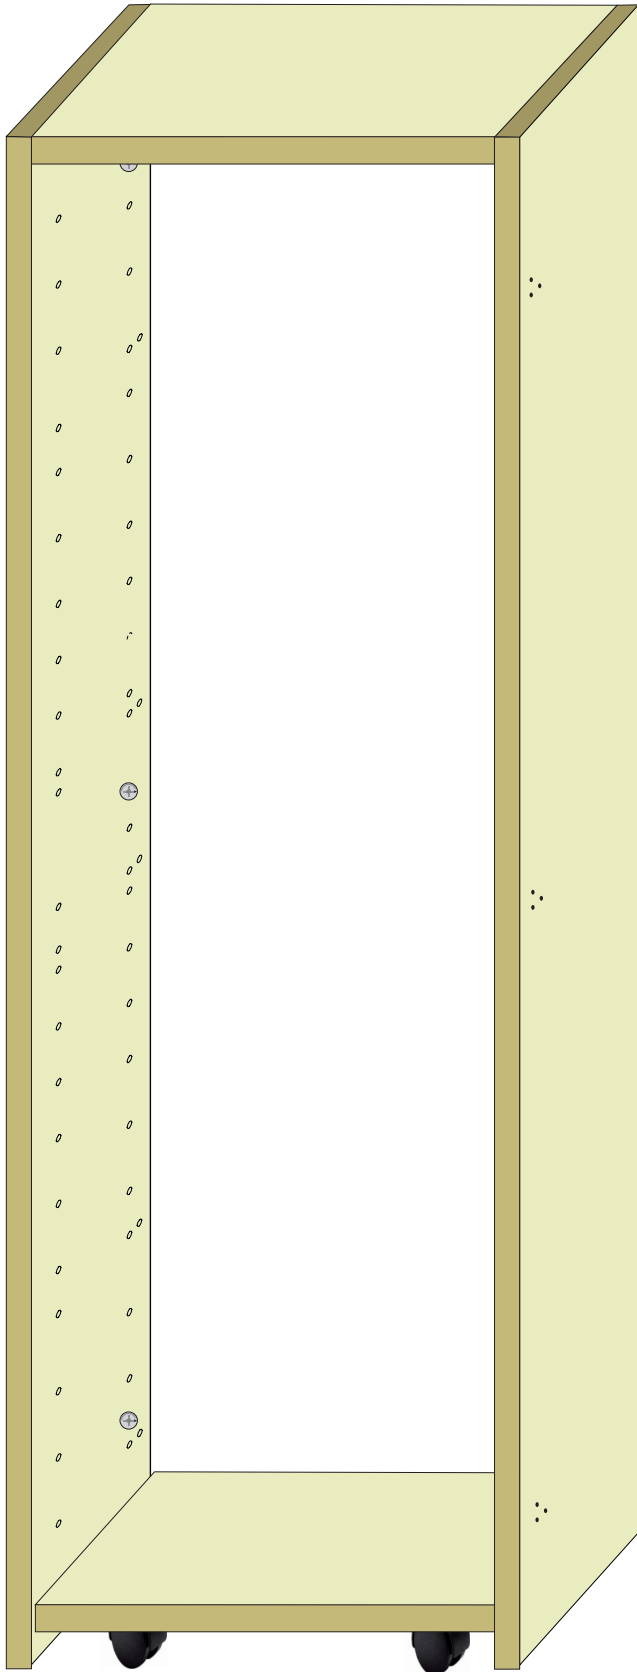

# STEP 14

With the Door Fascia Panel laying on the solid flat clean surface (we recommend the floor). Attach the section that you have already assembled and secure by tightening the locks which are fitted to the panels.

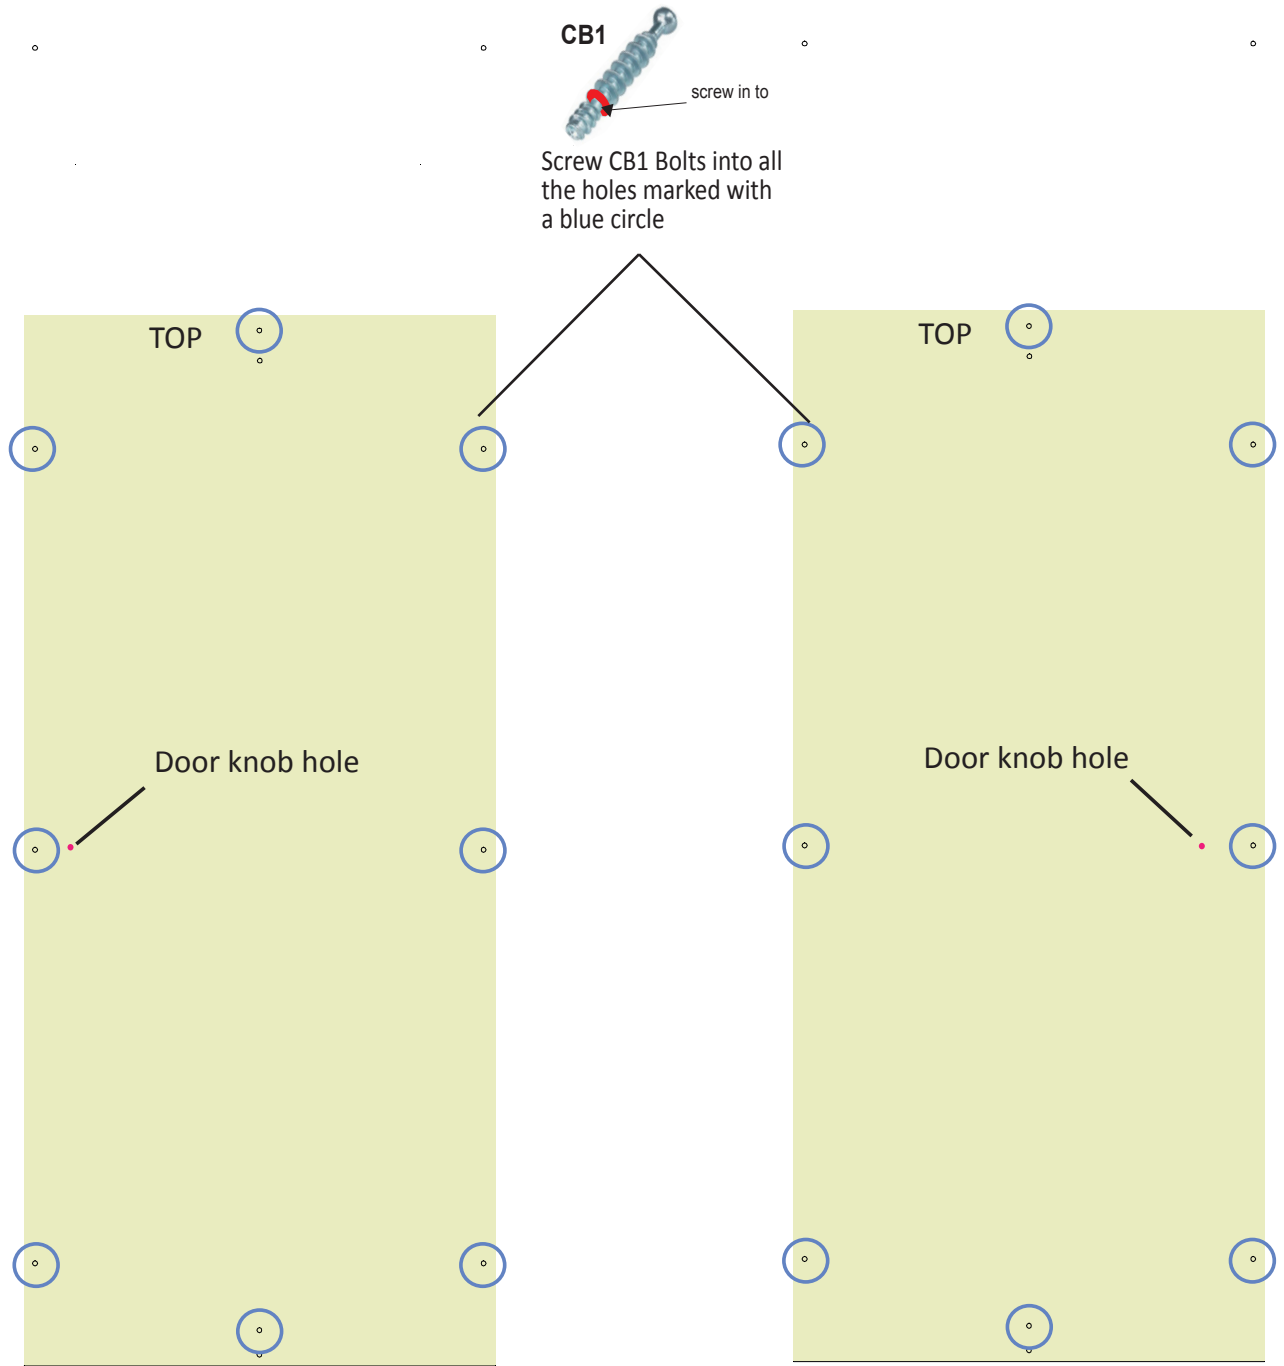

To fit to the LEFT HAND SIDE


To fit to the RIGHT HAND SIDE



## STEP 15




Using Hinge H2 and Screws 30-15S attach the completed door sections to the centre section you have already constructed.

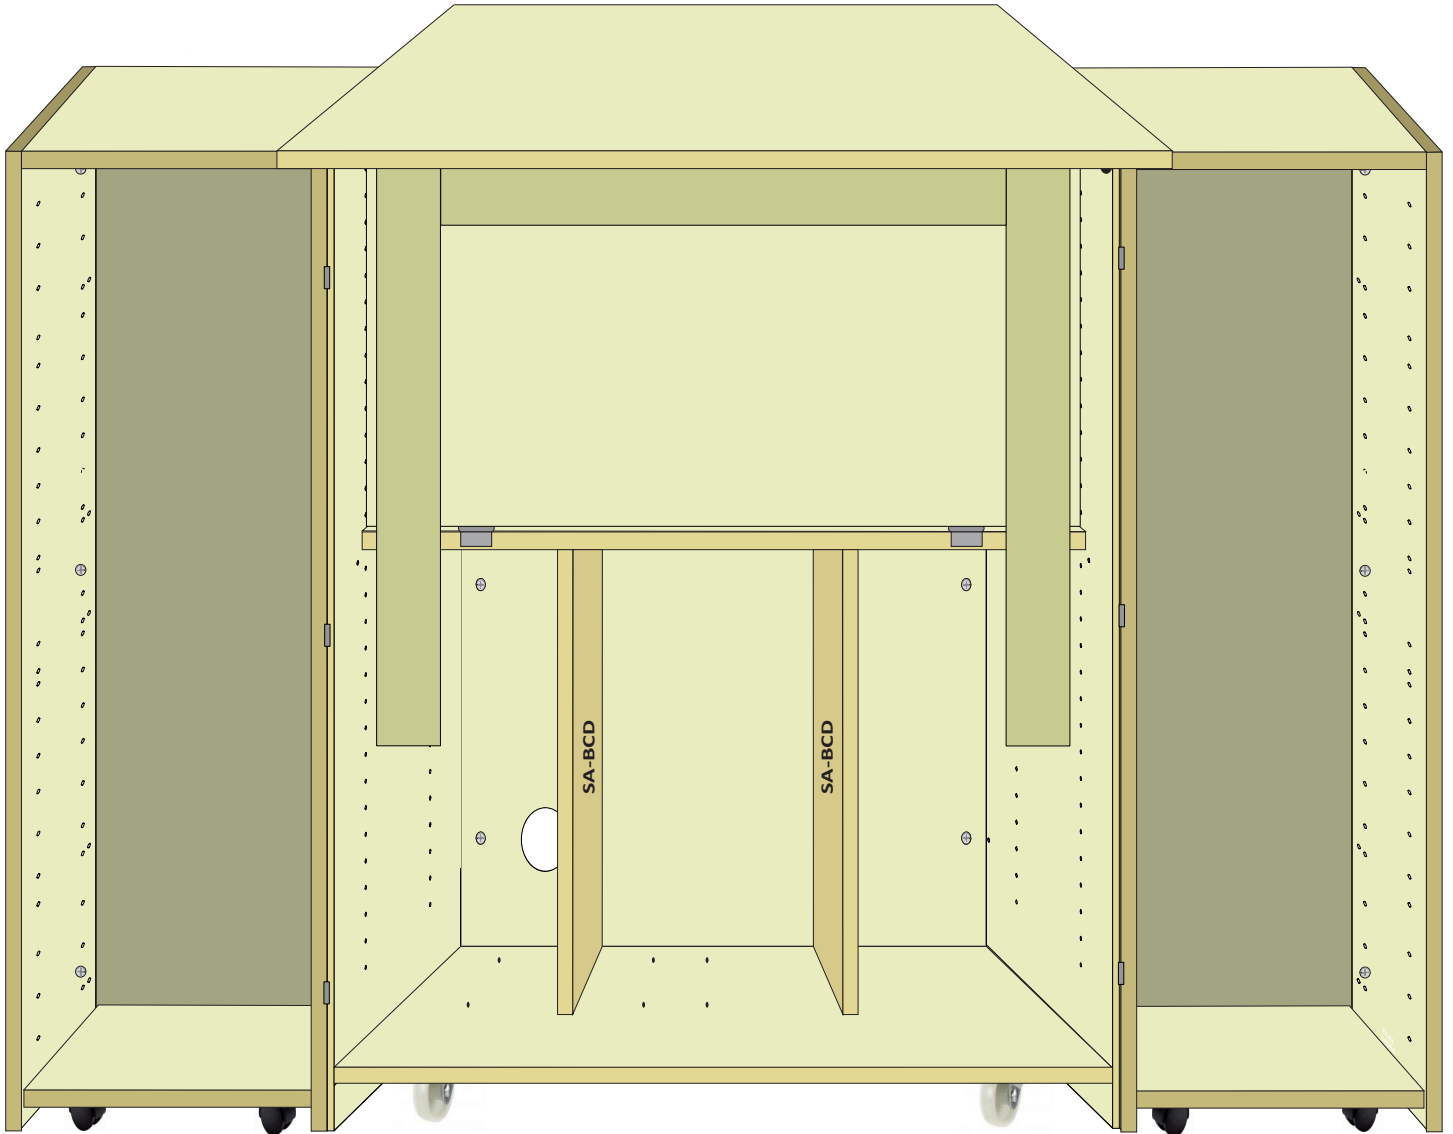


## STEP 16

Add shelves and racks to the door sections you have just attached.




To fit a flat shelf with NO acrylic front (for storing boxes) use an SA13-SH with slot facing down (not visible). Use shelf pegs SP2 to fit the shelf and then add a DB1 self adhesive shelf stop above the shelf as shown on the next page.

SA13-ACRYLIC



To fit a shelf on an angle with an acrylic front (or ribbons etc.) use SA13-SH with acrylic fitted into the slot. Fully insert the acrylic into the shelves and then fit the rack using SP2 and SP1 shelf pegs. The SP2 should support the front of the shelf and rest the back of the shelf onto an SP1 placed one hole higher. Once the shelf is fitted on to the shelf pegs stick a shelf stop to the side of the rack right above the shelf to stop the shelf lifting off the pegs as shown on the next page. Also use this same process to fit a thread rack on an angle.


Acrylic fronted shelves and thread rack can be fitted flat if

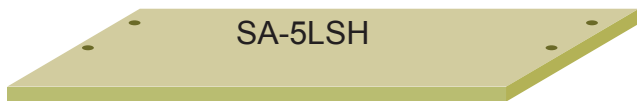

To fit the two bottom shelves to suit 5L and 5LXL boxes use SP2 shelf pegs under the shelves and securely sit the shelves down on the pegs ensuring the pins locate into the holes in the shelves. Once the shelf is fitted add an SP1 shelf peg into the hole directly above the shelf at the back to stop the shelf tipping. See the next page for further details.



# STEP 16 continued

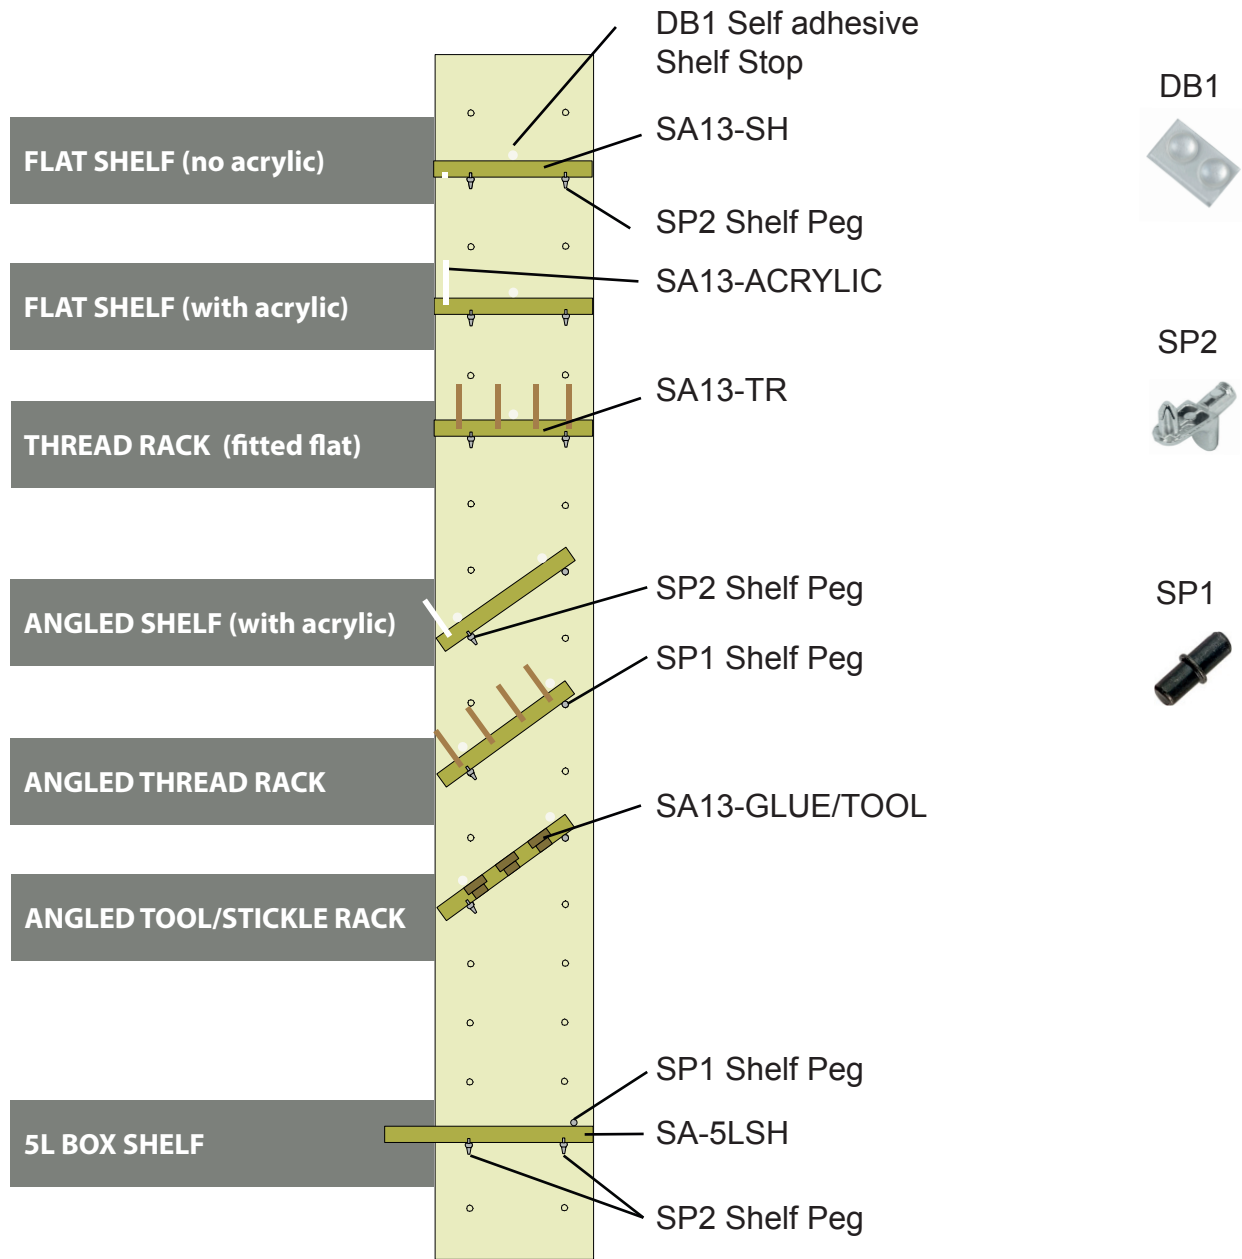

All of the shelves and racks can be fitted according to your individual needs. We have suggested box layouts which we have found to be popular.

PLEASE NOTE you can only fit TWO of the SA-5LSH for 5L boxes at the BOTTOM of each door section, if they are fitted any higher they will prevent the doors from closing when the desk is folded up.

## STEP 17

A standard layout of boxes is shown below. The best way to fit the boxes is to start at the bottom of each section, insert a box then add shelf pegs (SP1) and a shelf above then continue until the section is full. Use MDF shelves and SP1 shelf pegs as supplied.

The setup of shelves and boxes shown here is only one option, the shelves are adjustable to suit a range of box configurations.




## OPTION 1

The option if great for Sewing but can be used for other craft uses

## STEP 17 continued

If you have opted for the addition of the tray storage within you Dunster 2.0 then this is the suggested box layout. To fit you tray pack use CB2 - mini connecting bolts to fit the centre divider in the desk section and secure in the same way as the centre dividers you fitted earlier. The right hand tray panel can either be fitted using the pre-fitted adhesive tape or you can use S30 screws and M4 brass inserts (If using the screws and inserts locate the appropriate holes in the sides and carefully knock the brass inserts into the holes then screw the panel into place).

You will also find a pack of shorter shelves to fit in the desk section to the left of the tray pack as shown below.

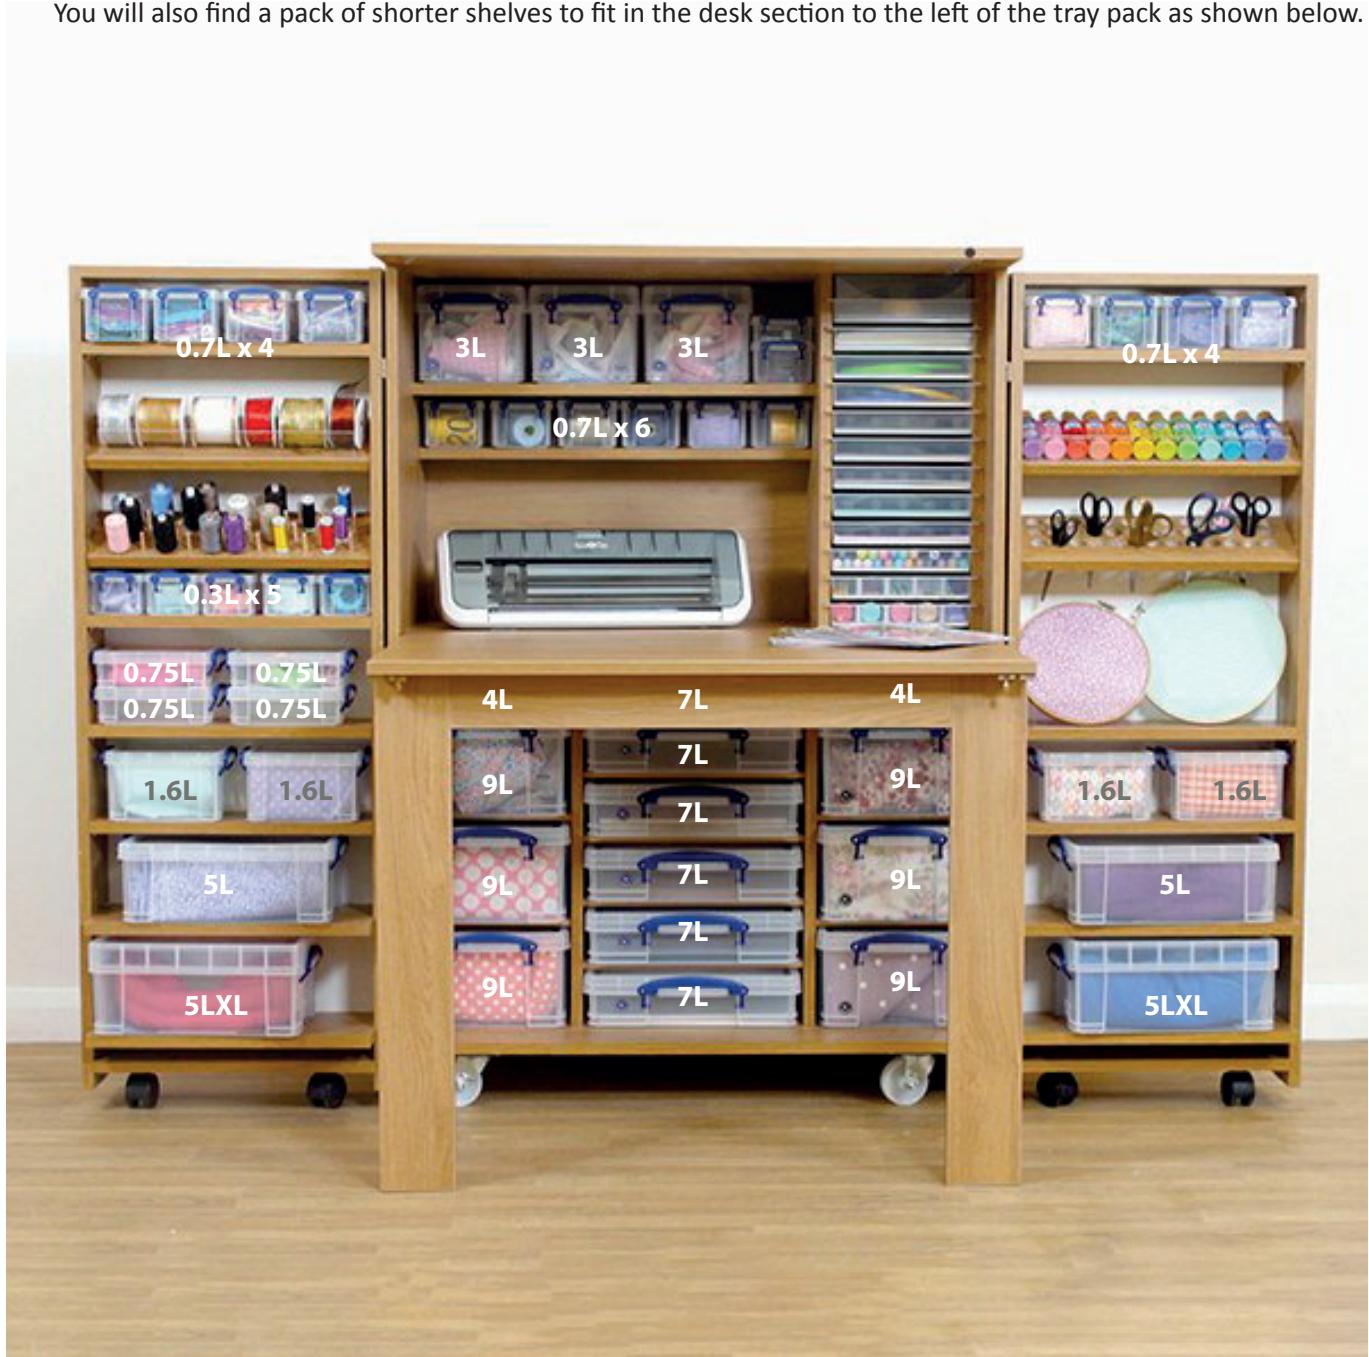

## OPTION 2

The option if great for Papercraft but can be used for other craft uses

## STEP 17 continued

Another standard layout of boxes is shown below. The best way to fit the boxes is to start at the bottom of each section, insert a box then add shelf pegs (SP1) and a shelf above then continue until the section is full. Use MDF shelves and SP1 shelf pegs as supplied.

The setup of shelves and boxes shown here is only one option, the shelves are adjustable to suit a range of box configurations.



### OPTION 3

Multi use suggested craft layout

This page is  
intentionally  
blank

store  
away **Dunster  
Edition 2.0**



The Storeaway Dunster 2.0 unit is designed and manufactured in the UK by:

