PHENYX PRO®

PTV-2000

Phenyx Pro PTV-2000 4-Channel VHF Fixed Frequency Wireless Microphone System



OWNER'S MANUAL

PHENYX PRO®



www.phenyxusa.com | www.phenyxpro.com

Thank you for purchasing the PHENYX PRO PTV-2000 4-Channel VHF Fixed Frequency Wireless Microphone System.

Please read this manual carefully to ensure proper use and operation, and keep it for future reference.

Table of Contents

- 4 System description
 - Box contents
 - System overview
 - Receiver
 - Transmitters
- 9 Operating instructions
 - Set up
 - Operation
- 10 Troubleshooting instructions
- 11 Specifications
- 12 Warranty Information & Technical Support

Warranty Information & Technical Support

Our Warranty to you:

Phenyx Technologies ("Phenyx") warrants Phenyx products against evident defects in material and workmanship for a period of one year from the date of original purchase for use. This warranty is valid exclusively in the US and applies only to the original owner. If you discover a defect covered by this warranty, Phenyx will repair or replace the product at our sole discretion using new or refurbished components. Performance of repairs or replacements under this Warranty is subject to registration of your product at www.phenyxusa.com/registerproduct.

Product failures not covered by this warranty:

This warranty covers defects in manufacturing that arise from the correct use of the device. It is limited to defects in materials or workmanship and does not cover electrical or mechanical damage resulting from abuse, misuse, unauthorized modi cation, lack of reasonable care, extreme heat, cold, damage due to natural forces, or corrosive environments. This warranty does not cover the normal wear and tear on covers, housing, connectors, and accessories.

Limits of liability:

If your Phenyx product fails or does not perform as warranted, your sole recourse shall be to replace or repair it as described above. Phenyx will not be liable to you or anyone else for any damages that result from the failure of this product. These damages include, but are not limited to, the following: lost pro ts, lost savings, lost data, damage to other equipment, and incidental or consequential damages arising from the use of or inability to use this product. IN NO EVENT PHENYX SHALL BE LIABLE FOR MORE THAN THE AMOUNT OF YOUR PURCHASE PRICE, NOT TO EXCEED THE CURRENT LIST PRICE OF THE PRODUCT.

How to obtain service under this warranty:

Please contact us at service@phenyxusa.com or support@phenyxpro.com with any questions or concerns about your products and a Phenyx Pro representative will contact you to provide assistance. You can also reach us through Facebook page http://www.facebook.com/phenyxusa/, our official website: www.phenyxusa.com. or our shopping website: www.phenyxpro.com.

PHENYX

Specifications

Overall System

Carrier Frequency	220 MHz-280MHz (Frequency of operation depends on local regulations)	
Frequency Stability	0.003%	
Dynamic Range	>100dB	
T.H.D	<0.5%	
Frequency Response	50Hz-18kHz	
Outputs	XLR balanced mixed; " unbalanced mixed	
Audio Output Level	0-500mV	
Range	200ft(actual range depends on local conditions)	
Operating temperature	-10 C~+50 C	

Receiver

Power	10mW	
Power	5W	
S/N	>103 dB (1kHz-A)	
Image Rejection	> 110dB	
Spurious Rejection	> 90dB	
Sensitivity	-105dBm	
XLR Output	Pin 1: Ground Pin 2: (+) Pin 3: (-)	
Power	DC12~18V, Current: 400mA, External power adaptor	

Handheld & Bodypack Transmitter

Modulation Mode	FM	
Maximum Deviation	75kHz	
Size	Handheld: 239 x 49 mm Bodypack: 110 x 63 x 20 mm	
Weight (without batteries)	Handheld: 181g Bodypack: 66g	
Power requirements	2 AA alkaline or rechargeable batteries per transmitter	
Battery life	about 8 hours	

System Description

Box contents

PTV-2000:

- 4 Channel VHF wireless receiver with balanced XLR and mixed 1/4" outputs
- 2 antennas
- 4 VHF wireless handheld microphones
- 8 AA battery
- Power adapter
- 6.5mm audio cable


System overview

The PTV-2000 is the 4-channle VHF fixed frequency wireless microphone system developed by Phenxy Technology, a truly reliable and affordable solution for wireless performance.

The setup and operation of this system is very quick and simple. It also uses high performance of voice compression and expansion technology to ensure its true and clear sound quality.

Microphones are equipped with anti-shock ring that features stable and reliable outdoor performances, ideal for conference rooms, classrooms, dance hall, KTV rooms, churches and parties. Operating distance is up to 200ft line of sight in open space.

Receiver for PTV-2000

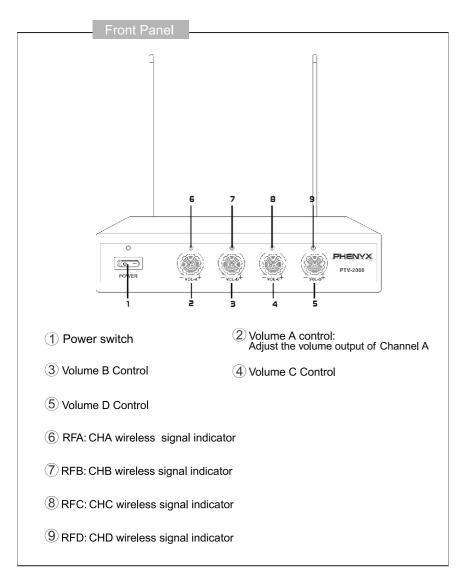

Troubleshooting Tips

ISSUE	REASON	SOLUTION
Transmitter battery indi- cator is rapidly fiashing or continuously ON	The batteries are low	Replace with fresh batteries
A howling noise (also known as "feedback") can be heard from the speakers	The microphone is too close to the speaker	Increase the distance between the microphone and the speaker Avoid pointing the microphone directly at the speaker
No sound coming to the receiver	The wireless microphone is outside of the receiver's range	Keep wireless microphone within operating range of the receiver
	The wireless transmitter is off or muted (switch set to "OFF" or "MUTE")	Turn wireless micro- phone on. Replace batteries if necessary
Sound reaches the receiver, but no sound coming from the receiver	Volume control too low	Turn up the output volume by turning the volume control buttons in the front of the receiver clockwise.
	Output is not (or wrongly) connected	Verify all connections to the rest of your system. Try different connection cables if availble.

If product is defective or for all inquiries including warranty cover, please email service@phenyxusa.com

į

Operating Instructions

Set up


- 1- Install fresh batteries in the transmitters (fresh to the section relative to the specific transmitter you are using).
- 2- Connect the AC power adapter to a wall outlet and to the back of the receiver.
- 3- Screw antenna A, B in, and position them 60 degrees apart from each other.
- 4- Connect one of the two outputs available at the back panel to the next stage in your system. Typically, use the 1/4" output to connect to unbalanced equipment such a consumer level receivers, amplifiers, and mixers. Connect to professional equipment using the XLR output (cable not included).
- 5- Making sure the volume of your speakers is off, turn on the receiver and the transmitters. The RF LED lights up, indicating that the corresponding transmitter is paired with the receiver.
- 6- Turn the volume of your speakers back on and start increasing the volume of the transmitters until proper volume is achieved.

Operation

For better result, keep the transmitter at least 2' away from the receiver but within the transmitter's range (200ft). Keep the transmitters in a direct line of sight with the receiver whenever possible.

Electronics devices such as mobile phones, radios, and other transmitting devices may interfere with the wireless system transmitters. Please keep transmitter and receiver away from those devices and other possible interfering sources.


Back Panel

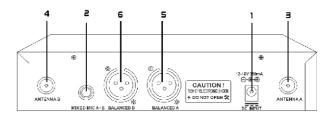

- 1 Power jack: Connect AC/DC adapter to receiver
- 2 ¼" audio output jack: Connect the audio cable from this jack to the input port of amplifier, mixer, or other PA systems.
- (3) Antenna A
- 4 Antenna B
- (5) Balanced A: Balanced XLR output for CHA and CHB
- 6 Balanced B: Balanced XLR output for CHC and CHD

Transmitters

Handheld Microphone



- (1) Battery power indicator
- 2 ON/MUTE/OFF switch
- 3 Battery compartment cover

Under normal operation, the battery power indicator (1) will briefly light up when powering on the microphone.


If the battery power indicator (1) stays continuously on after powering on the microphone, the batteries must be replaced. To replace the batteries, proceed as follows:

- Unscrew the battery compartment cover (3) and set it aside
- After removing the old batteries, insert new ones, making sure to respect proper polarity
- Screw the battery compartment cover (3) back in place

If the system is not to be used for long periods of time, remove the batteries from the transmitter and unplug the power adapter from the receiver and the main outlet. This can avoid damage when the system is not in use.

Bodypack

The Phenyx VHF bodypack is to be used with the Phenyx lavalier microphone & headsets.

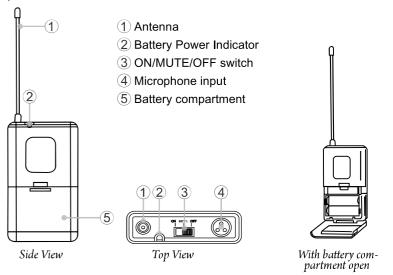

Set Up:

- 1- Secure the bodypack to clothing, belt or pocket.
- 2- (a) For a lavalier microphone, clip the microphone to clothing about 1 foot under the mouth.
 - (b) For a headset, install headset comfortably on head so the microphone can be placed close to the mouth.
- 3- Connect the microphone audio connector to the bodypack microphone input (4)
- 4- Turn the bodypack on by sliding the the ON/MUTE/OFF switch to the "ON" position. The battery power indicator (2) will light up briery, indicating that the batteries have sufficient power.

If the battery power indicator (3) stays continuously on after powering on the bodypack, the batteries must be replaced. To replace the batteries, proceed as follows:

- Open the battery compartment door by pushing on the door sides and pulling it open
- After removing the old batteries, insert new ones, making sure to respect proper polarity
- Close compartment by gently pushing the compartment door until it clicks