
## Assembly instructions for 7ft IBF-COL Module.


Fasteners.

IBF-Col-7

## Tools needed:


- (1) Hammer
- (1) Power drill
- (1) Level
- \*Suggested 18 guage Brad Gun with 1¼" brad nails will make install easier.



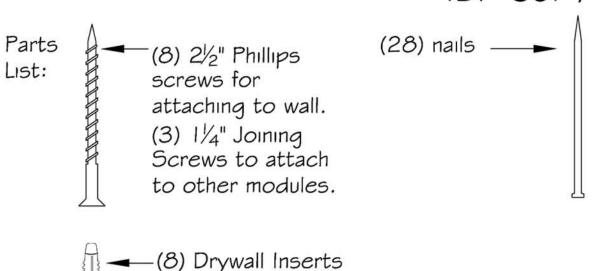




Assembly instructions for 7ft IBF-COL Module. Racking. IBF-COL-7

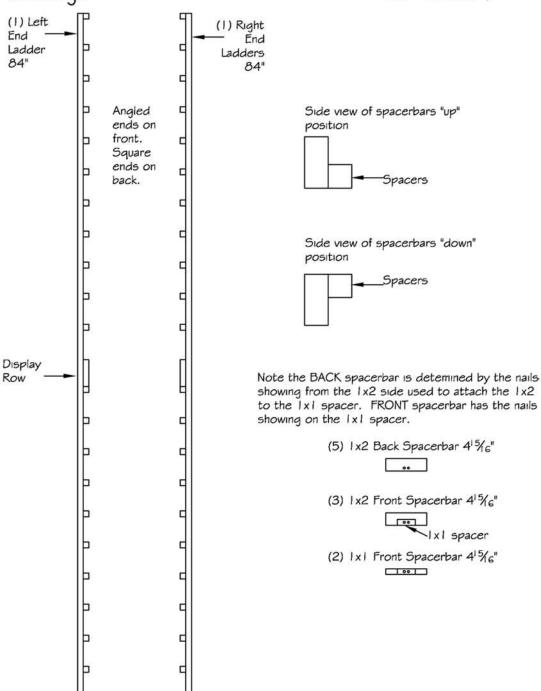


step



Step 1: (Attaching back spacerbars)
Place the right and left end ladders on the floor, making sure the angled rails are facing the floor. On the 1st, 7th, 11th, 16th and 22nd rungs, nail the end ladders to a spacerbar. The spacerbars need to be "up" so that the small block of wood is towards the bottom.


step 3 Finish



step 2

Step 3: (Finish)

Fasten to the wall through the back supports using the  $2\frac{N}{2}$ " screws and using a level to make sure the rack is mounted square on the wall,



Step 2: (Attaching  $1\times2$  \$  $1\times1$  front spacerbars) Stand rack up. Starting from the bottom, place a  $1\times2$  spacerbar on the 1st, 11th and 22nd rungs, and a 1x1 spacerbar at the 7th and 16th rung. Place one nall into each ladder to secure into place. All but the bottom spacerbar needs to be "up" so that the small block of wood is towards the floor.

